


Schwenkkopf





Milling and drilling head, swivelling

Tête pivotante

+105°/ -20° Schwenkbar
+105°/ -20° swiveling
+105°/ -20° pivotant




Darstellung symbolisch
symbolical drawing
schéma symbolique

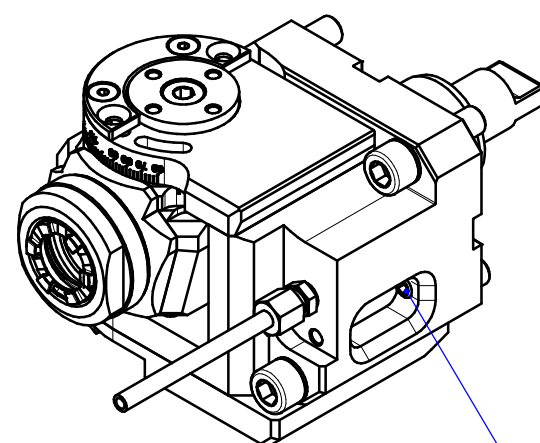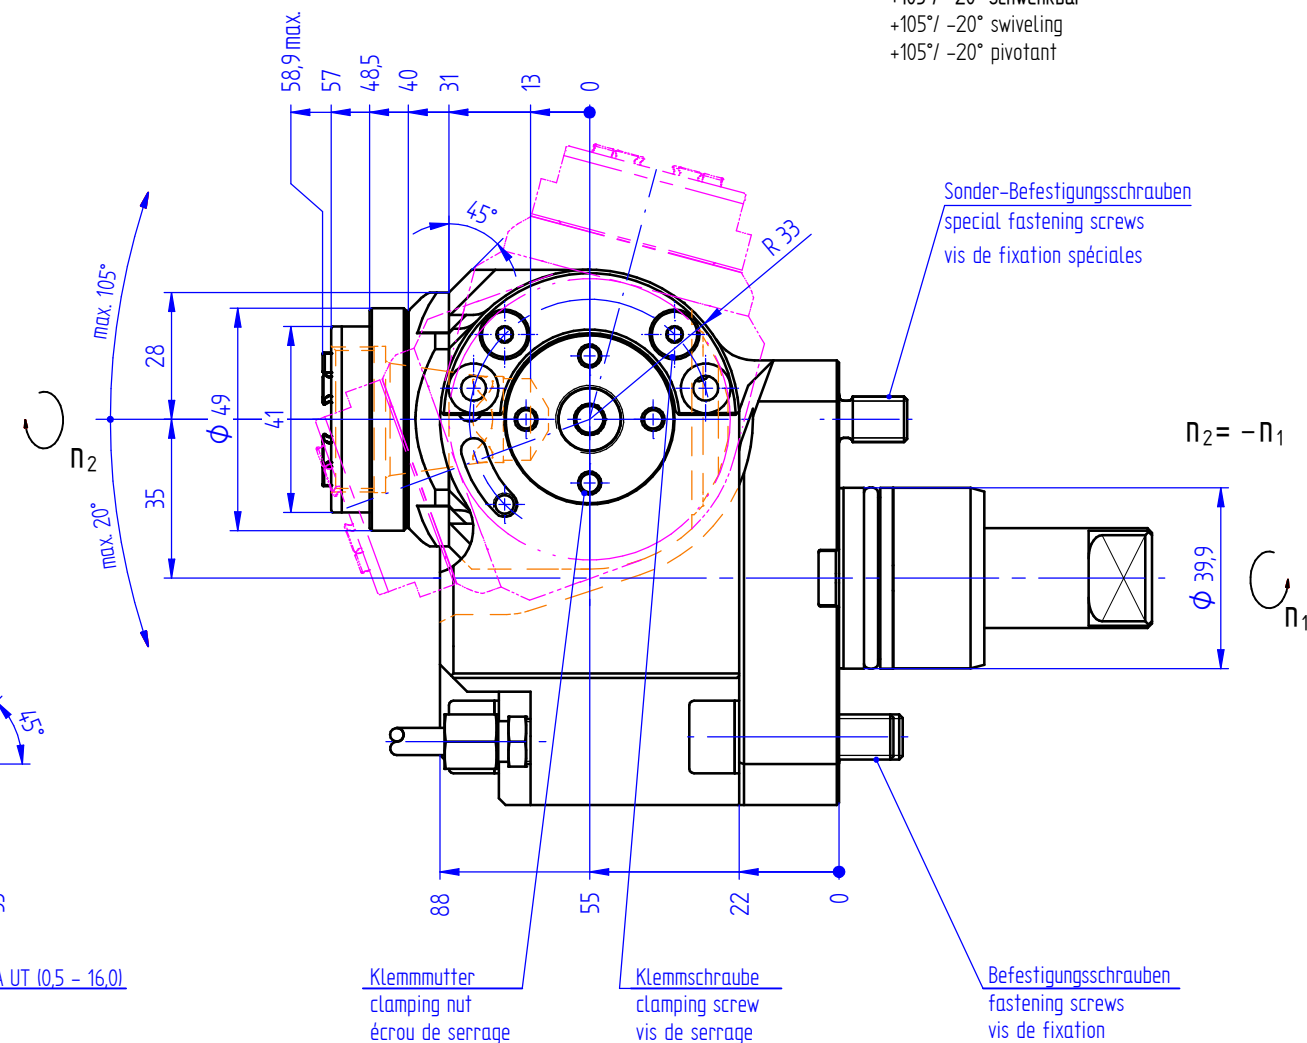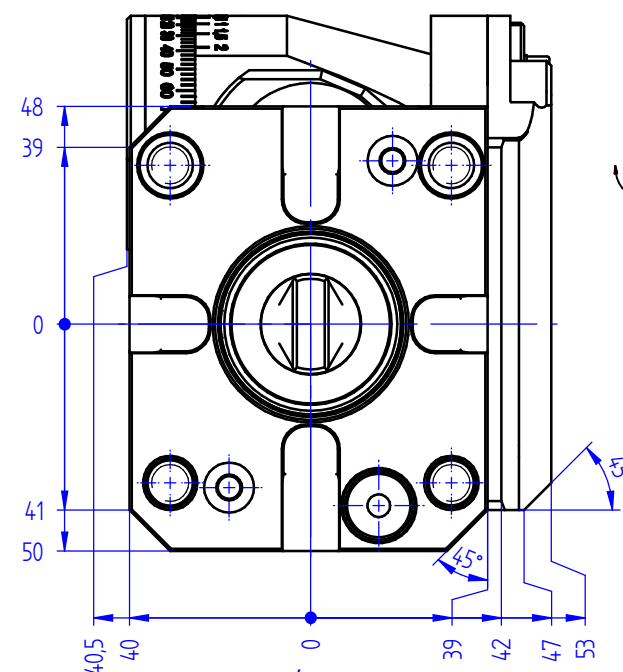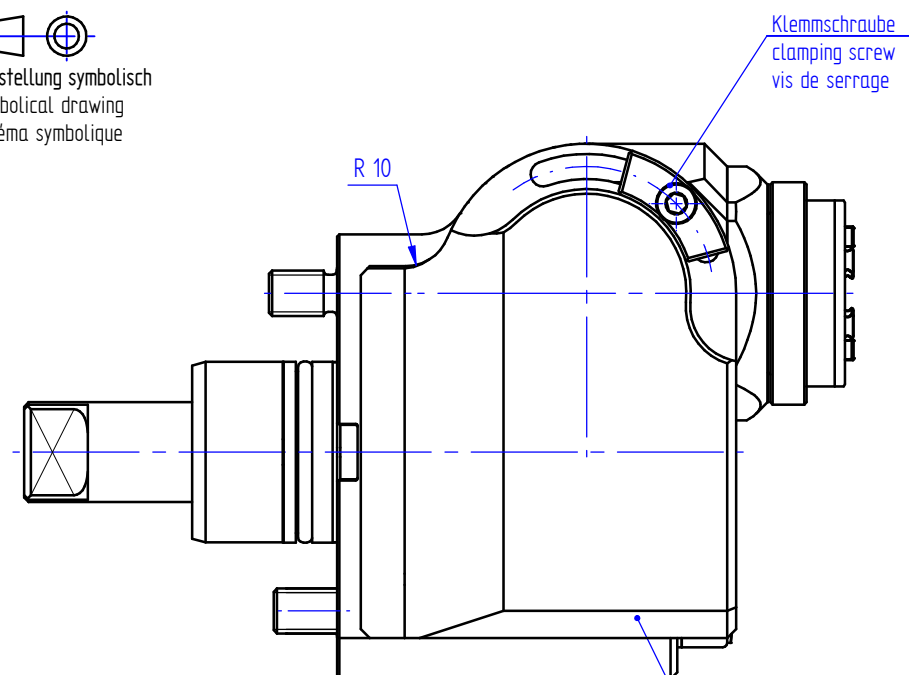

180° umsetzbar
180° convertible
interchangeable de 180°

Klemmschraube für
Sonder-Befestigungsschraube (2x)
clamping screw for
special fastening screw (2x)
vis de serrage pour
fixation spéciale (2x)

Schraube zum Abdrücken
screw to push away
vis pour écarter

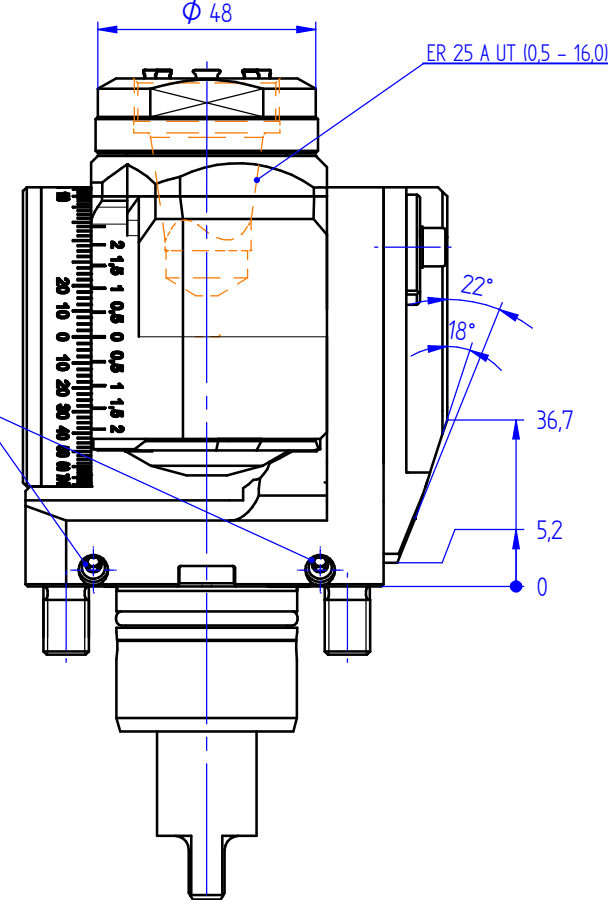

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

i = 1:1

M₂ max. [Nm] = 25

n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 043 45 009

nous nous réservons toutes modifications techniques