



Axial-Bohr- und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale




Darstellung symbolisch
symbolical drawing
schéma symbolique

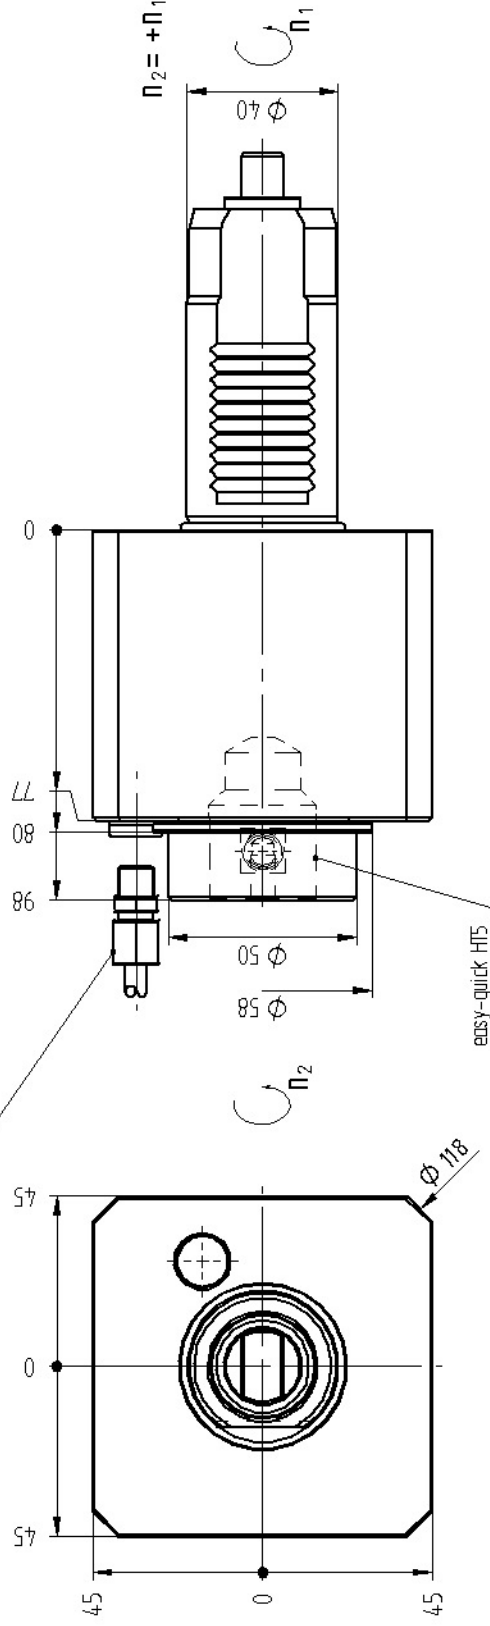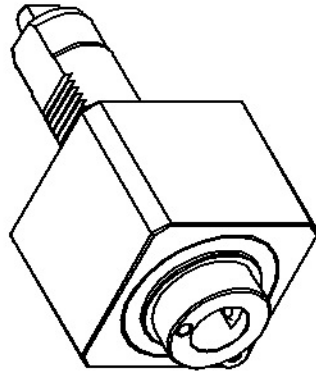

bei externer Kühlmittelfuhr Verschlusschraube durch Kuhlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

Options :
options :
options :

wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienschlüssel
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

p max.	[bar] =	25
i	=	11
M ₂ max.	[Nm] =	80
n ₂ max.	[min ⁻¹] =	5000

Bestell - Nr.

ref.no. / No.de cde.

8 010 47 084