


Winkelkopf

Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

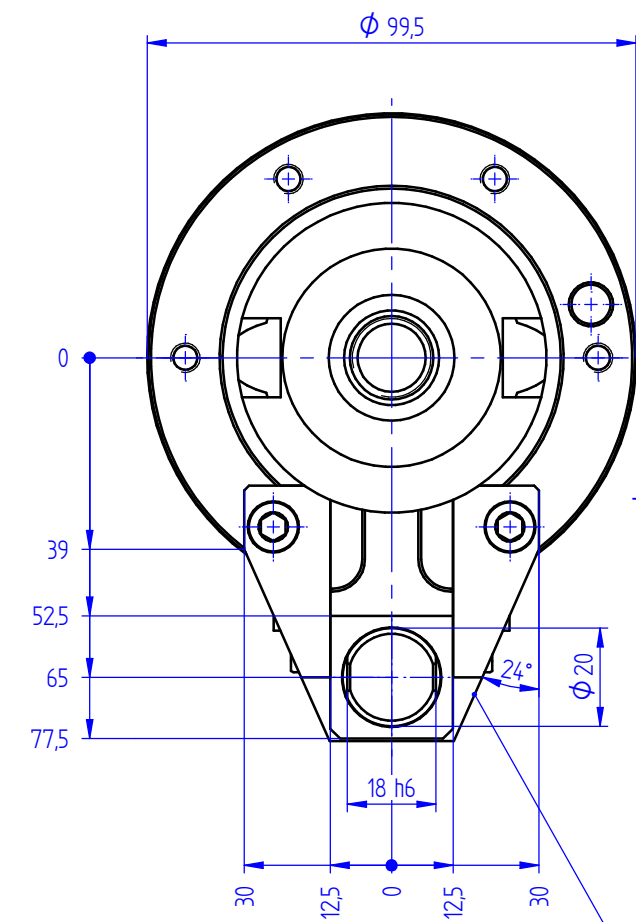

Winkelkopf 7 030 45 010
Angle head 7 030 45 010
Tête angulaire 7 030 45 010

360° drehbar
360° turnable
360° tournable

Lage der Drehmomentstütze kann zu den
Nuten der Welle eingestellt werden
Position of the location device can be
adjusted to the slots at the taper
La position du segment d'arrêt peut être
ajustée à la rainure du cône

ER 25 A UT (0,5 - 16,0)



$n_2 = -n_1$

Skalierung
graduation
graduation


Gehäusenull
gauge line of housing
cote zéro-corps de porte

Arreterring muß beim
Kunden eingestellt werden
ring has to be adjusted
by customer
la bague d'arrêt doit être
ajustée par le client

MAS 403 BT 40

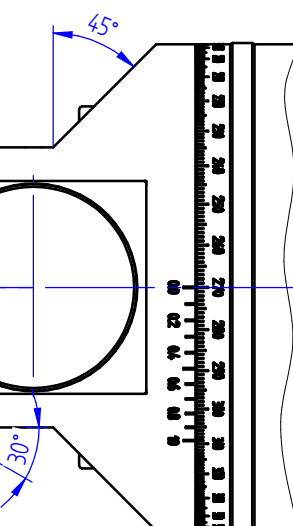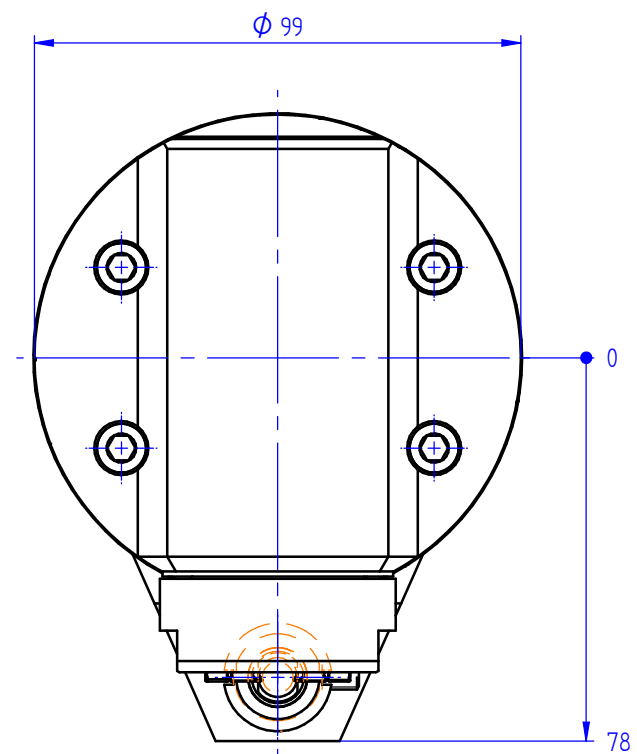

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

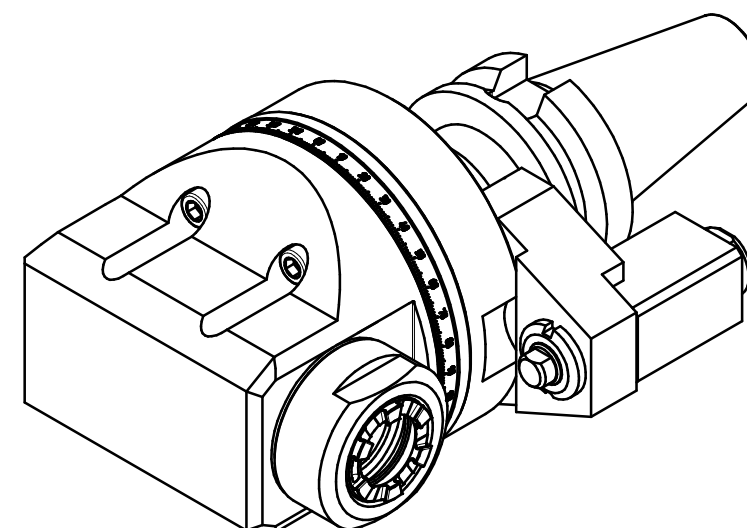

ohne Kühlmittel
without coolant
sans arrosage

$i = 1:1$
 $M_2 \text{ max. [Nm]} = 25$
 $n_2 \text{ max. [min}^{-1}] = 8000$

Bestell - Nr.
ref.no. / Node cde.

7 030 45 022

Optionen :
options :
options :




Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques