



Axial-Fräs- und Bohrkopf

Axial milling and drilling head

Tête de fraisage et de perçage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

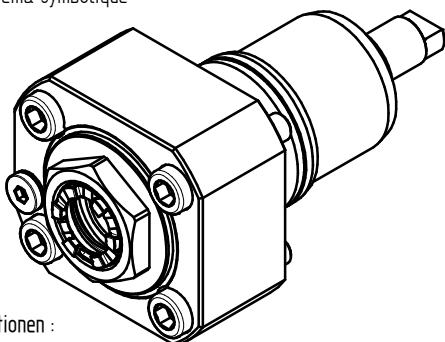

Optionen :
options :
options :



Dichtscheiben
sealings
joints




Spannzangen
collets
les pinces



Bedienschlüsselsatz
set of wrench
jeu de clés




Wechseleinsatz u-tec
insert u-tec
insert u-tec

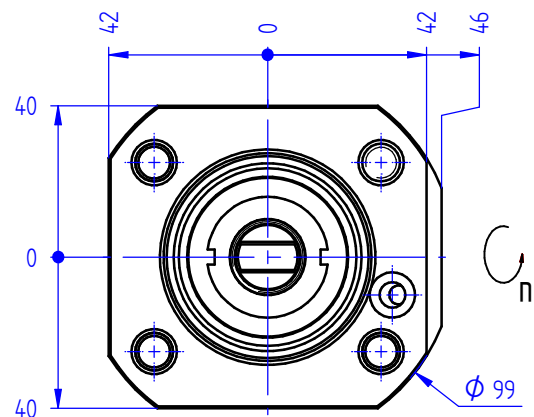

n_2

ER 25 A UT (0,5 - 16,0)

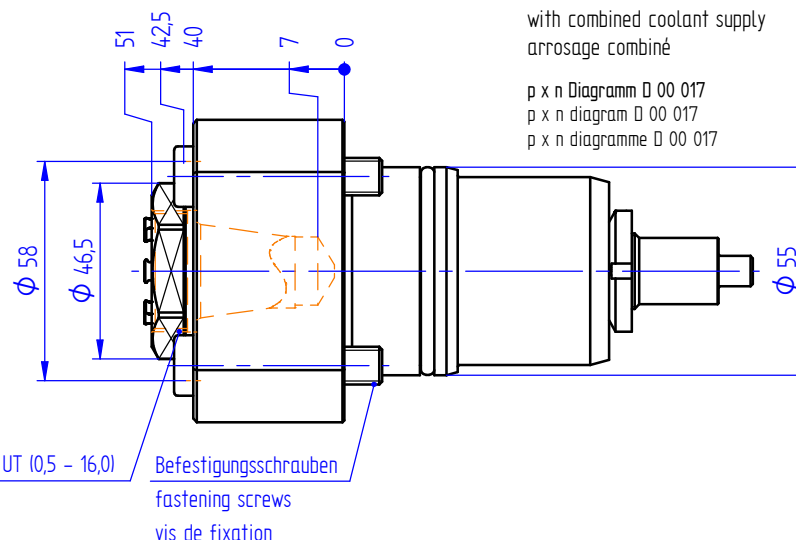

Befestigungsschrauben
fastening screws
vis de fixation

Trockenlauf möglich
dryrun possible
Possibilité d'un fonctionnement à sec

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)


mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

p x n Diagramm D 00 017
p x n diagram D 00 017
p x n diagramme D 00 017

$n_2 = +n_1$

n_1

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

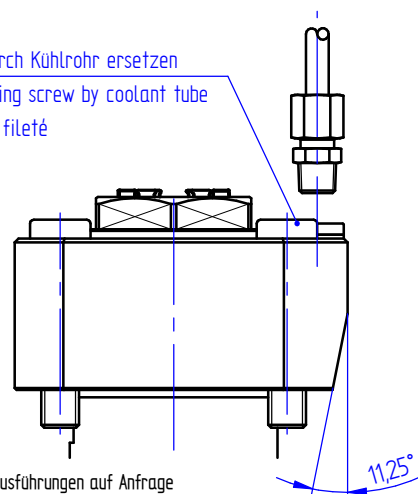

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

subject to technical changes

p max. [bar] = 100

i = 1:1

M_2 max. [Nm] = 50

n_2 max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 010 55 035

nous nous réservons toutes modifications techniques