



Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

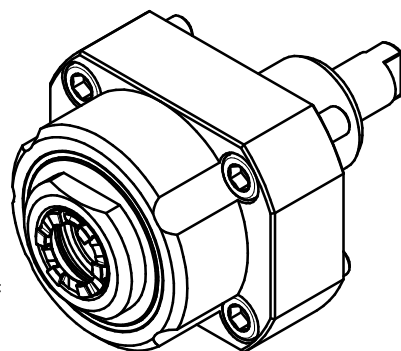

Optionen :
options :
options :



Dichtscheiben
sealings
joints





Spannzangen
collets
Les pinces



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

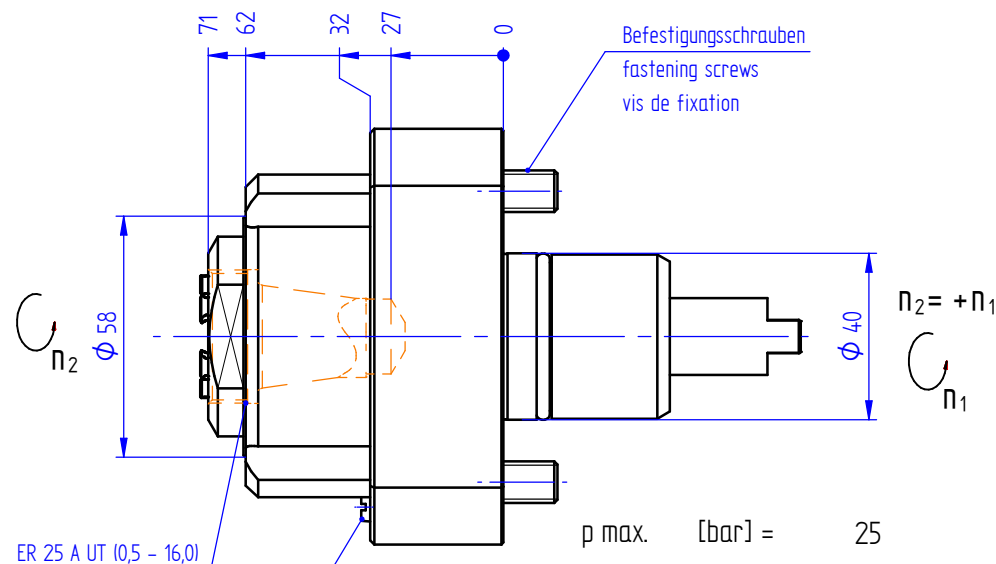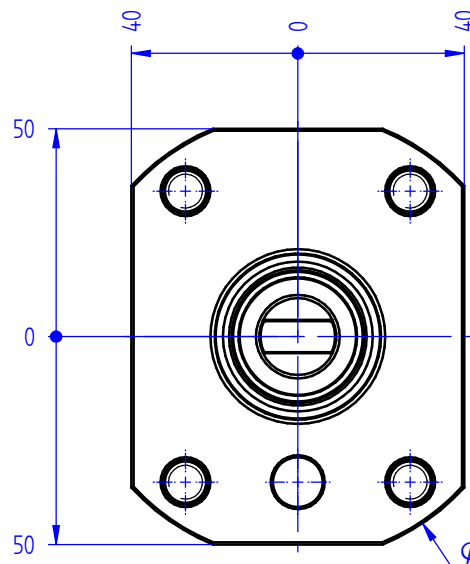

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

p x n Diagramm D 00 003
p x n diagram D 00 003
p x n diagramme D 00 003

Befestigungsschrauben
fastening screws
vis de fixation

bei externer Kühlmittelzufuhr Schraube entfernen
for external coolant supply, take off screw
pour arrosage externe, enlevez la vis

p max. [bar] = 25
i = 1:1
M₂ max. [Nm] = 50
n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 010 45 175

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

subject to technical changes

nous nous réservons toutes modifications techniques