

Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

Optionen :
options :
options :



Dichtscheiben
sealings
joints




Spannzangen
collets
Les pinces



Bedienschlüsselsatz
set of wrench
jeu de clés



Wechseleinsatz u-tec
insert u-tec
insert u-tec

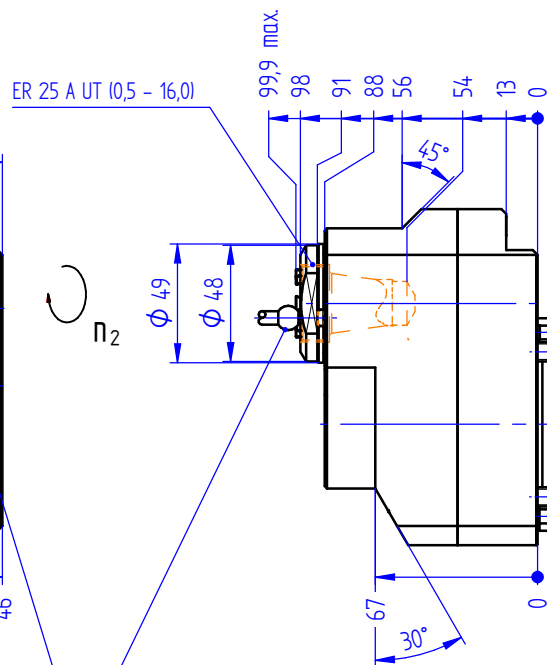


Befestigungsschrauben
fastening screws
vis de fixation

$$n_2 = -\frac{1}{i} \times n_1$$



R 16

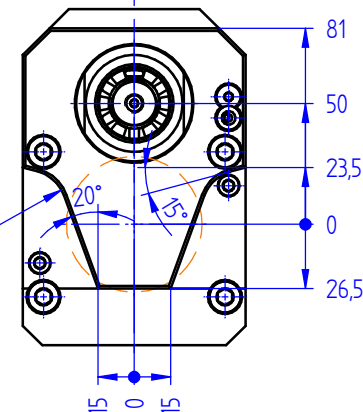

p max. [bar] = 140


i = 1:2

M₂ max. [Nm] = 40

n₂ max. [min⁻¹] = 12000

Bestell - Nr.
ref.no. / No.de cde.

8 019 55 019

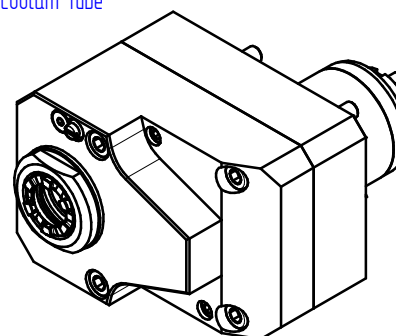

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

Gewindestift zum Abdrücken
thread screw to push away
aide au démontage

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques