



Axial-Bohr-und Fräskopf

Axial drilling and milling head


Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

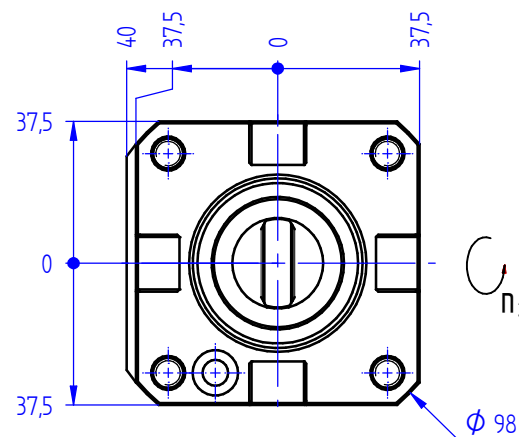

easy-quick HT5

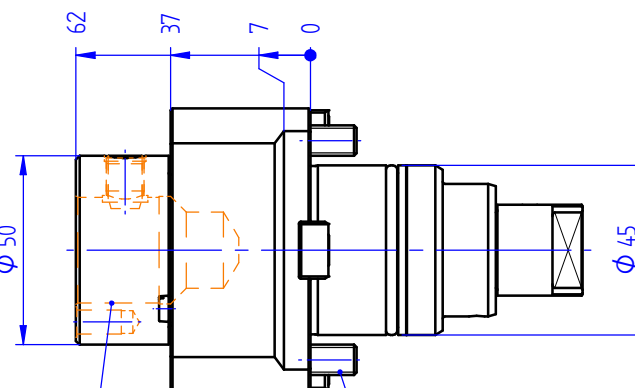

$n_2 = +n_1$



Befestigungsschrauben
fastening screws
vis de fixation

Optionen :
options :
options :


bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienschlüssel
wrench
clé

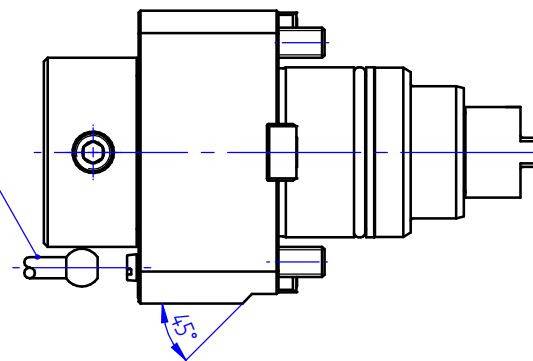

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

subject to technical changes

p max. [bar] = 25
i = 1:1
M₂ max. [Nm] = 32
n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 010 47 136

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques