



Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

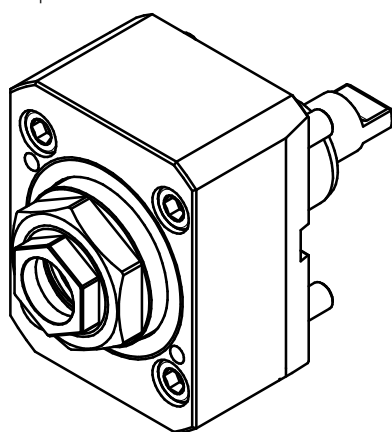

Optionen :
options :
options :



Dichtscheiben
sealings
joints




Spannzangen
collets
les pinces



Bedienschlüsselsatz
set of wrench
jeu de clés



Wechseleinsatz u-tec
insert u-tec
insert u-tec

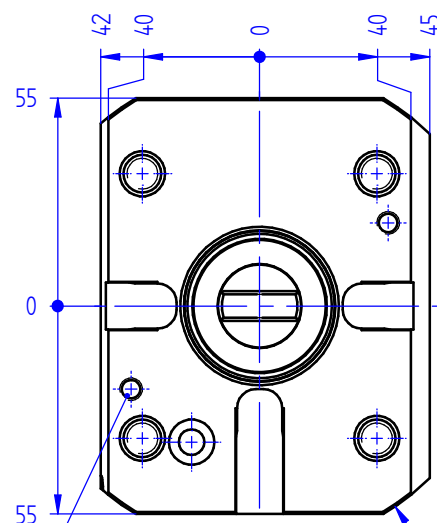

ER 32 A UT (1,0 - 20,0)

Ø 128

bei externer Kühlmittelzufuhr Schraube entfernen
for external coolant supply, take off screw
pour arrosage externe, enlevez la vis

Befestigungsschrauben
fastening screws
vis de fixation

9°

9°

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande


subject to technical changes

Trockenlauf möglich
dryrun possible
Possibilité d'un fonctionnement à sec

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

p x n Diagramm D 00 018
p x n diagram D 00 018
p x n diagramme D 00 018

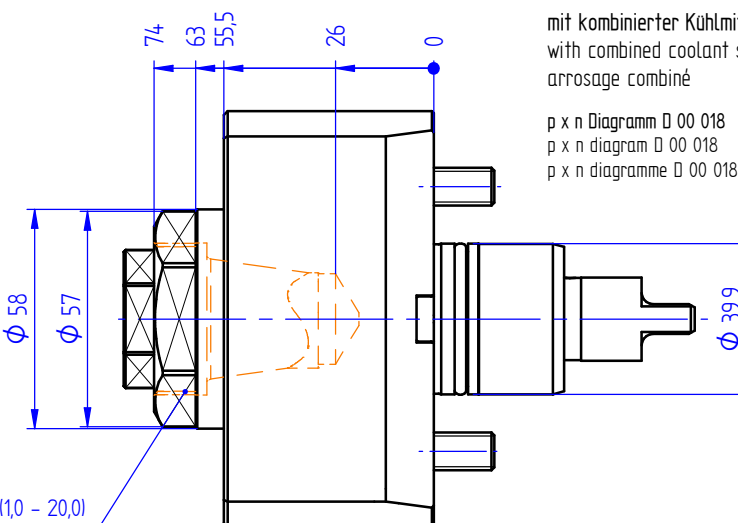

$n_2 = +n_1$



p max. [bar] = 80

i = 1:1

M₂ max. [Nm] = 50

n₂ max. [min⁻¹] = 10000

Bestell - Nr.
ref.no. / No.de cde.

8 010 46 306

nous nous réservons toutes modifications techniques