



Winkelkopf

Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

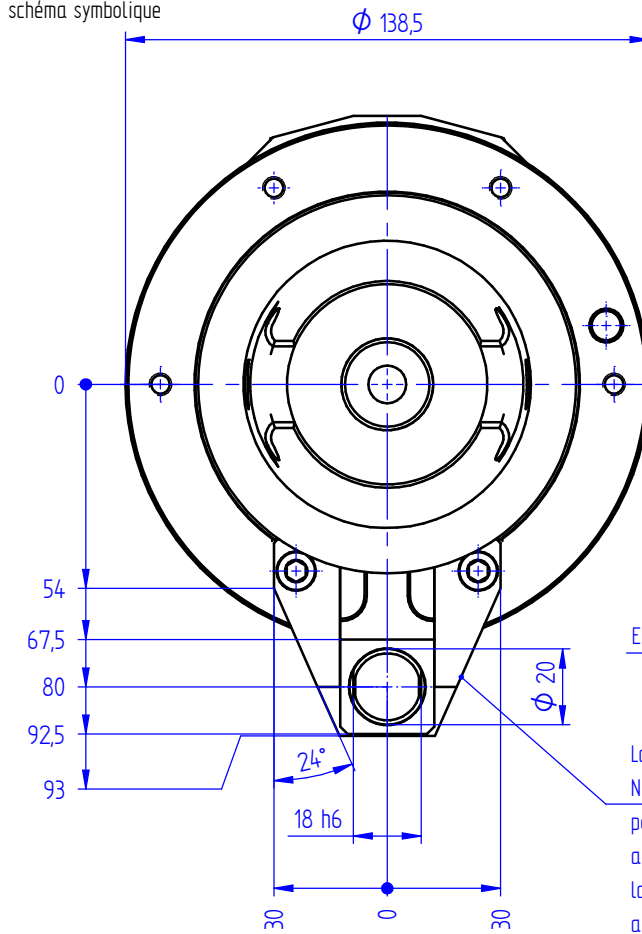

Winkelkopf 7 033 76 003
angle head 7 033 76 003
tête angulaire 7 033 76 003

360° drehbar
360° turnable
pivotable à 360°

Skalierung
graduation
graduation

Gehäusenull
gauge line of housing
cote zéro-corps de porte


Arretiererring muß beim
Kunden eingestellt werden
ring has to be adjusted
by customer
la bague d'arrêt doit être
ajustée par le client

DIN 69893 - HSK-A 100

ER 32 (1,0 - 20,0)

$n_2 = +n_1$


Lage der Drehmomentstütze kann zu den
Nuten der Welle eingestellt werden
position of the location device can be
adjusted to the slots at the taper
la position du segment d'arrêt peut être
ajustée à la rainure du cône

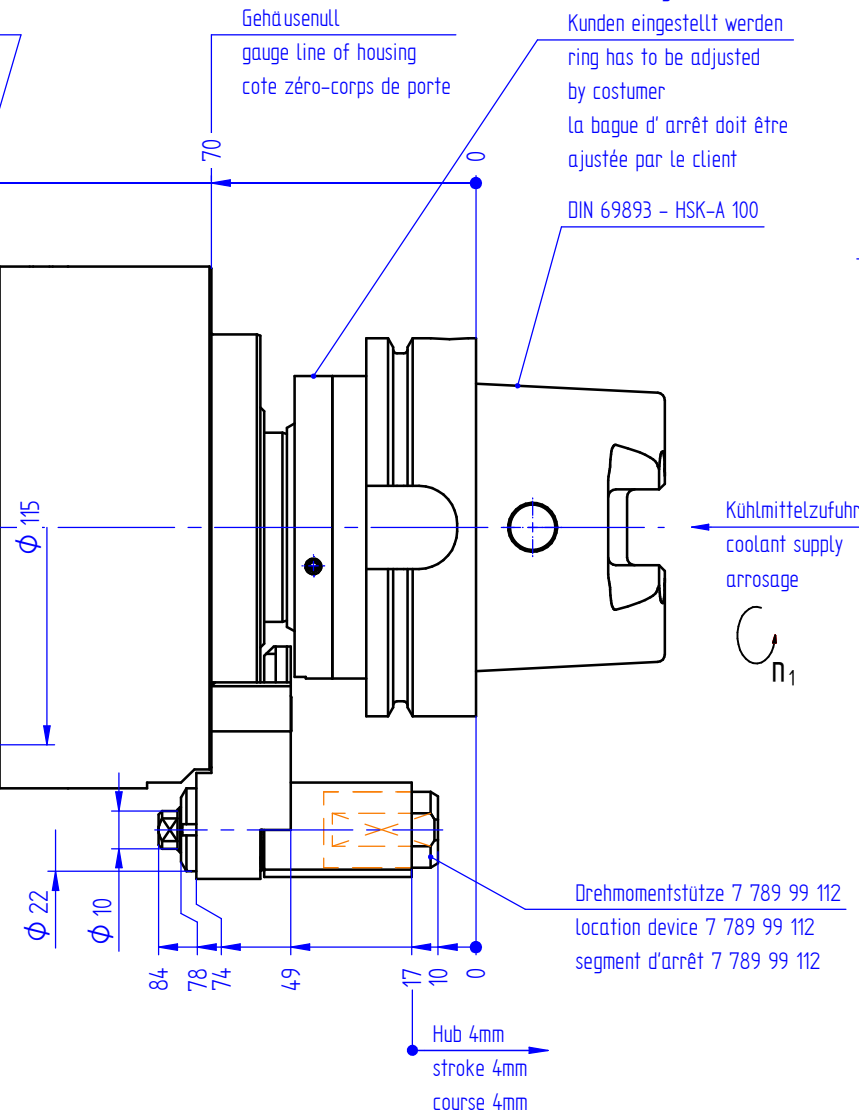

Kühlmittelzufuhr
coolant supply
arrosage

Drehmomentstütze 7 789 99 112
location device 7 789 99 112
segment d'arrêt 7 789 99 112

Hub 4mm
stroke 4mm
course 4mm

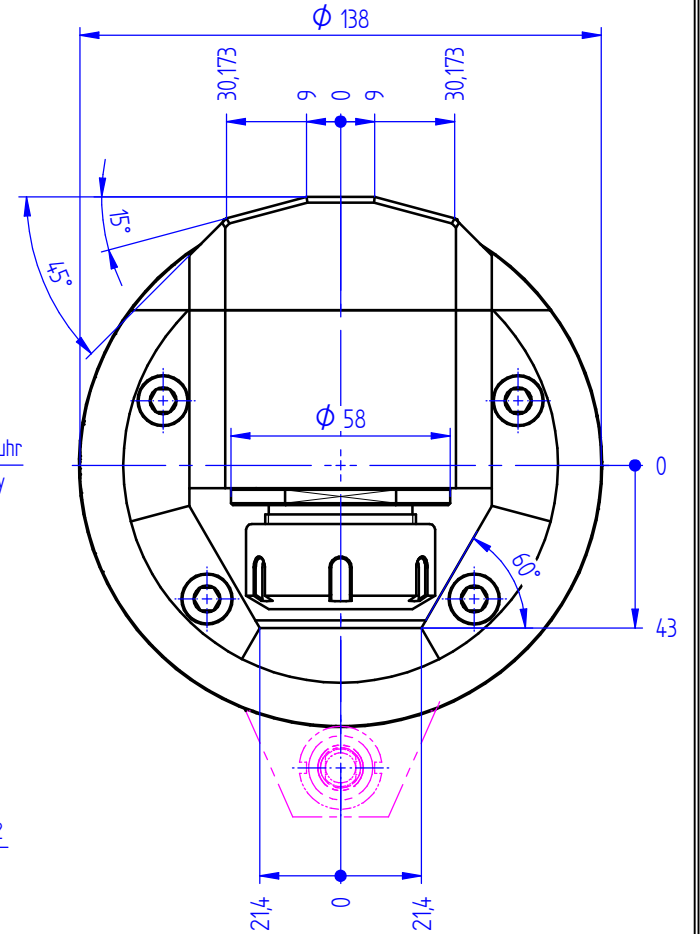

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)

p x n Diagramm D 00 008
p x n diagram D 00 008
p x n diagramme D 00 008

Optionen :
options :
options :



Dichtscheiben
sealings
joints




Spannzangen
collets
les pinces




Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

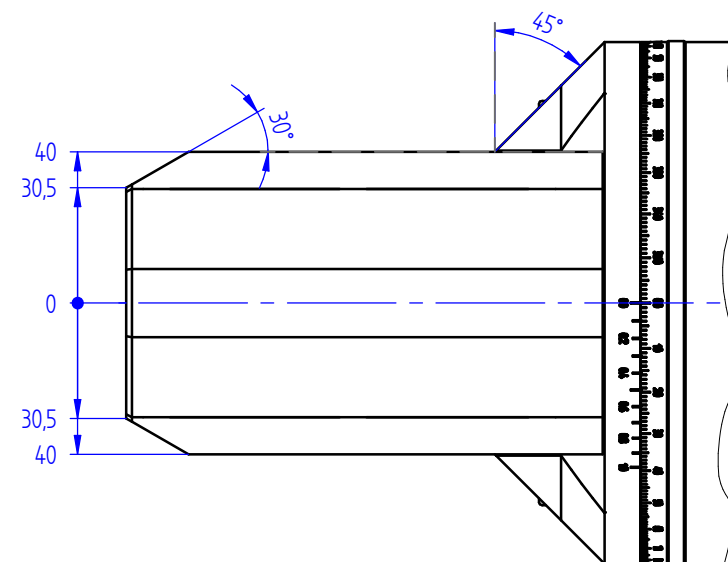

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

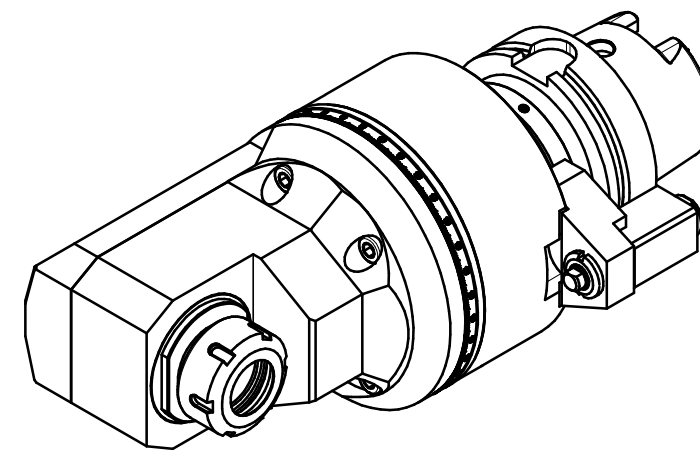

p max. [bar] = 70
i = 1:1
M₂ max. [Nm] = 50
n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

7 033 76 019

nous nous réservons toutes modifications techniques