

Axial-Bohr- und Fräskopf




Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

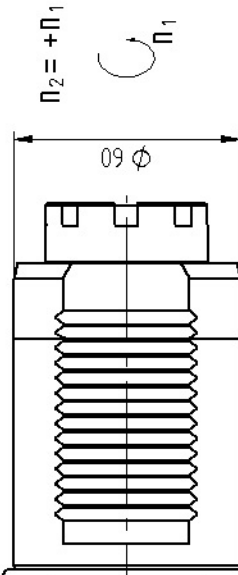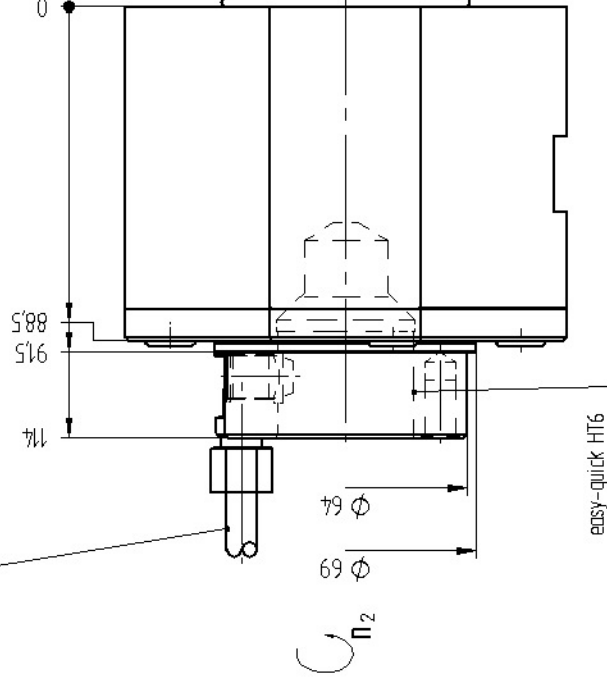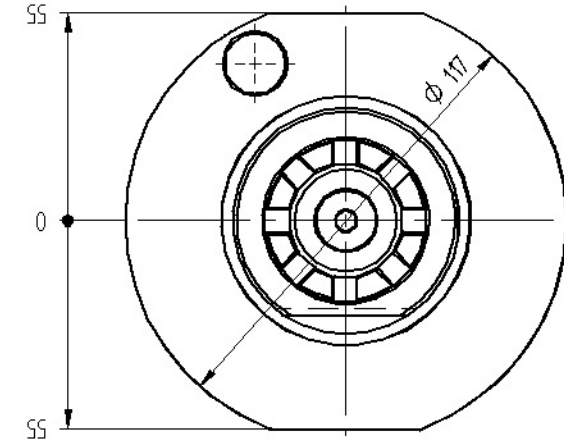

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienschlüssel
wrench
clé

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

p max. = 25 bar
i = 1:1
M₂ max. = 100 Nm
n₂ max. = 4000 min⁻¹

Bestell - Nr.

ref.no. / No.de cde.

8 010 68 026

nous nous réservons toutes modifications techniques