




Schwenkkopf

Milling and drilling head, swivelling

Tête pivotante



Darstellung symbolisch
symbolical drawing
schéma symbolique

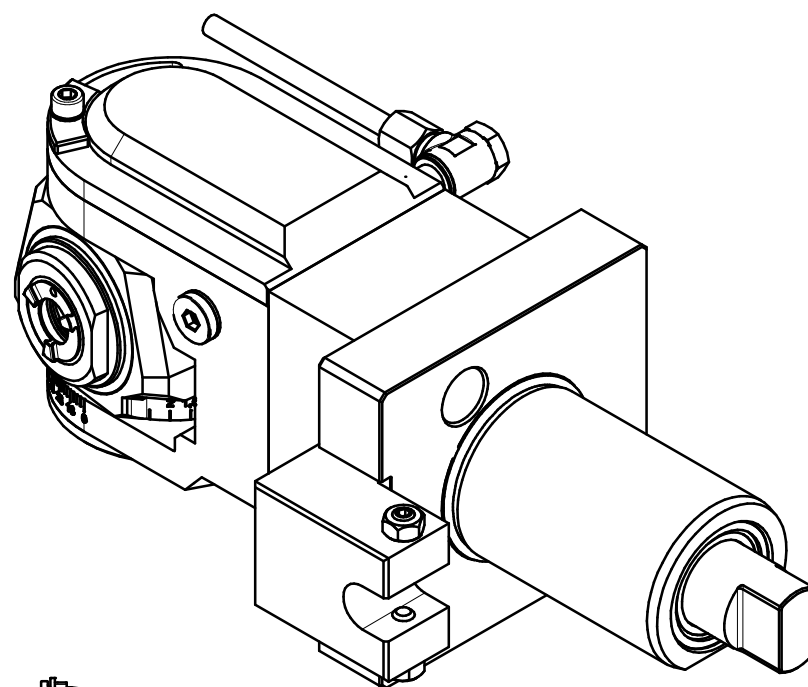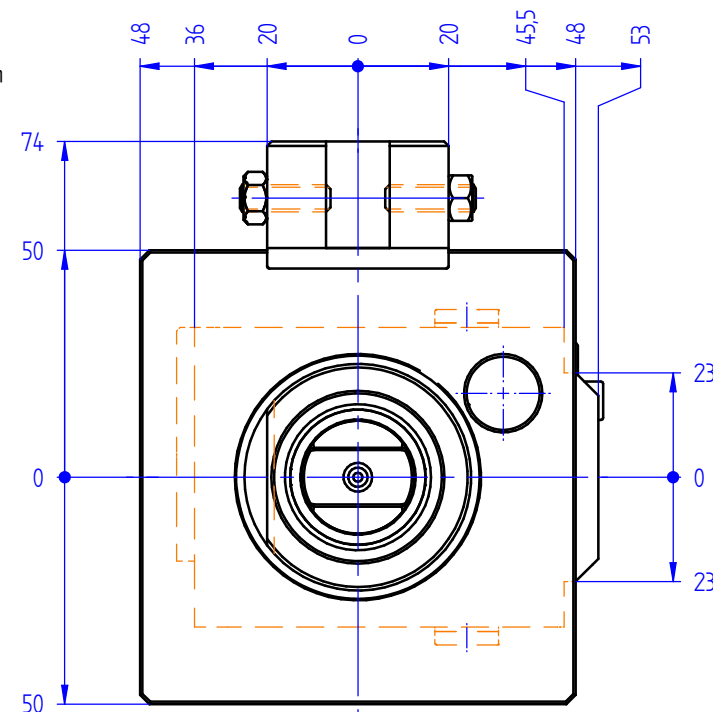

Optionen :
options :
options :



Dichtscheiben
sealings
joints




Spannzangen
collets
les pinces



Bedienschlüsselsatz
set of wrench
jeu de clés



Wechseleinsatz u-tec
insert u-tec
insert u-tec

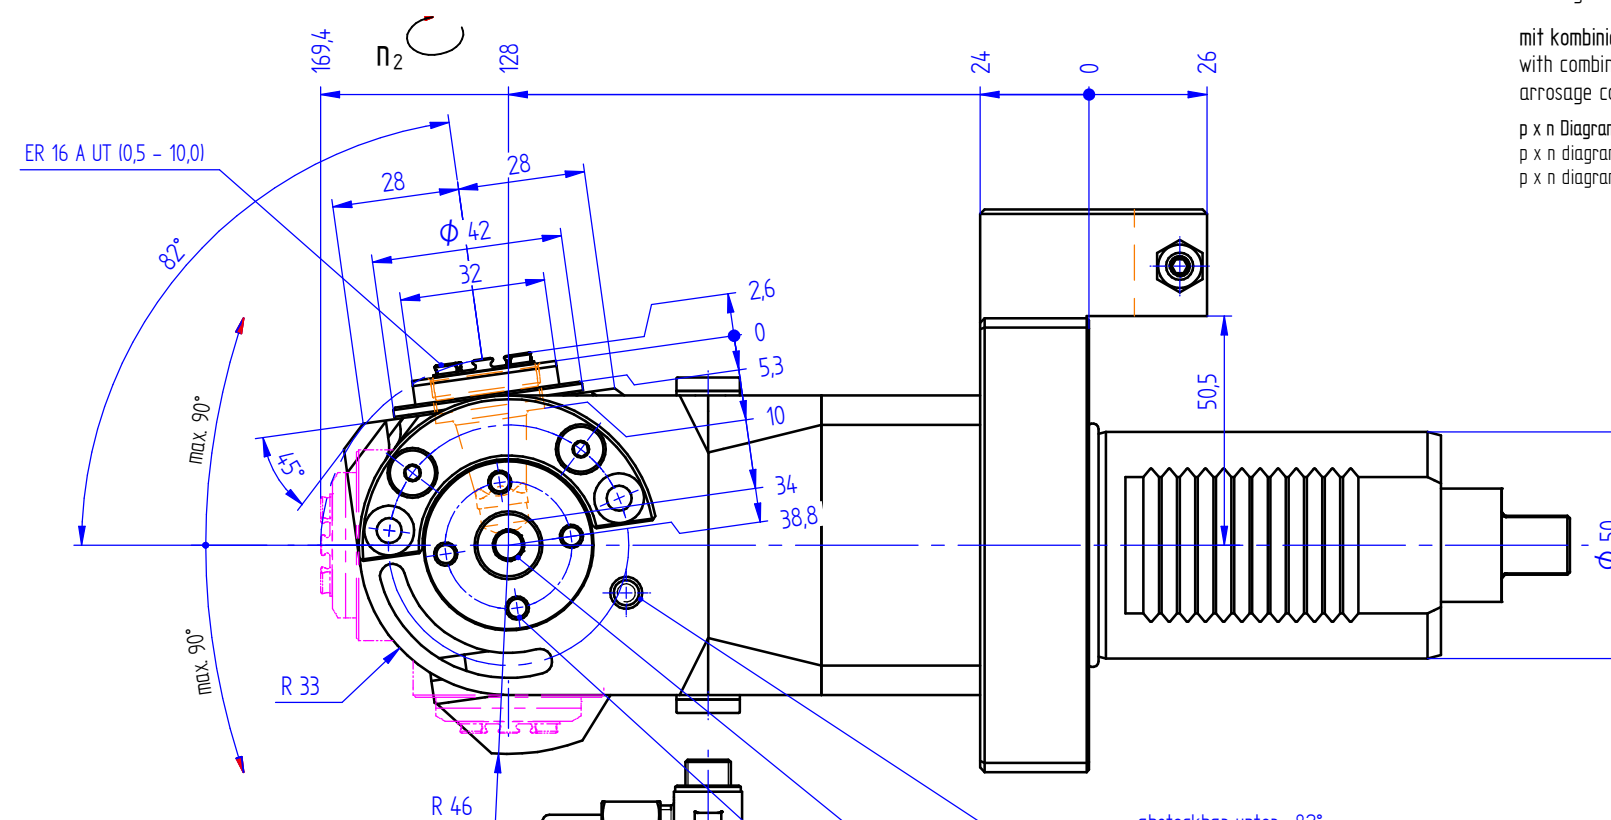

absteckbar unter +82°

possibility to fix the inclination at +82°

possibilité de fixer l'inclinaison à +82°

Klemmschraube

clamping screw

vis de serrage

Klemmmutter


clamping nut

écrou de serrage

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen

using external coolant supply, please substitute locking screw by coolant tube

pour arrosage externe, remplacez la vis par le tube fileté

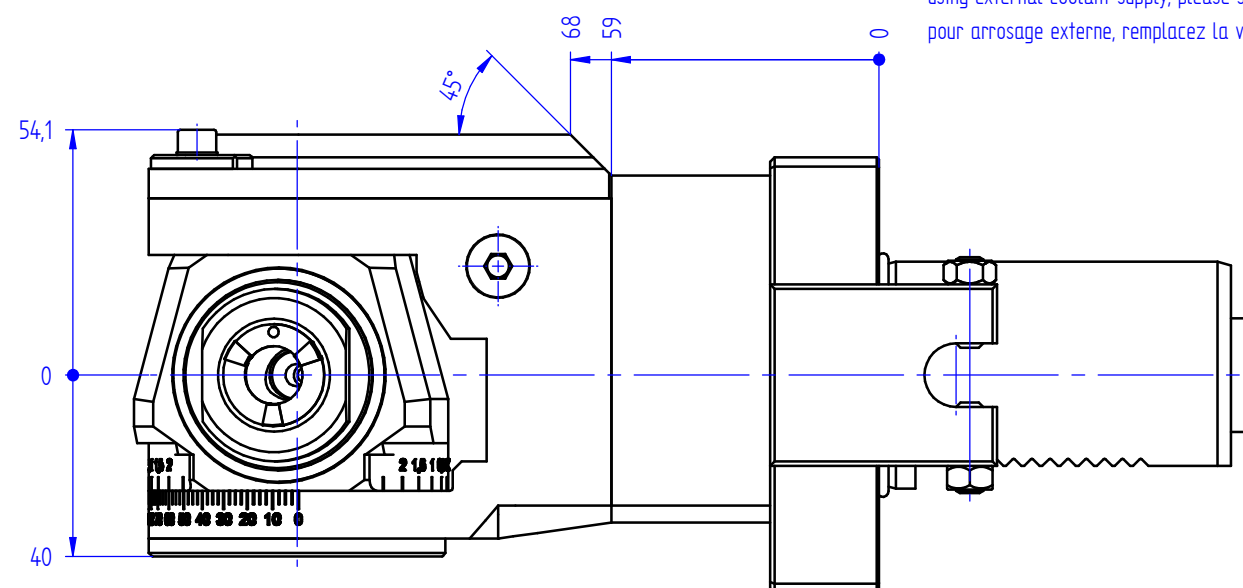

$$n_2 = -\frac{1}{i} \times n_1$$

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

p x n Diagramm D 00 010

p x n diagram D 00 010

p x n diagramme D 00 010

p max. [bar] = 140

i = 1:2

M₂ max. [Nm] = 12

n₂ max. [min⁻¹] = 12000

Bestell - Nr.
ref.no. / Node cde.

8 040 54 026

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques