

Axial-Bohr- und Fräskopf



Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

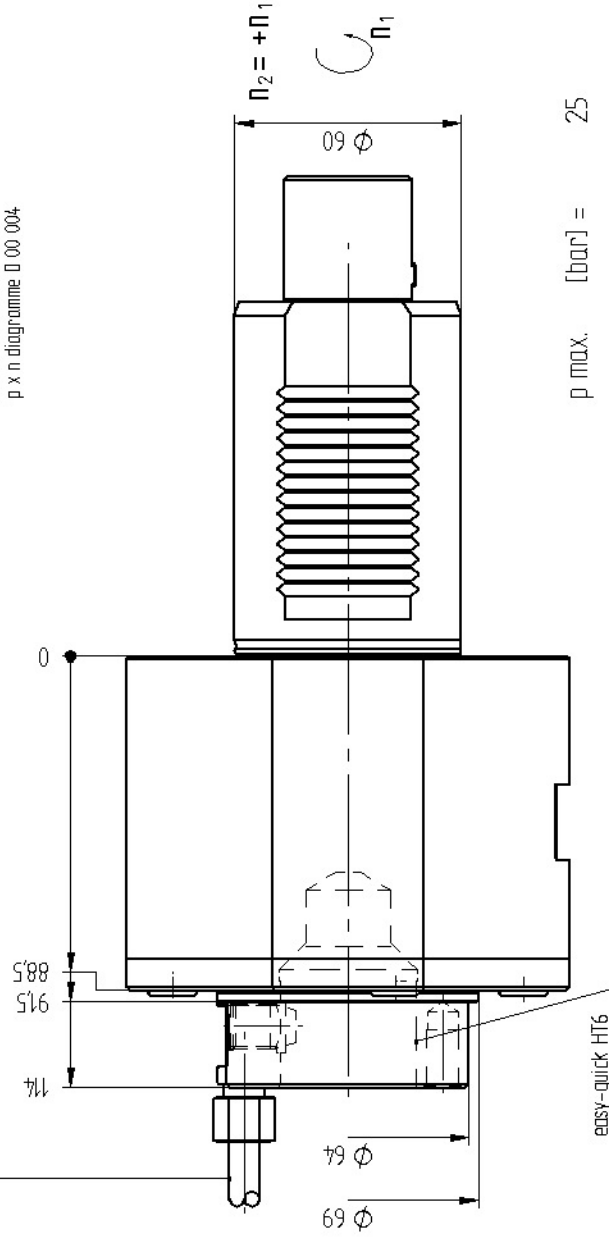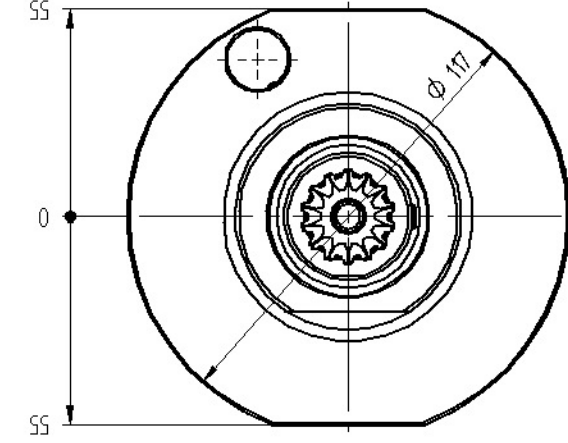

easy-quick HT6

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienchlüssel
wrench
clé

Technische Änderungen vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

p max. [bar] = 25
i = 1:1
M₂ max. [Nm] = 100
n₂ max. [min⁻¹] = 4000

Bestell - Nr.

ref.no. / No de cde.

8 010 68 033

nous nous réservons toutes modifications techniques