



Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

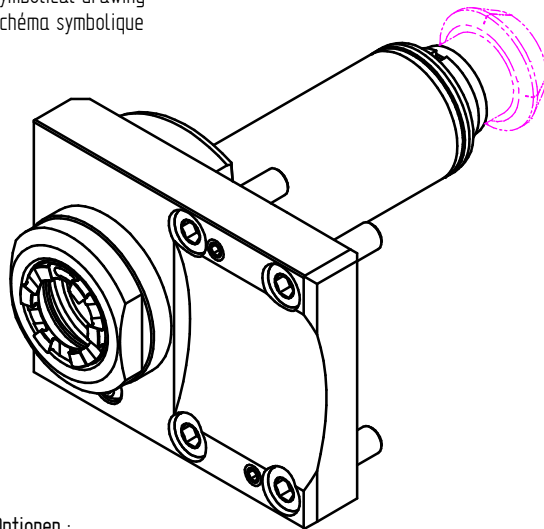

Optionen :
options :
options :



Spannzangen
collets
les pinces





Gewindebohrzangen
tapping collets
pinces de taraudage




Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

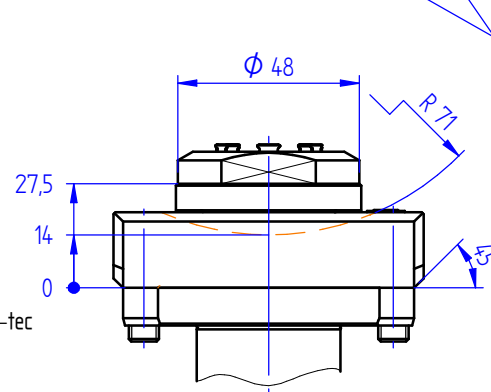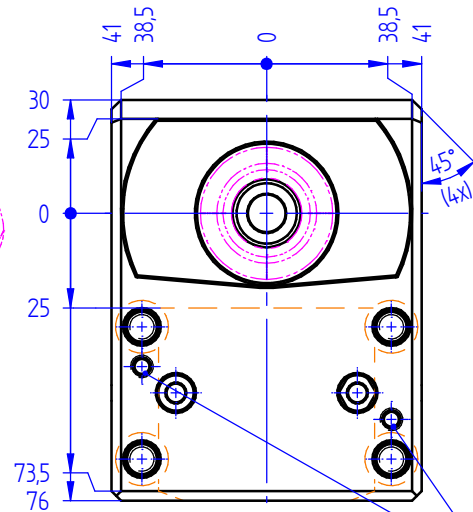


Gewindestift zum Abdrücken
thread screw to push away
vis pour écarter



ER 25 A UT (0,5 - 16,0)

Scheibe zur Abstimmung des Kegelrades
Spacer for adjustment of the bevel gear
entretoise à ajuster

gehört nicht zum Lieferumfang
has to be ordered separately
est à commander séparément

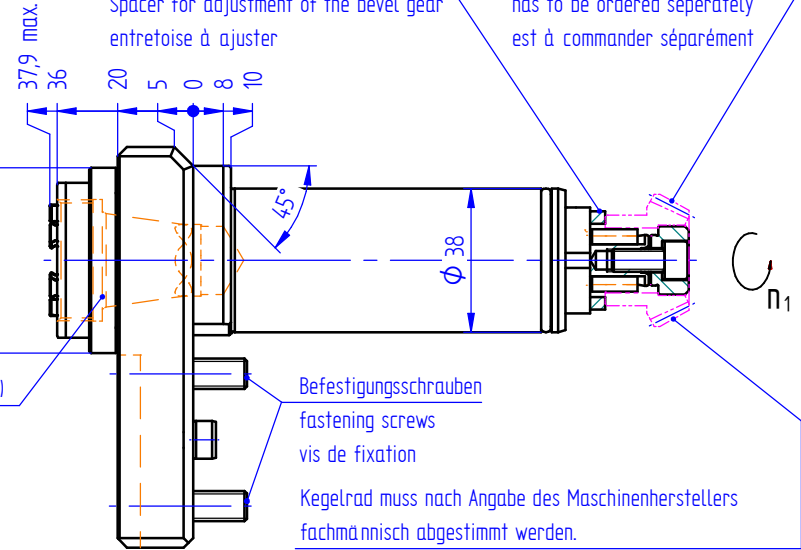

$i = 1:1$
 $M_2 \text{ max. [Nm]} = 10$
 $n_2 \text{ max. [min}^{-1}] = 8000$

Bestell - Nr.
ref.no. / No.de cde.

8 010 35 015

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques