



Tête de perçage et de fraisage radiale

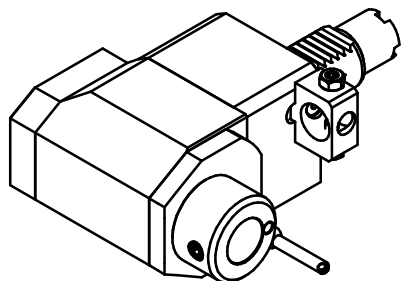


A technical drawing of a bolt and nut assembly. The bolt is shown in profile, with a hexagonal head on the left and a threaded shank extending to the right. A nut is threaded onto the end of the bolt shank. A horizontal blue line passes through the center of the bolt and nut, representing the axis of symmetry.




» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande


subject to technical changes

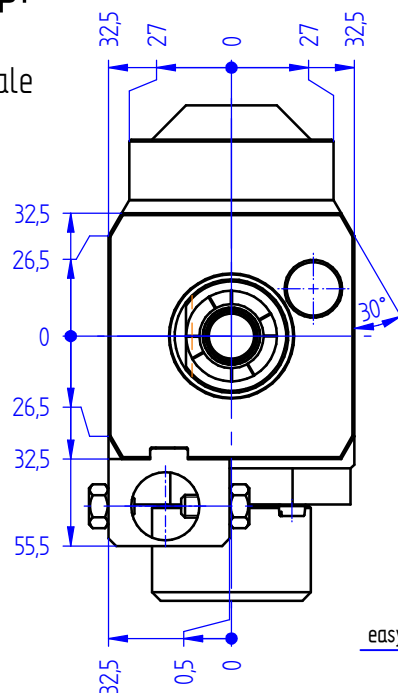

easy-quick HT4

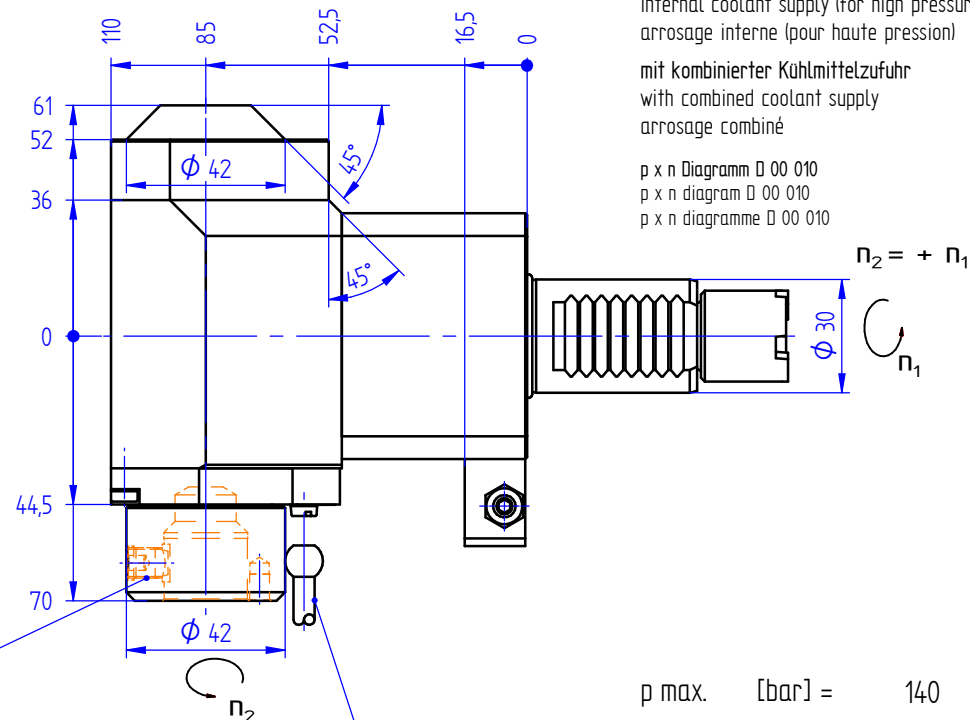

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

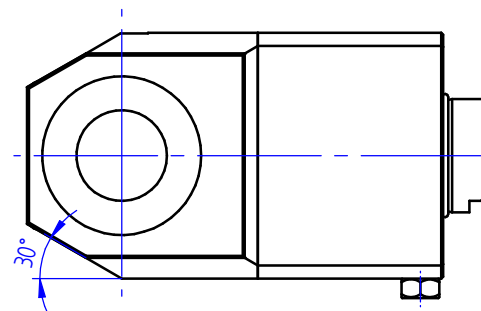
$$n_2 \text{ max. } [\text{min}^{-1}] = 6000$$

8 030 26 058

nous nous réservons toutes modifications techniques