



Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

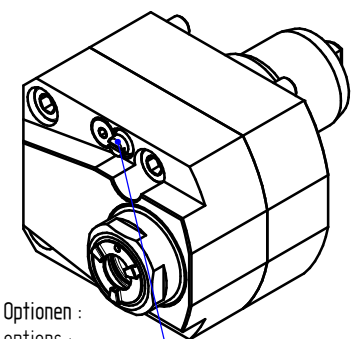

Optionen :
options :
options :



Dichtscheiben
sealings
joints

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté





Spannzangen
collets
Les pinces



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

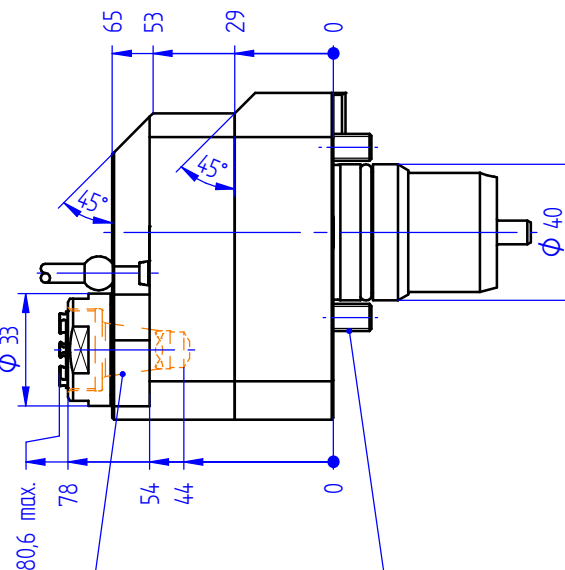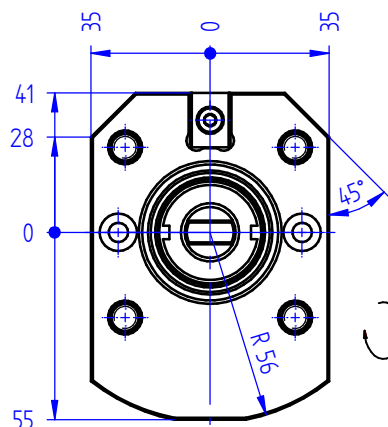

Befestigungsschrauben
fastening screws
vis de fixation


$$n_2 = -\frac{1}{i} \times n_1$$

i ≠ 1

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

p x n Diagramm D 00 010
p x n diagram D 00 010
p x n diagramme D 00 010

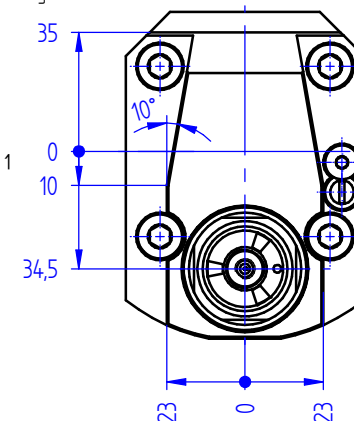

p max. [bar] = 140

i = 1:2

M₂ max. [Nm] = 12

n₂ max. [min⁻¹] = 12000

Bestell - Nr.
ref.no. / No.de cde.

8 019 44 077

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

subject to technical changes

nous nous réservons toutes modifications techniques