



Winkelkopf

Angle head



Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

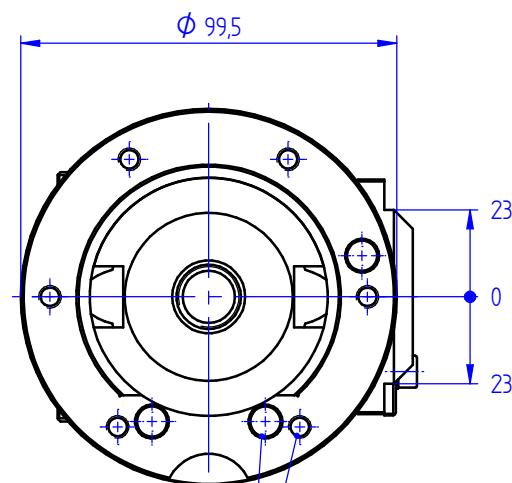

Anschluss für optionale
Drehmomentstütze und Abstützung
Connection for optional location device and
optional support device
raccordement pour segment d'arrêt
et support optionnel

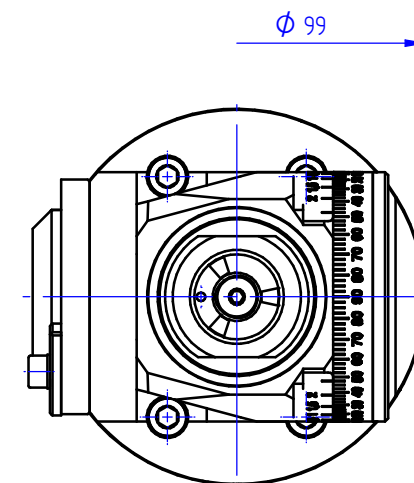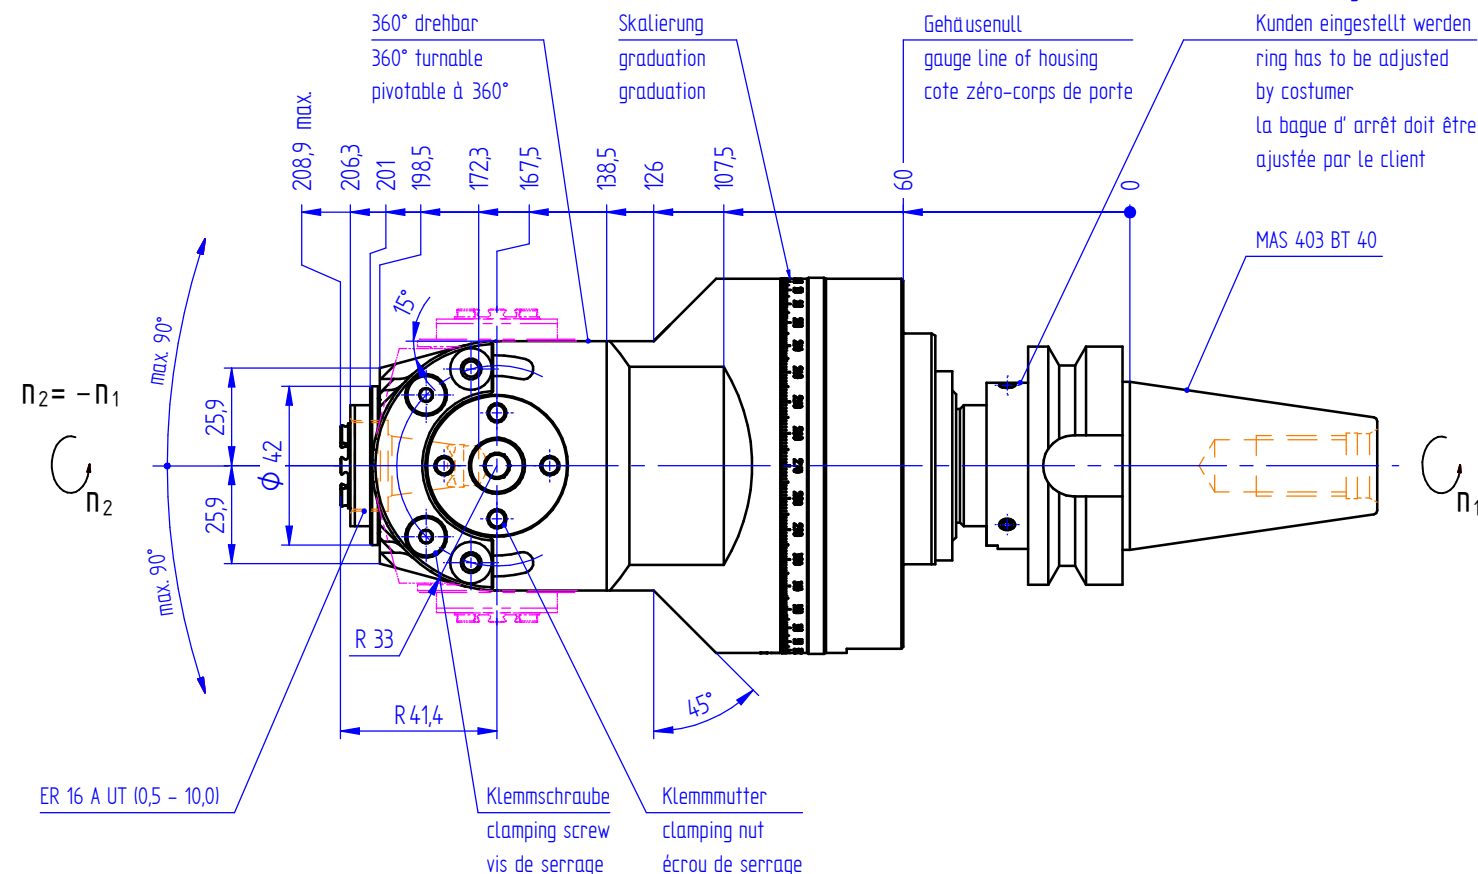

ohne Kühlmittel
without coolant
sans arrosage

± 90° Schwenkbar
± 90° swiveling
± 90° pivotant

Arreterring muß beim
Kunden eingestellt werden
ring has to be adjusted
by customer
la bague d'arrêt doit être
ajustée par le client

MAS 403 BT 40

$n_2 = -n_1$

max. 90°

max. 90°

R 33


R 41,4

45°


ER 16 A UT (0,5 - 10,0)

Klemmschraube
clamping screw
vis de serrage

Klemmmutter
clamping nut
écrou de serrage

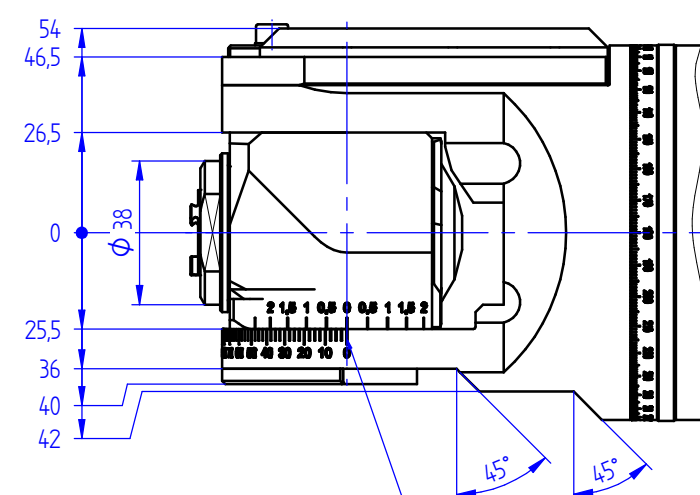

Skalierung
graduation
graduation

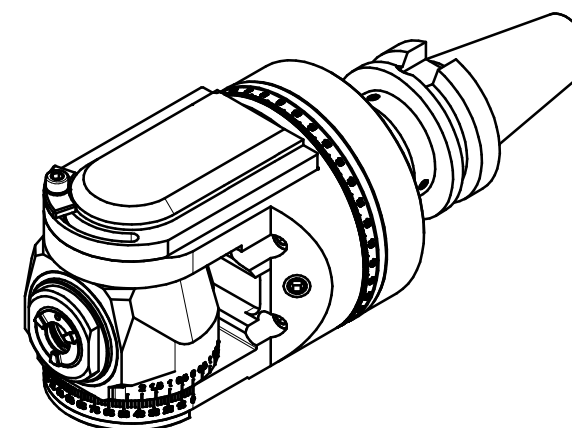

$i = 1:1$

$M_2 \text{ max. [Nm]} = 25$

$n_2 \text{ max. [min}^{-1}] = 8000$

Bestell - Nr.
ref.no. / No de cde.

7 040 44 008

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques