

Technical drawing of a mechanical assembly, showing three views: front view, top view, and side view.

Front View (Left):

- Overall width: 49.5
- Top flange width: 40
- Top flange thickness: 32.5
- Bottom flange width: 32.5

Top View (Right):

- Overall width: 79
- Top flange width: 54
- Top flange thickness: 18
- Top flange hole diameter: 0
- Top flange hole position: 45
- Top flange hole diameter: 55
- Top flange hole position: X
- Top flange hole diameter: $\phi 30$

Side View (Bottom):

- Overall height: 41.5
- Top flange height: 36
- Top flange hole position: 0
- Top flange hole diameter: 35
- Top flange hole position: 62.0 min
- Top flange hole position: 65.5 max
- Top flange hole diameter: $\phi 34$


Labels:

- einstellbarer WZ-Anschlag
- Fixierung

Einstecktiefe: 41,5

Einzelheit: X

Paßfeder
A 4 x 4 x 8

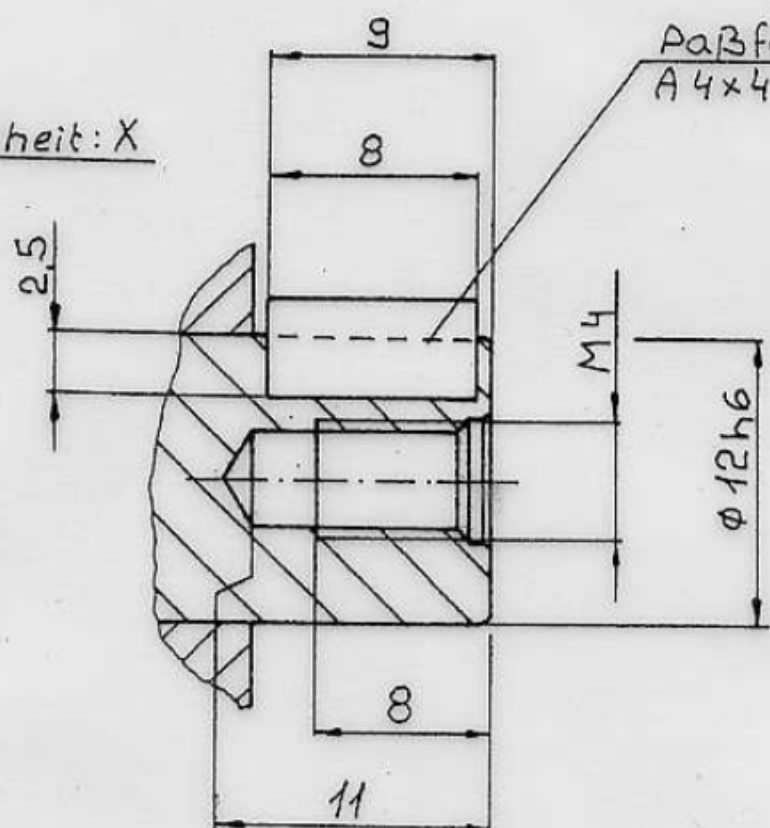

Winkel - Bohr - u. Fräskopf
ER 20
Bestell.-Nr. 8 030 24 053