

Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale




Darstellung symbolisch
symbolical drawing
schéma symbolique


bei externer Kühlmittelzufuhr Verschusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté



easy-quick HT5

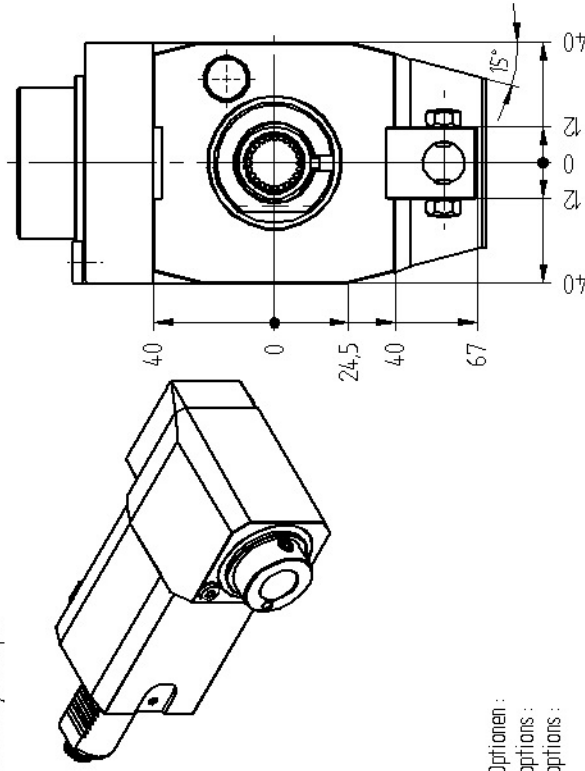

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick




Bedienchlüssel
wrench
clé

Technische Änderungen vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

subject to technical changes

$n_2 = -n_1$



p max. [bar] = 25

i = 1:1

M₂ max. [Nm] = 50

n₂ max. [min⁻¹] = 6000

Bestell - Nr.

ref.no. / No de cde.

8 030 47 039

180° umsetzbar
180° convertible
interchangeable de 180°

nous nous réservons toutes modifications techniques