

Winkel- Bohr- und Fräskopf


Radial drilling and milling head

Tête de perçage et de fraisage radiale




Darstellung symbolisch
symbolical drawing
schéma symbolique

bei externer Kühlmittelzufuhr
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

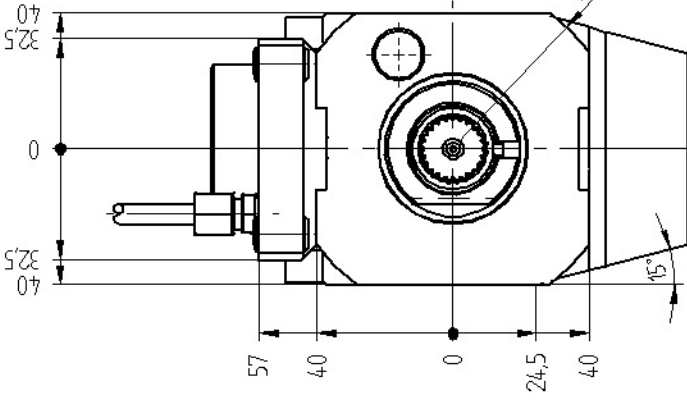


easy-quick HT5

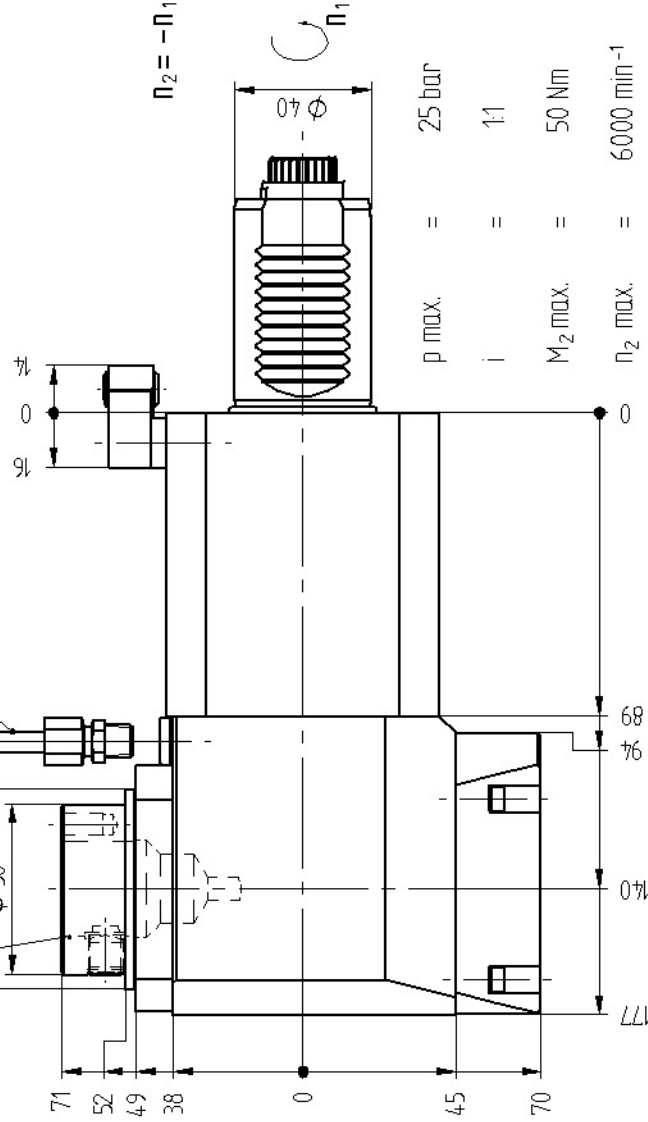

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienchlüssel
wrench
clé

Technische Änderungen vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné
p x n Diagramm 0 00 000
p x n diagram 0 00 000
p x n diagramme 0 00 000
Trockenlauf bedingt möglich
use without coolant partly possible
l'utilisation sans arrosage est partiellement possible

p max. = 25 bar
i = 1:1
M₂ max. = 50 Nm
n₂ max. = 6000 min⁻¹

Bestell - Nr.
ref.no. / No.de cde.

8 030 47 046

nous nous réservons toutes modifications techniques