




Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

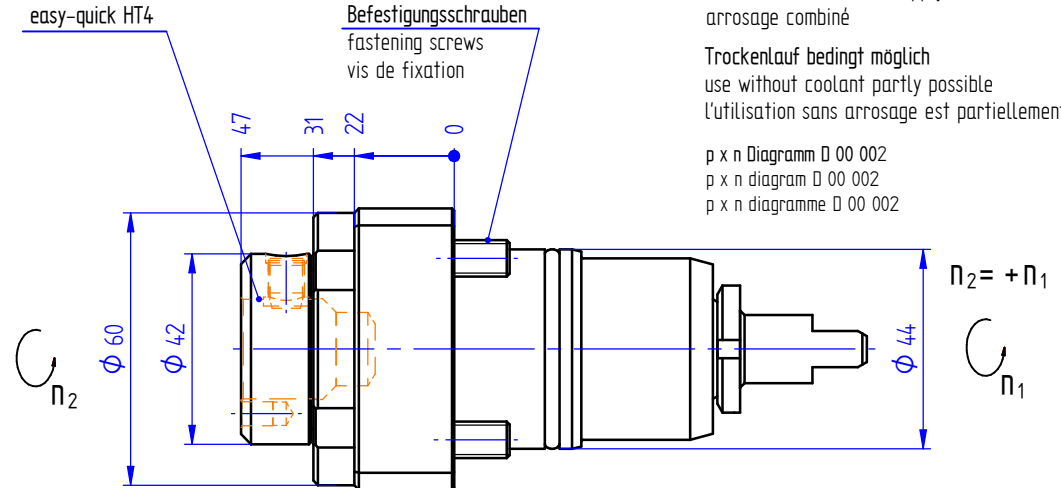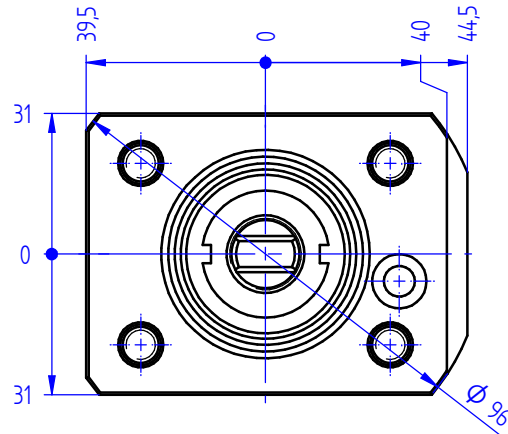

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

Trockenlauf bedingt möglich
use without coolant partly possible
l'utilisation sans arrosage est partiellement possible

p x n Diagramm D 00 002
p x n diagram D 00 002
p x n diagramme D 00 002


Optionen :
options :
options :




Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienschlüssel
wrench
clé

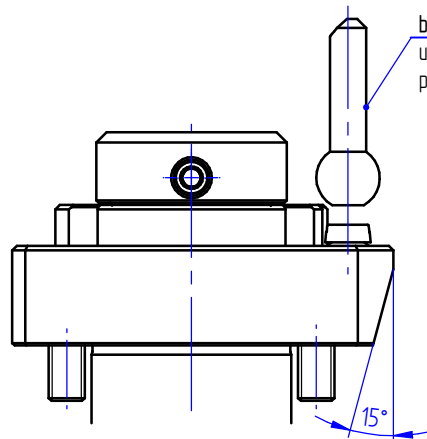

bei externer Kühlmittelzufuhr Gewindestift durch Kühlrohr ersetzen
using external coolant supply, please substitute screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

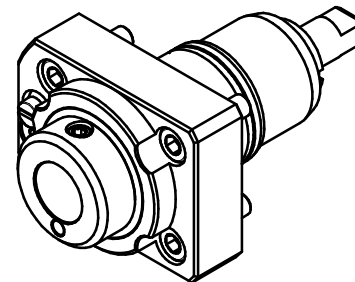

p max. [bar] = 25
i = 1:1
M₂ max. [Nm] = 16
n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 010 46 149 [

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques