


Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale






Darstellung symbolisch
symbolical drawing
schéma symbolique

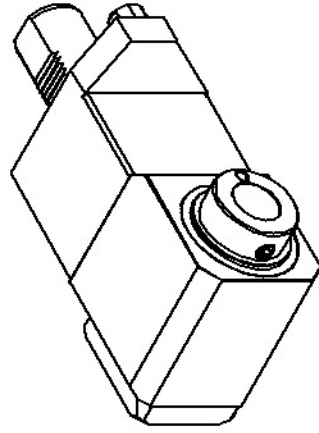

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté




easy-quick HT5

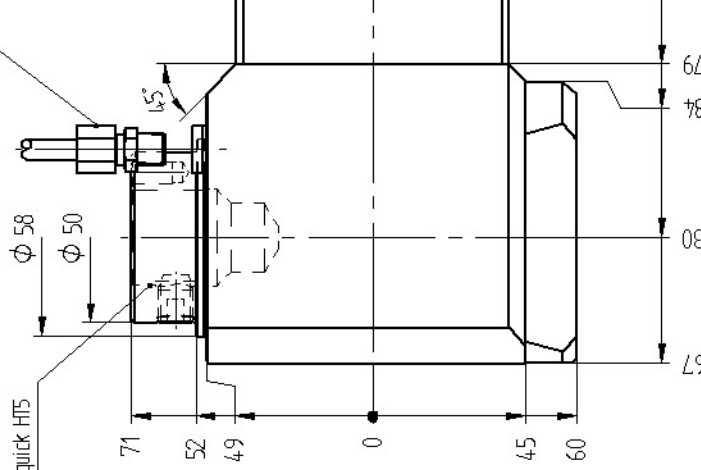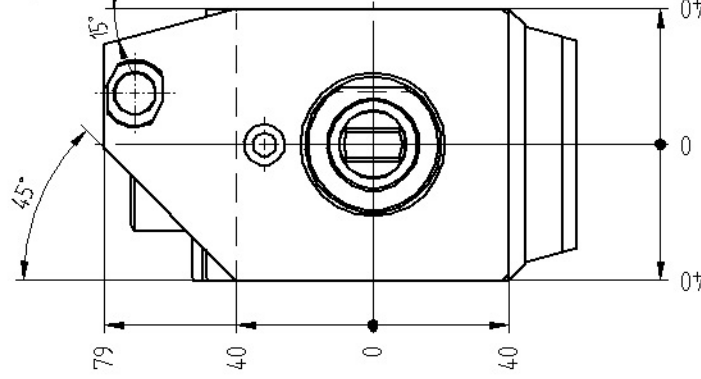


$n_2 = -n_1$

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienchlüssel
wrench
clé

Technische Änderung vorbehalten

p max. [bar] = 140
i = 1:1
M₂ max. [Nm] = 50
n₂ max. [min⁻¹] = 6000

Bestell - Nr.

ref.no. / No de cde.

8 030 47 063

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

subject to technical changes

nous nous réservons toutes modifications techniques