



Winkelkopf

Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

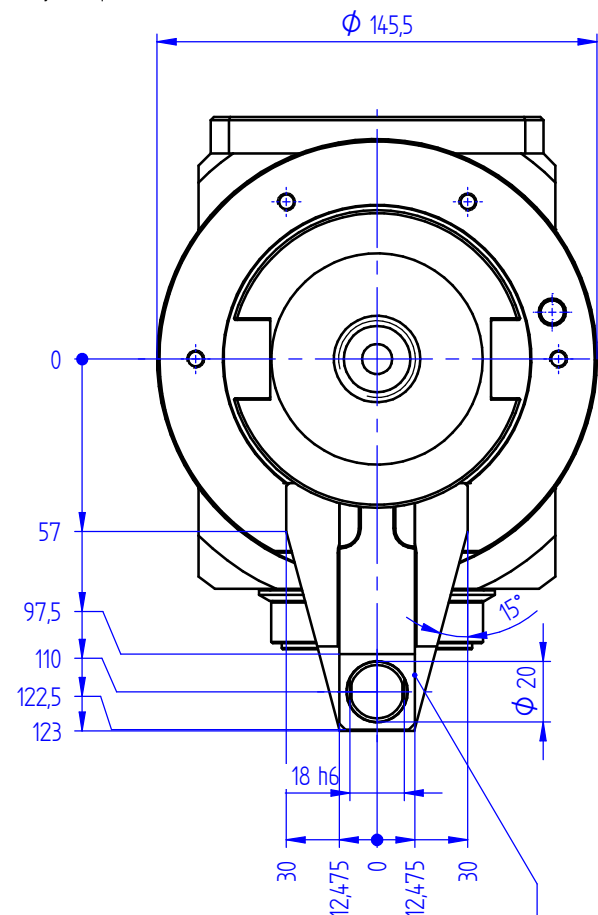

Lage der Drehmomentstütze kann zu den Nuten der Welle eingestellt werden
position of the location device can be adjusted to the slots at the taper
la position du segment d'arrêt peut être ajustée à la rainure du cône

Winkelkopf 7 030 65 017
angle head 7 030 65 017
tête angulaire 7 030 65 017

360° drehbar
360° turnable
pivotable à 360°


Skalierung
graduation
graduation

Gehäusenull
gauge line of housing
cote zéro-corps de porte

Arreterring muss beim Kunden eingestellt werden
ring has to be adjusted by customer
la bague d'arrêt doit être ajustée par le client

ANSI B 5.50/ CAT 50 inch



$n_2 = -n_1$

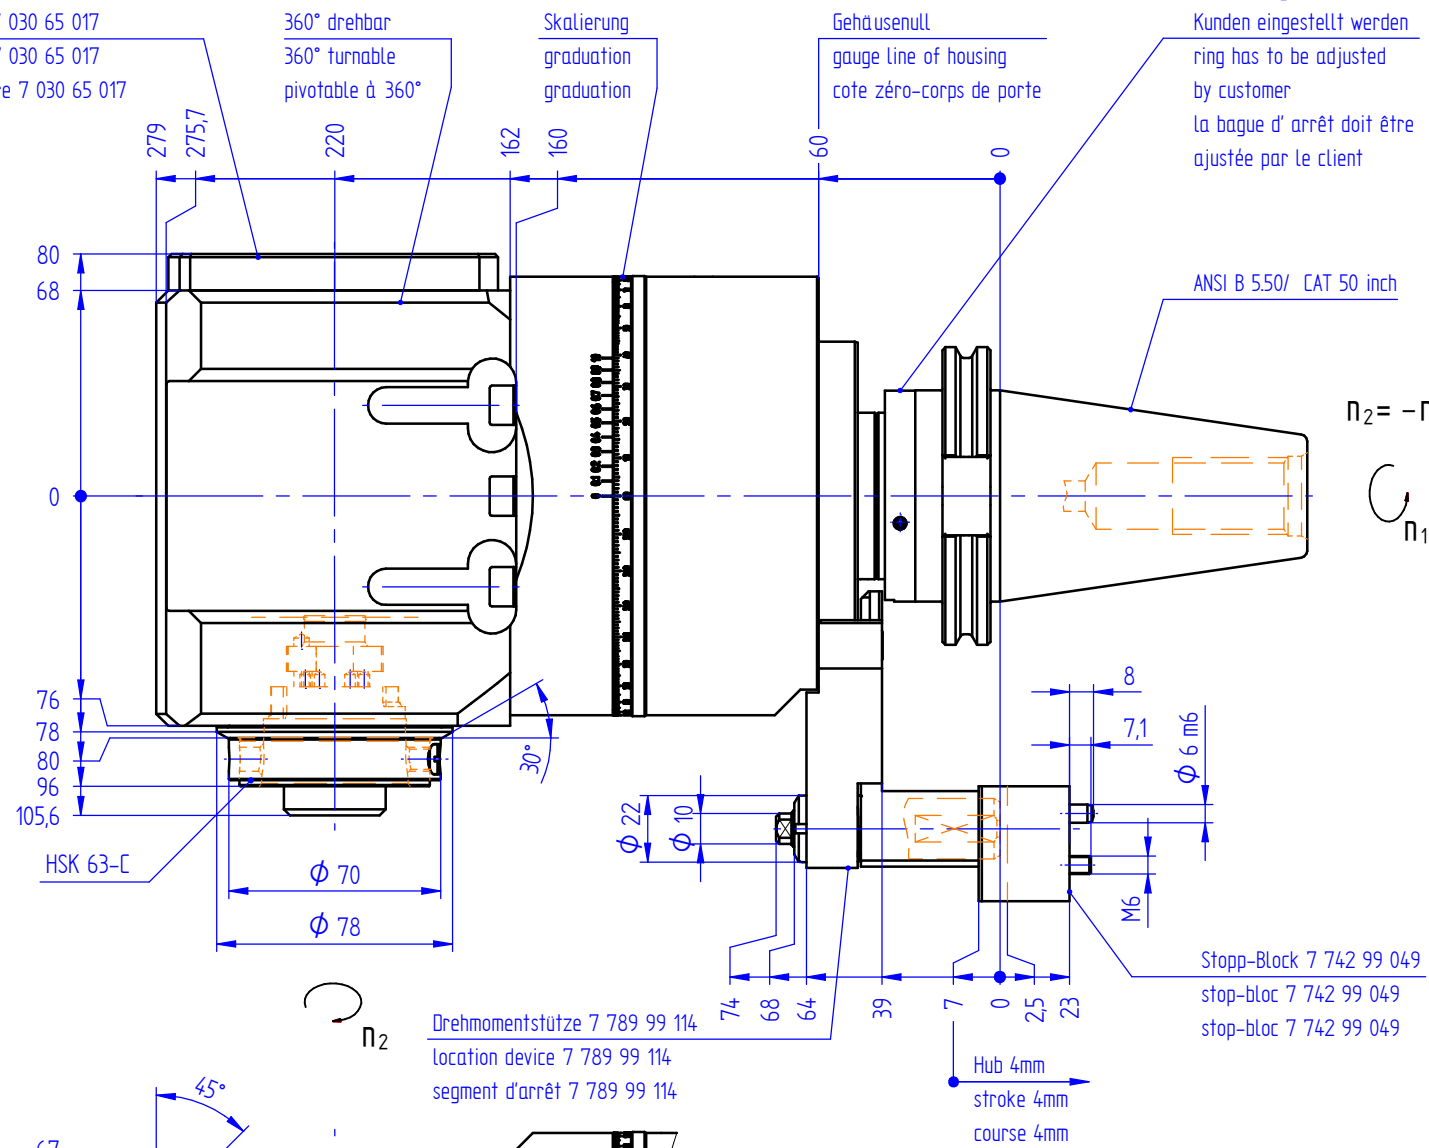

Drehmomentstütze 7 789 99 114
location device 7 789 99 114
segment d'arrêt 7 789 99 114

Stopp-Block 7 742 99 049
stop-bloc 7 742 99 049
stop-bloc 7 742 99 049


Hub 4mm
stroke 4mm
course 4mm

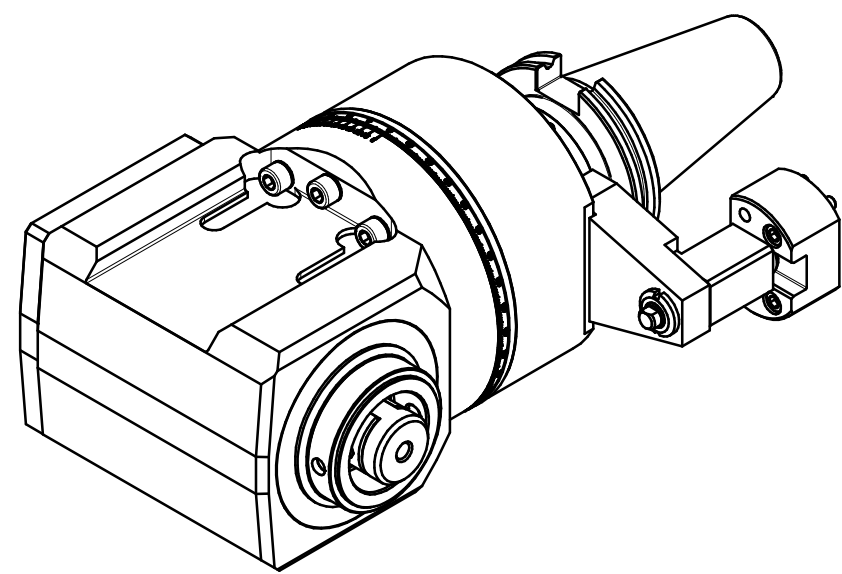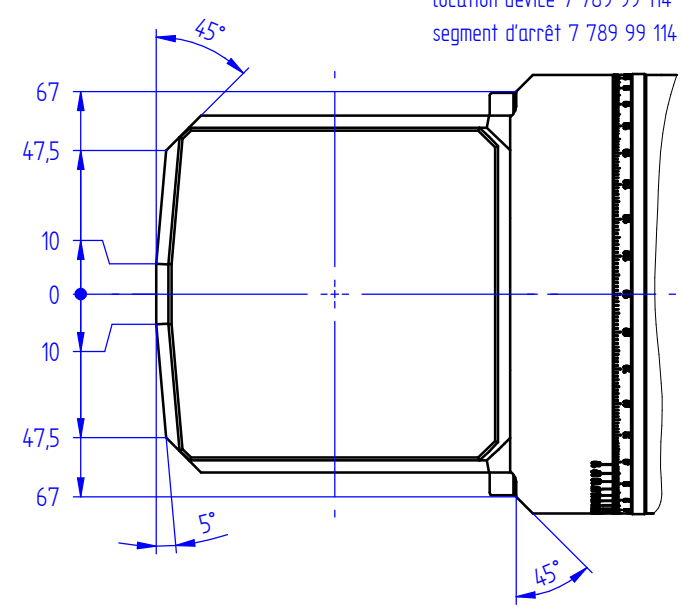

Größe 5
size 5
taille 5

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)


p x n Diagramm D 00 013
p x n diagram D 00 013
p x n diagramme D 00 013

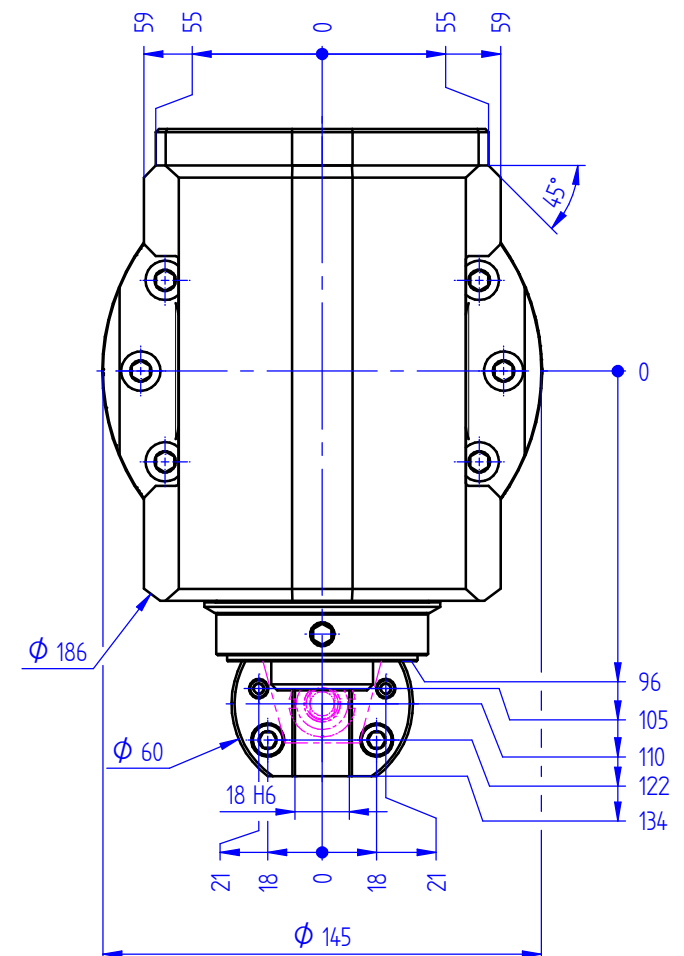

p max. [bar] = 70
i = 1:1
M₂ max. [Nm] = 120
n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.
7 030 65 015

Optionen :
options :
options :



Bedienschlüssel
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques