



Winkelkopf

Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

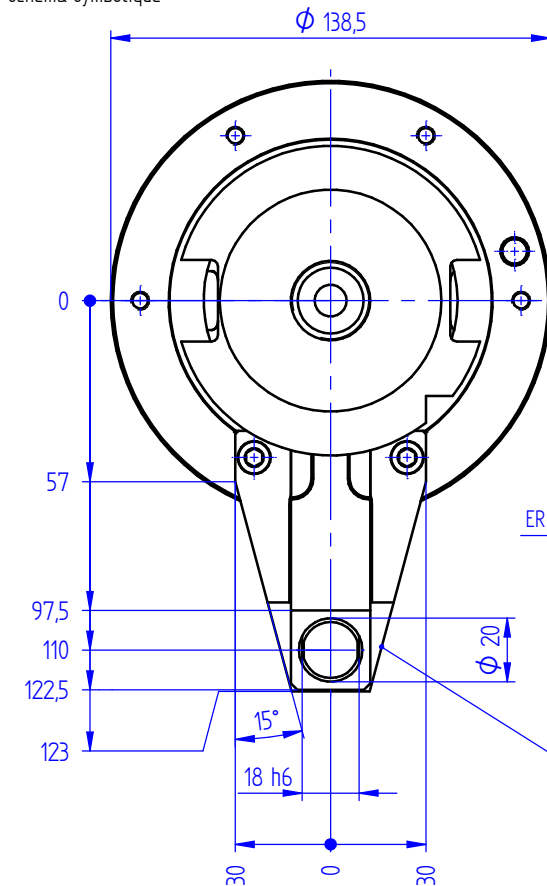

Winkelkopf 7 033 66 055
angle head 7 033 66 055
tête angulaire 7 033 66 055


360° drehbar
360° turnable
pivotable à 360°

Skalierung
graduation
graduation

Gehäusenull
gauge line of housing
cote zéro-corps de porte

Arreterring muss beim
Kunden eingestellt werden
ring has to be adjusted
by customer
la bague d'arrêt doit être
ajustée par le client

DIN 69871 A - SK 50

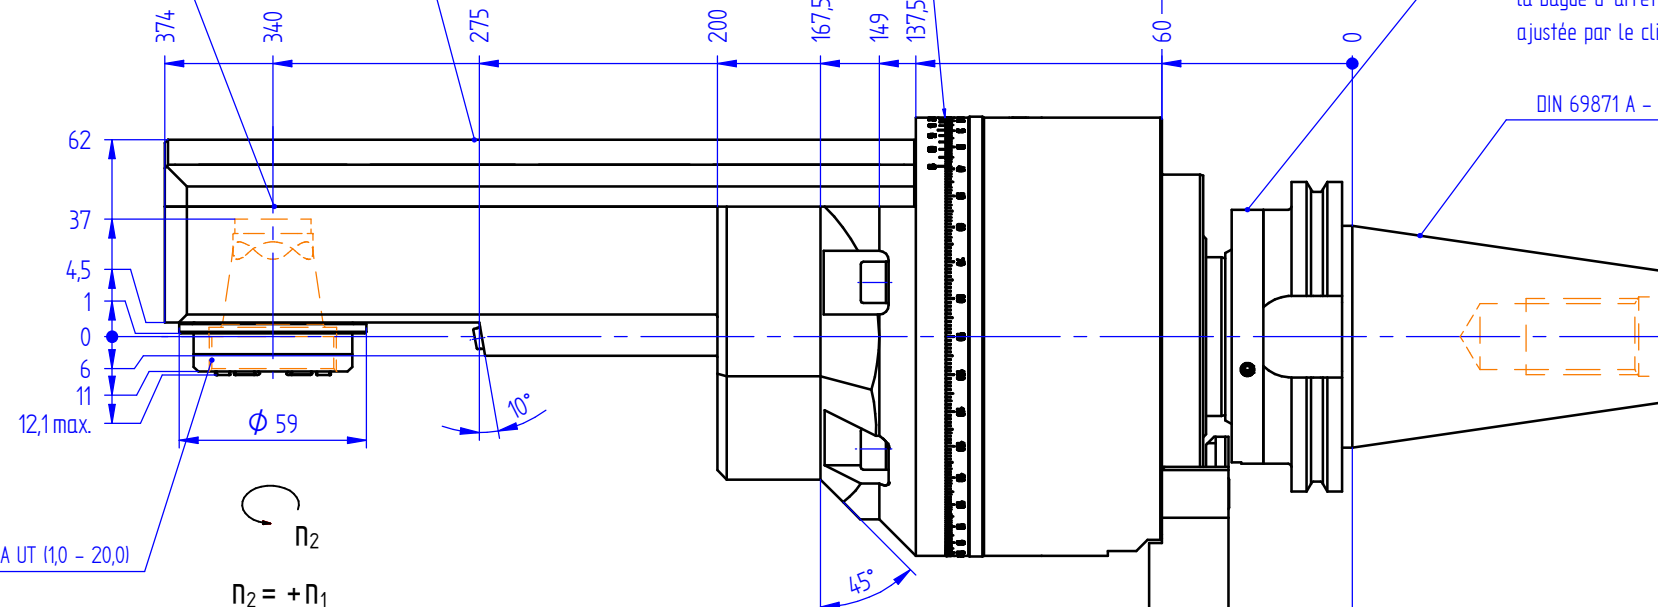


ER 32 A UT (1,0 - 20,0)

$n_2 = +n_1$

Lage der Drehmomentstütze kann zu den
Nuten der Welle eingestellt werden
Position of the location device can be
adjusted to the slots at the taper
La position du segment d'arrêt peut être
ajustée à la rainure du cône

Drehmomentstütze 7 789 99 114
location device 7 789 99 114
segment d'arrêt 7 789 99 114

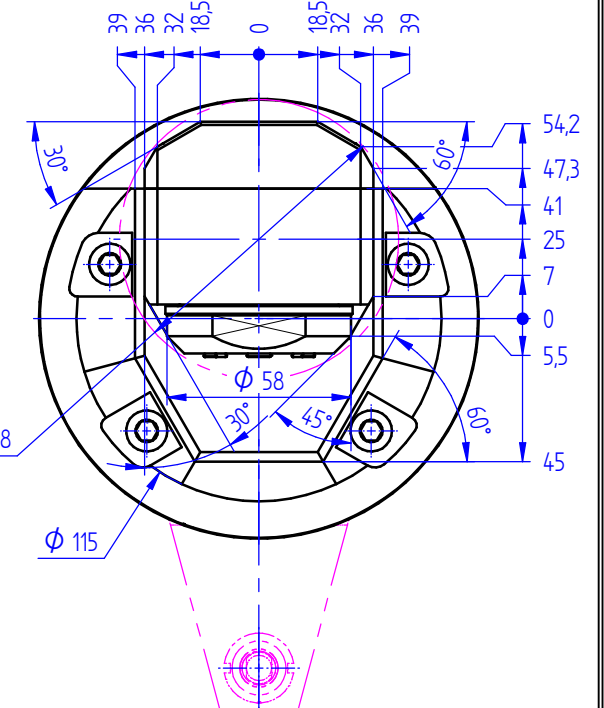

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage




Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

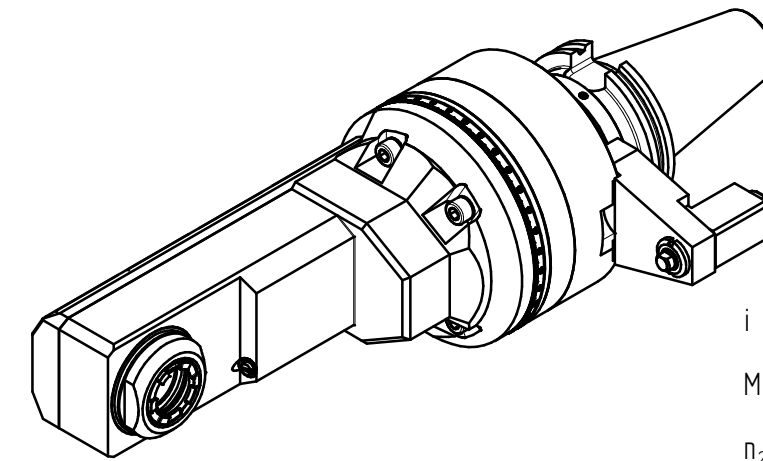

$i = 1:1$
 $M_2 \text{ max. [Nm]} = 50$
 $n_2 \text{ max. [min}^{-1}] = 8000$

Bestell - Nr.
ref.no. / No.de cde.

7 033 66 056

nous nous réservons toutes modifications techniques