

Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale



Darstellung symbolisch
symbolical drawing
schéma symbolique



Ringschraube abnehmbar
eyebolt removable
anneau démontable

360° drehbar
360° turnable
pivotable à 360°

Anstifterring muß beim
Kunden eingestellt werden
ring has to be adjusted
by customer
la bague d'arrêt doit être
ajustée par le client

Kegelnulllinie
gauge line of taper
ligne zéro du cône

vom Kunden abzustimmen
must be adjusted by customer
à ajuster par le client

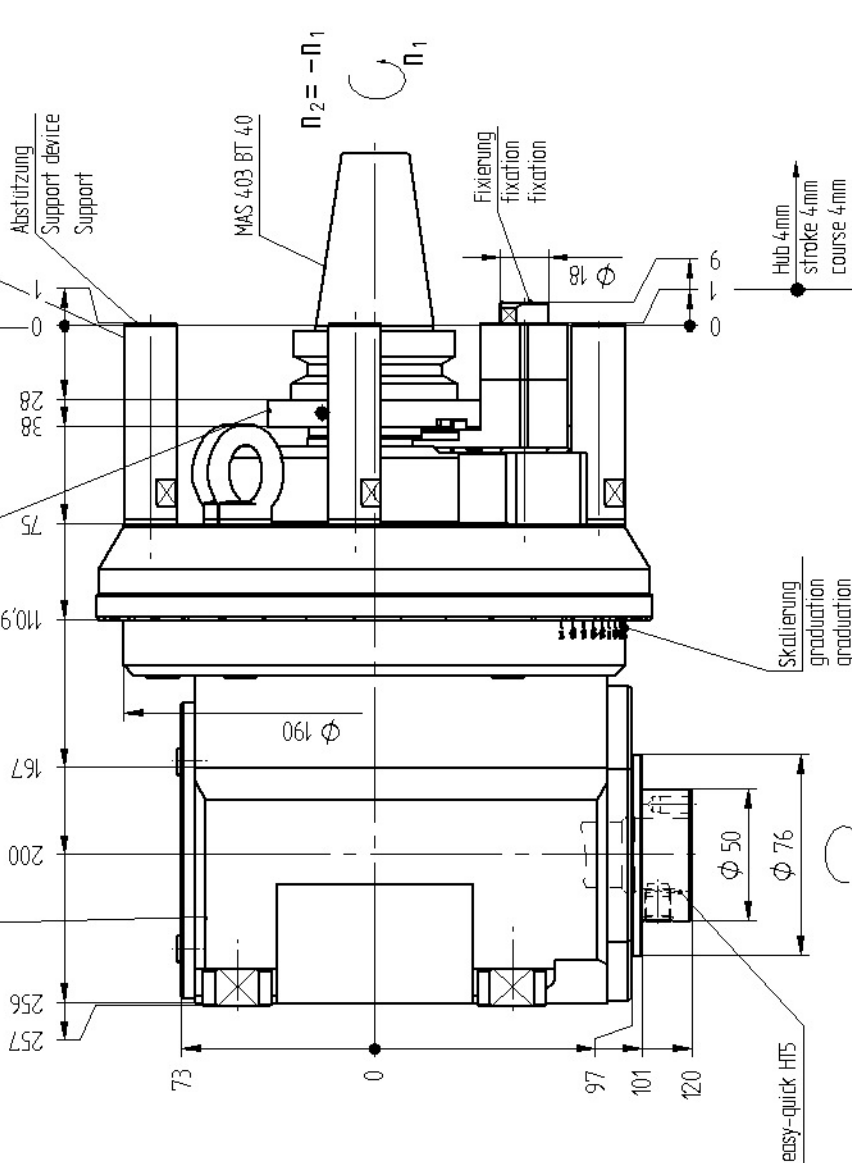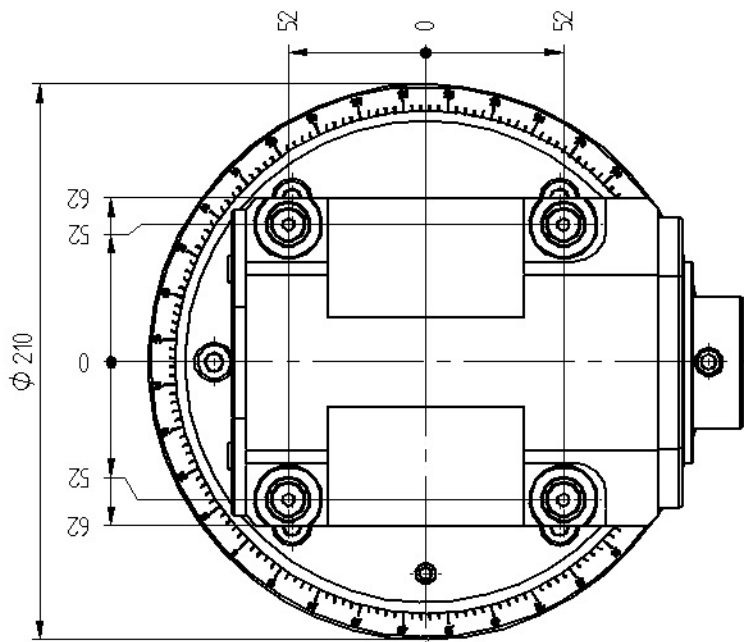


Fixierflanschnull
gauge line of fixing flange
ligne zéro du flasque

Hub 4 mm
stroke 4 mm
course 4 mm

Skalierung
graduation
graduation

easy-quick HT5

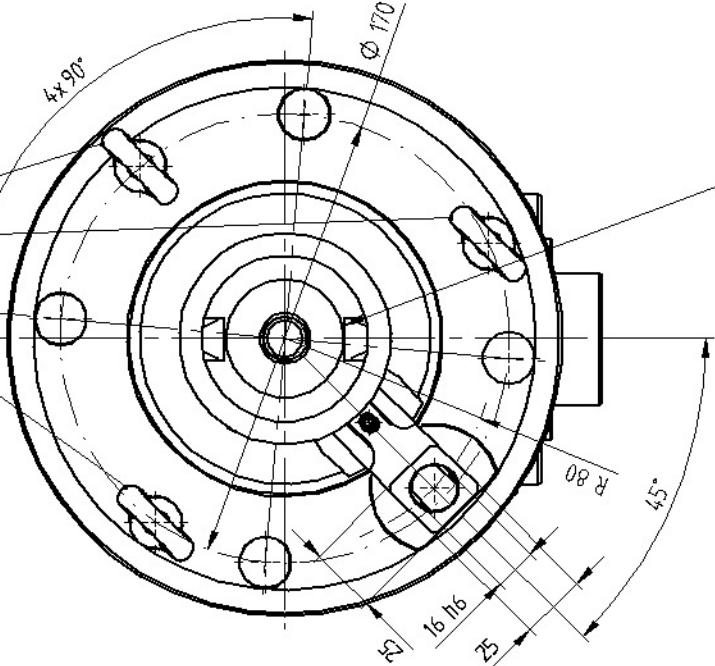


Lage der Adapternuten vom Kunden einzustellen
the position of the slots has to be adjusted by customer
la position de rainures doit être adaptée par le client

Optionen :
options :
options :





Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienhandschulter
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

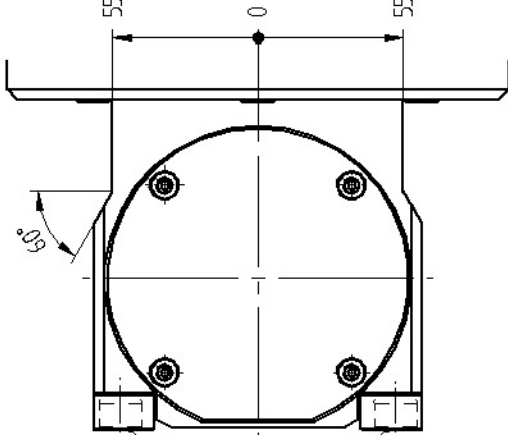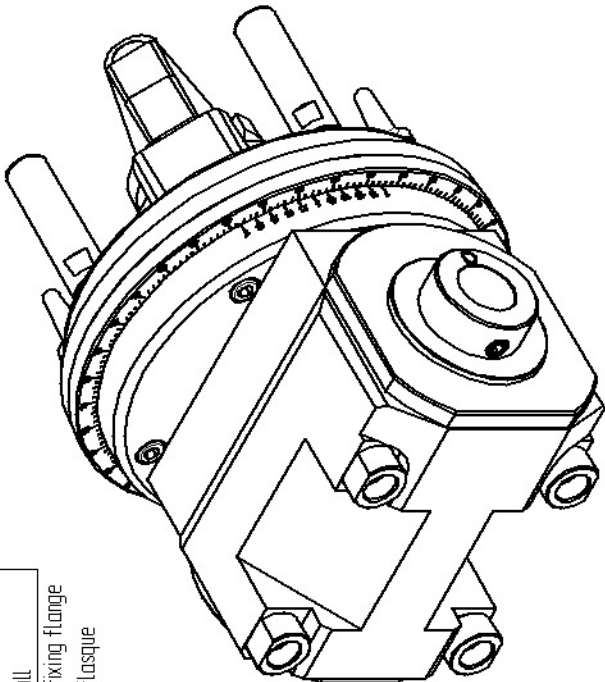

Anschluss für Pick-Up-Station
connection for pick-up-station
connexion pour station pick-up

i = 11
M₂ max. = 100 Nm
n₂ max. = 4000 min⁻¹

Bestell - Nr.
ref.no. / No.de cde.

7 039 47 004

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques