

Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale







Darstellung symbolisch
symbolical drawing
schéma symbolique


bei externer Kühlmittelzufuhr
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté



Weldon / Whistle - Notch 12

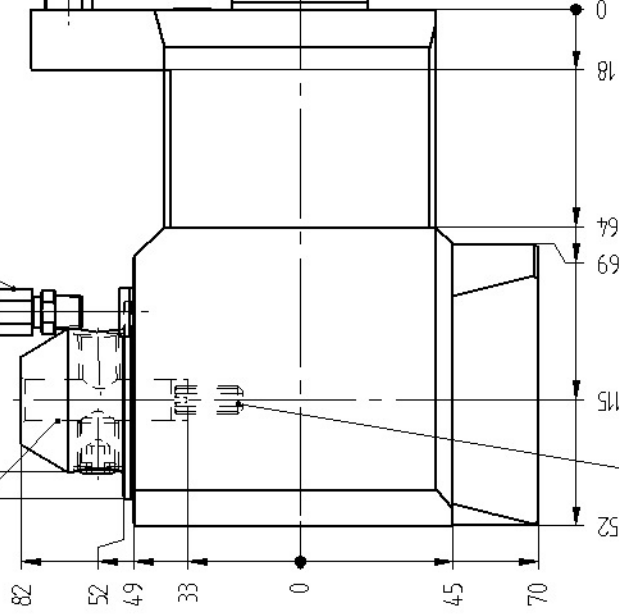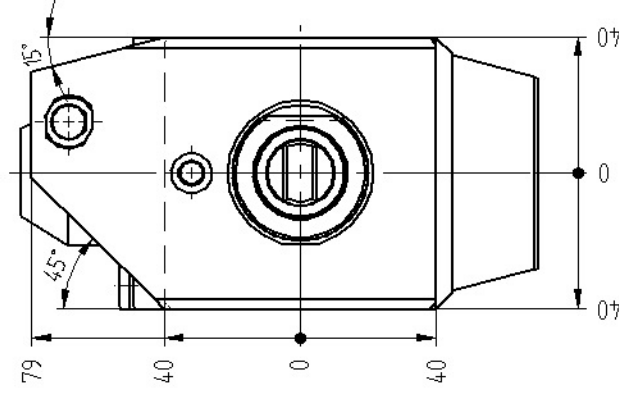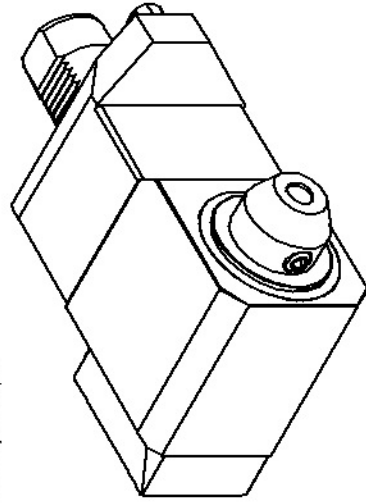

$n_2 = -n_1$



p max.	=	25 bar
i	=	1:1
M ₂ max.	=	50 Nm
n ₂ max.	=	6000 min ⁻¹

Optionen :
options :
options :



Bedienschlüssel
wrench
le clé

einstellbarer Werkzeugschlag
Toolstop adjustable
butée réglable

Bestell - Nr.
ref.no. / No de cde.

8 030 44 010

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques