


Winkelkopf

Angle head


Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

ohne Kühlmittel
without coolant
sans arrosage

± 90° Schwenkbar
± 90° swiveling
± 90° pivotant

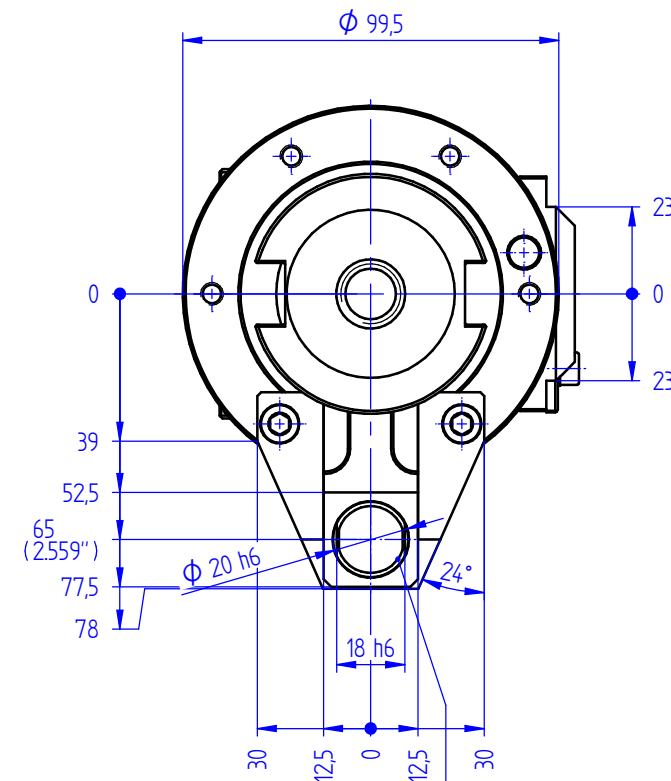

Lage der Drehmomentstütze kann zu den
Nuten der Welle eingestellt werden
Position of the location device can be
adjusted to the slots at the taper
La position du segment d'arrêt peut être
ajustée à la rainure du cône





Winkelkopf 7 040 45 015
angle head 7 040 45 015
tête angulaire 7 040 45 015

360° drehbar
360° turnable
pivotable à 360°

Skalierung
graduation
graduation

Gehäusenull
gauge line of housing
cote zéro-corps de porte

Arretiererring muß beim
Kunden eingestellt werden
ring has to be adjusted
by customer
la bague d'arrêt doit être
ajustée par le client

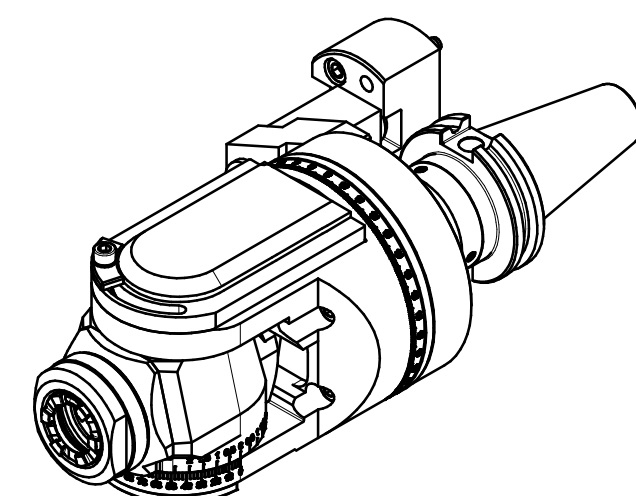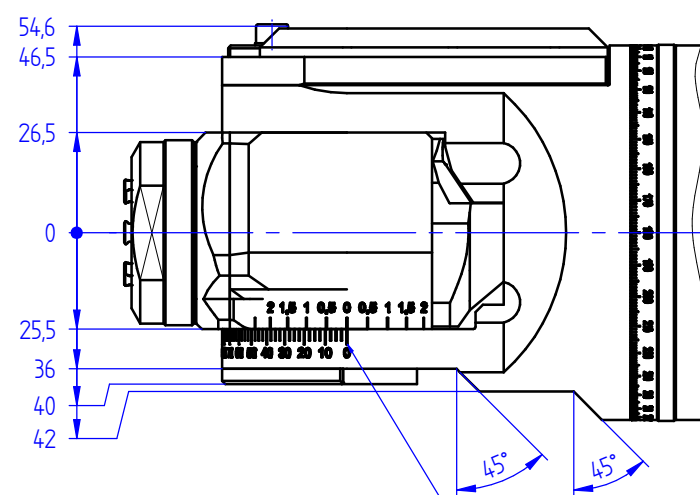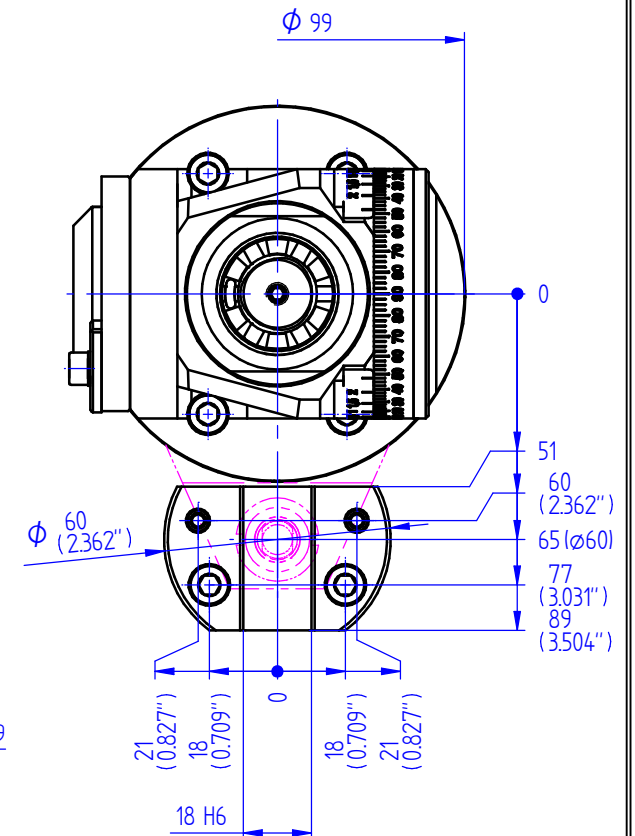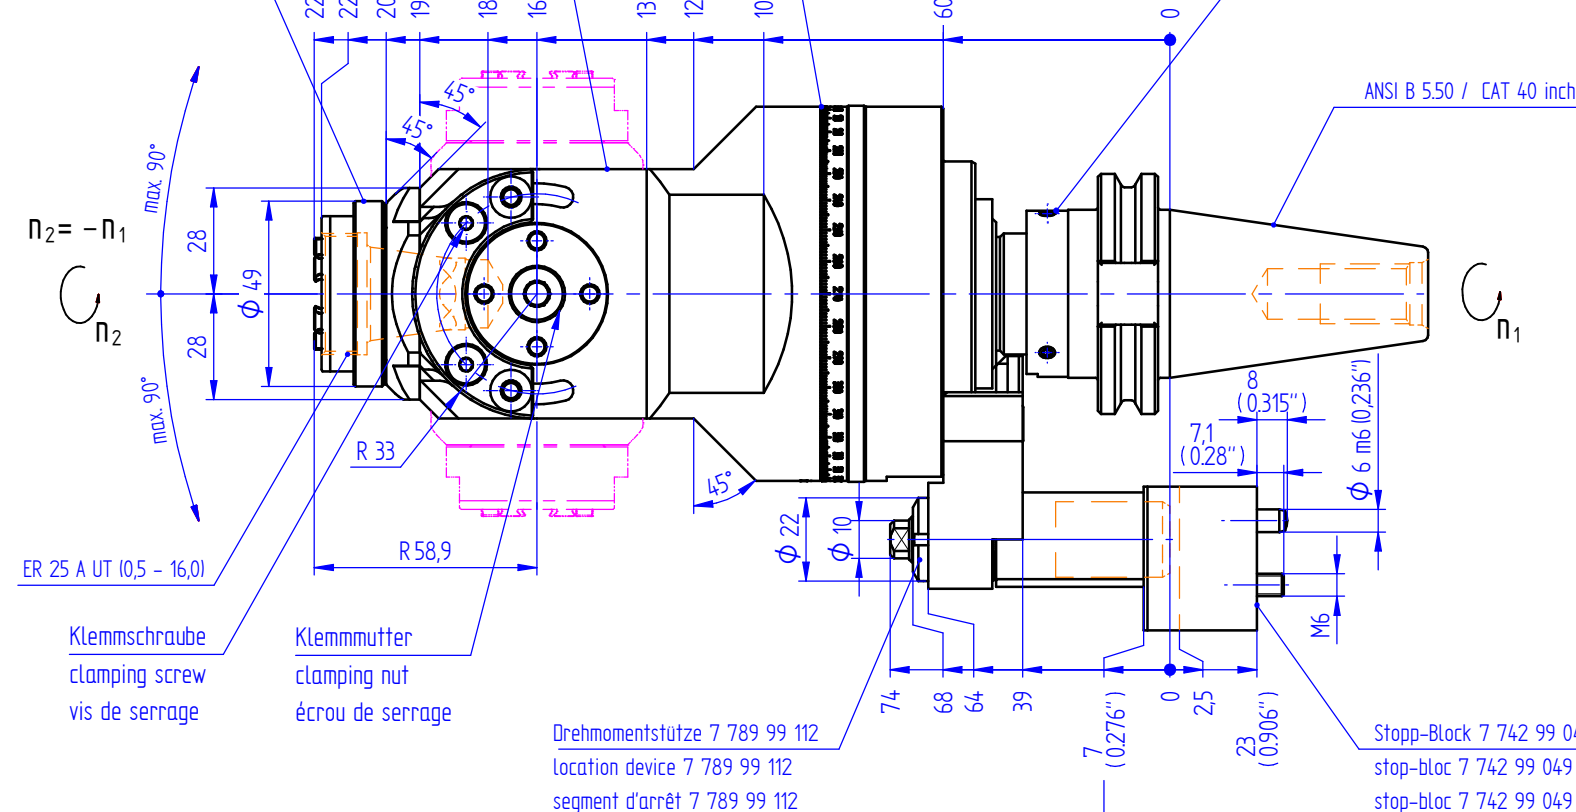

i = 1:1
M₂ max. [Nm] = 25
n₂ max. [min⁻¹] = 8000

Bestell - Nr.
ref.no. / Node cde.

7 040 45 015

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques