


Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale






Darstellung symbolisch
symbolical drawing
schéma symbolique

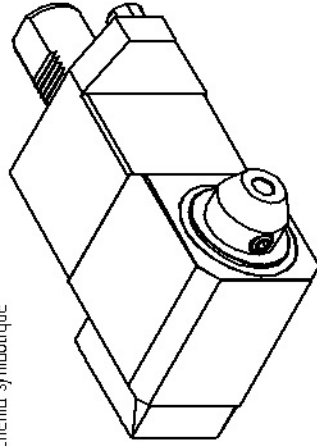

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté




Weldon / whistle - Natch 12

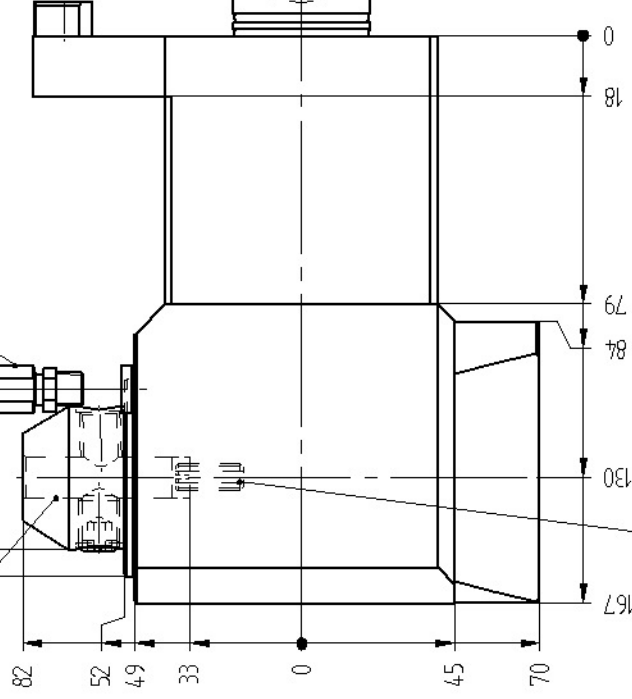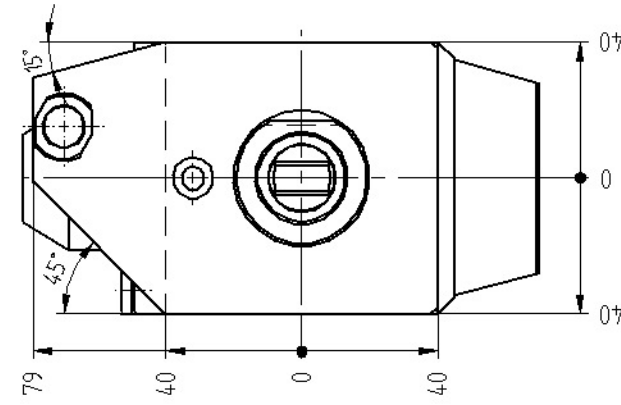

p max.	=	25 bar
i	=	1 : 1
M ₂ max.	=	50 Nm
n ₂ max.	=	6000 min ⁻¹

Optionen :
options :
options :



Bedienschlüssel
wrench
le clé

Bestell - Nr.

ref.no. / No.de cde.

8 030 44 025

einstellbarer Werkzeugschlag
toolstop adjustable
butfée réglable

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques