




Schwenkkopf

Milling and drilling head, swivelling

Tête pivotante





Darstellung symbolisch
symbolical drawing
schéma symbolique

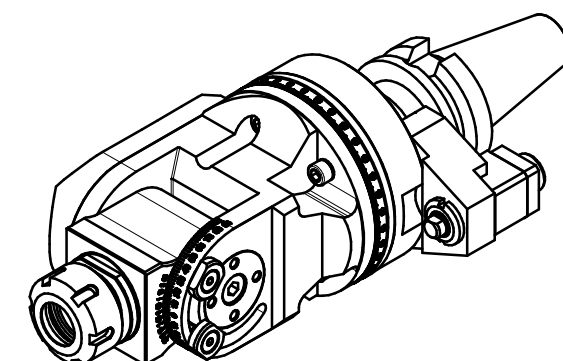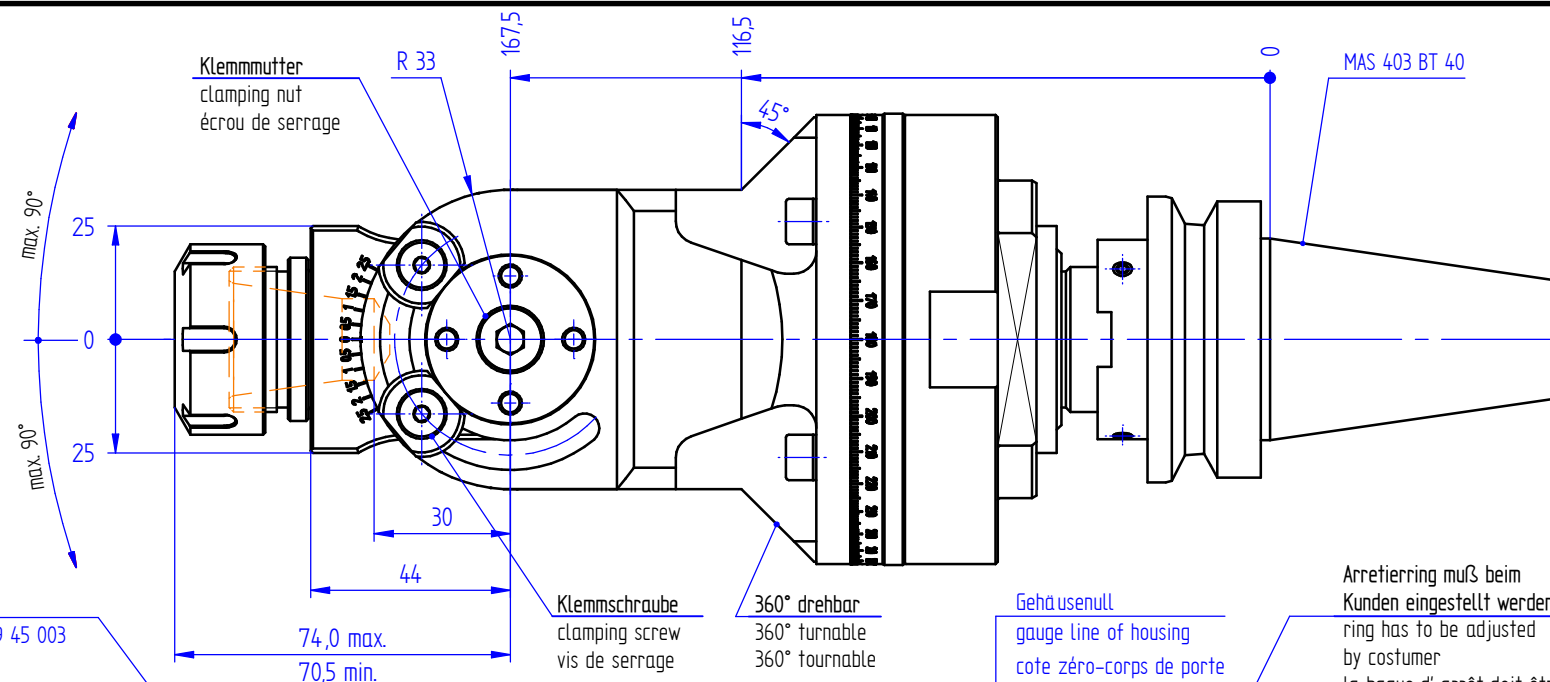


ohne Kühlmittel
without coolant
sans arrosage

± 90° Schwenkbar
± 90° swiveling
± 90° pivotant

Schwenkkopf 7 049 45 003
Milling and drilling head, swivelling 7 049 45 003
Tête pivotante 7 049 45 003

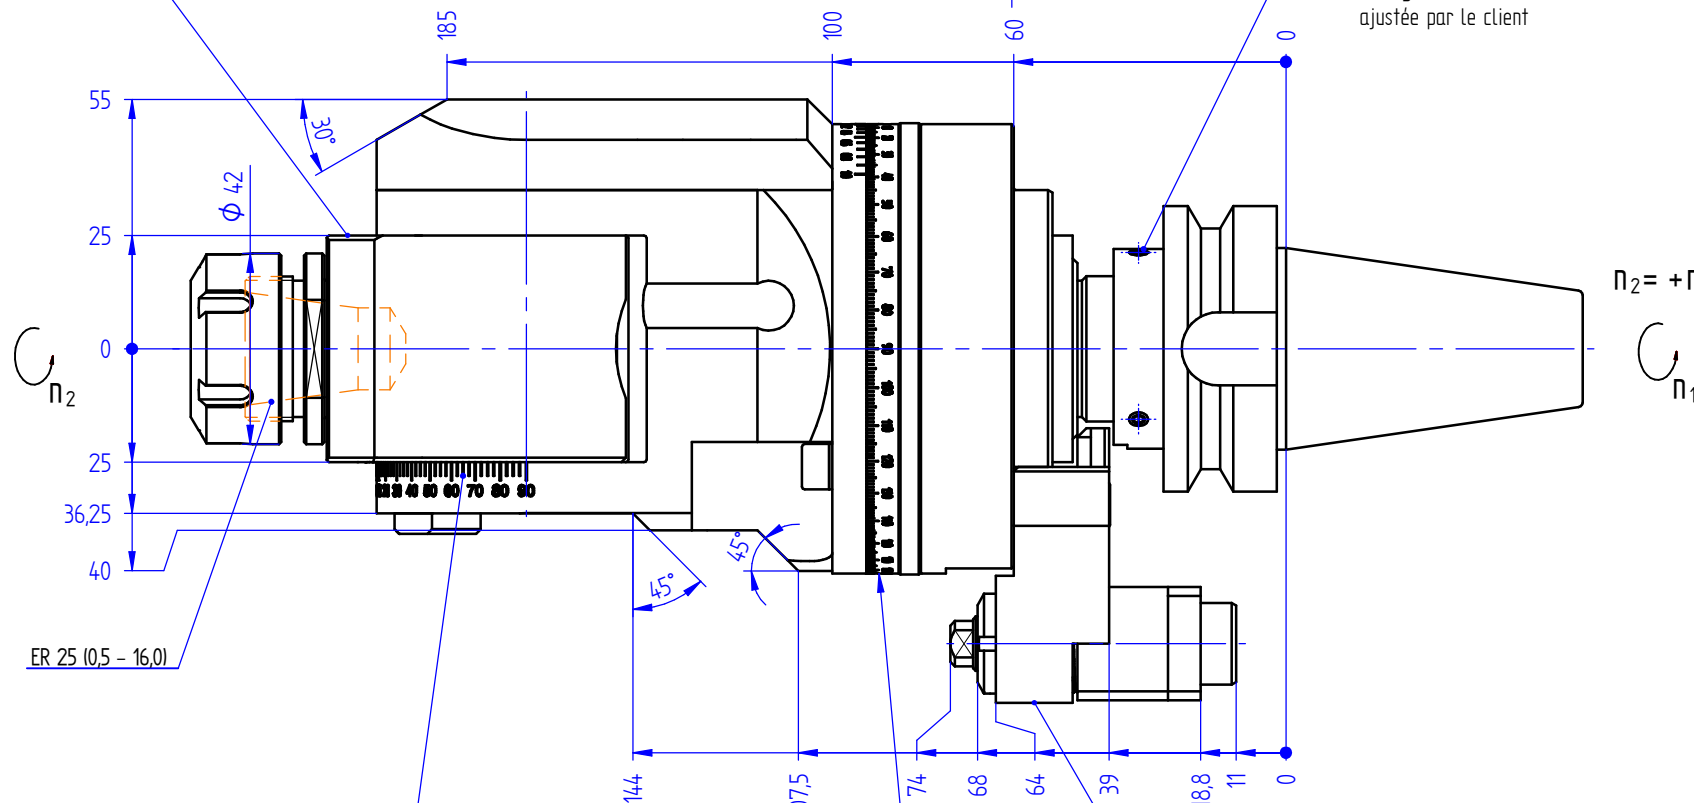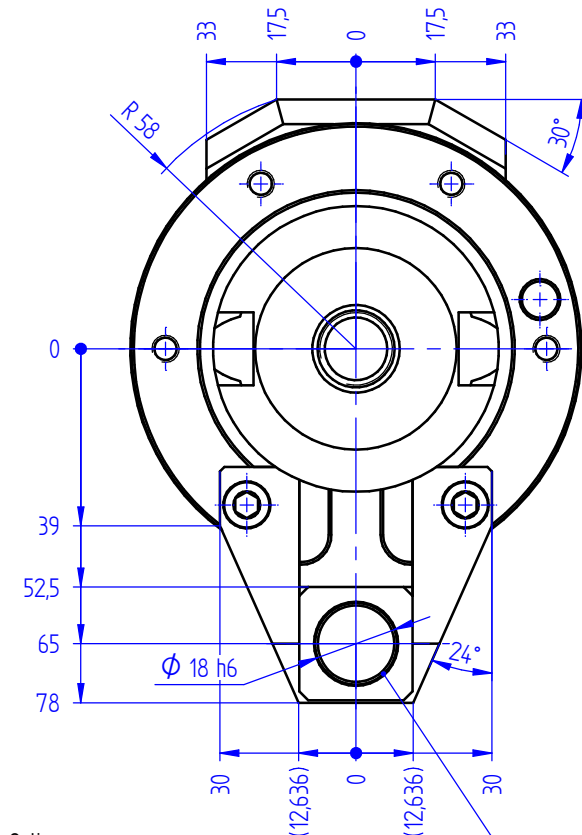

$n_2 = +n_1$

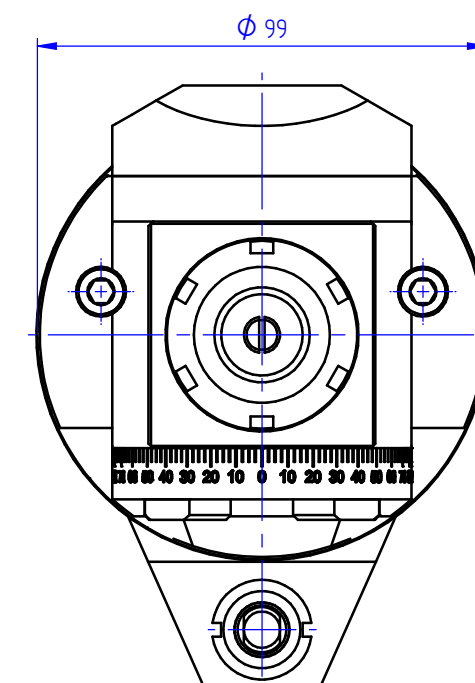

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Bedienschlüsselsatz
set of wrench
jeu de clés

Lage der Drehmomentstütze kann zu den Nuten der Welle eingestellt werden
Position of the location device can be adjusted to the slots at the taper
La position du segment d'arrêt peut être ajustée à la rainure du cône

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

$i = 1:1$

$M_2 \text{ max. [Nm]} = 25$

$n_2 \text{ max. [min}^{-1}] = 8000$

Bestell - Nr.
ref.no. / Node cde.

7 049 45 017

nous nous réservons toutes modifications techniques