



Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale




Darstellung symbolisch
symbolical drawing
schéma symbolique

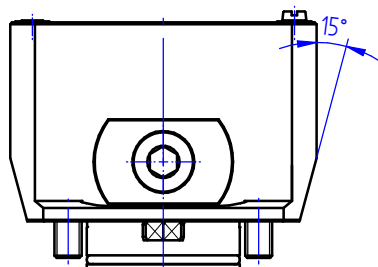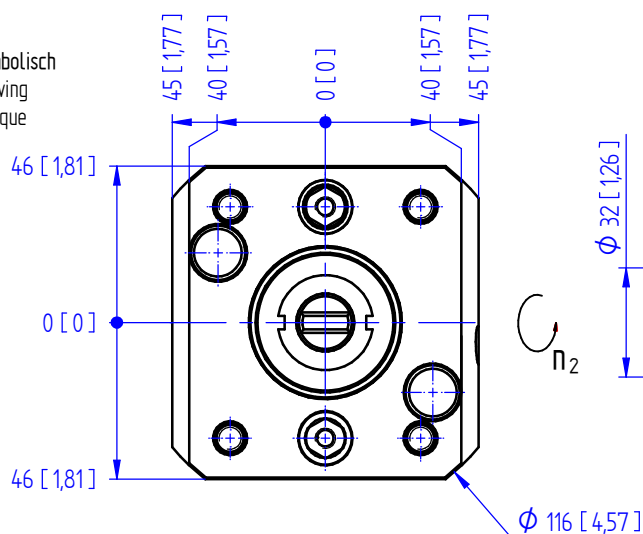

Schnittstellennull
gauge line of interface
cote zéro de l'interface



Befestigungsschrauben
fastening screws
vis de fixation

Gewindestift zum Abdrücken
thread screw to push away
aide au démontage

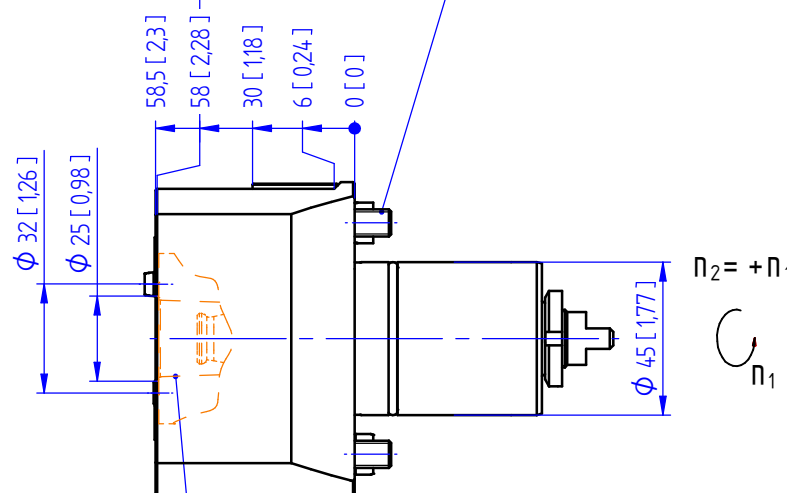

heimatec Capto™ C 3

Bedienung
handling clamping
orifice pour serrage

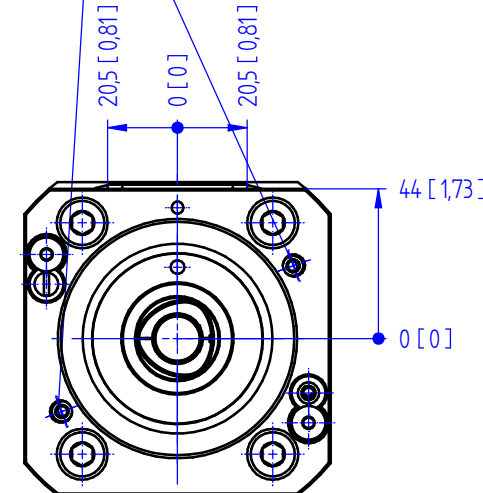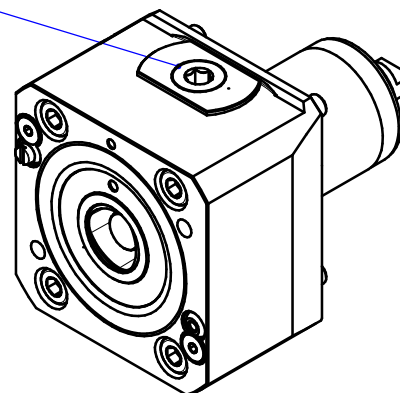

i = 1:1
M₂ max. [Nm] = 32
n₂ max. [min⁻¹] = 8000

Bestell - Nr.
ref.no. / No.de cde.

8 010 45 183

Optionen :
options :
options :



Bedienschlüssel
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

subject to technical changes

nous nous réservons toutes modifications techniques