



Winkelkopf

Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

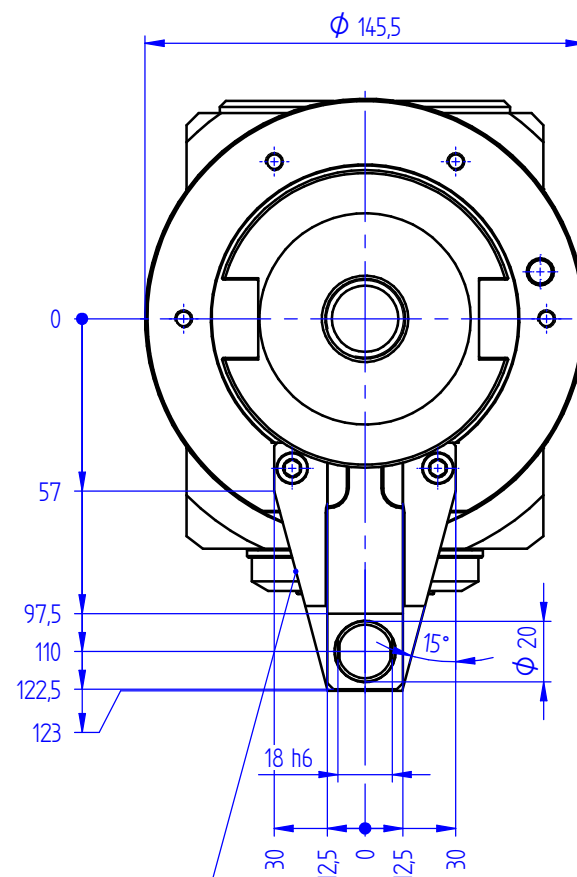

Lage der Drehmomentstütze kann zu den Nuten der Welle eingestellt werden
Position of the location device can be adjusted to the slots at the taper
La position du segment d'arrêt peut être ajustée à la rainure du cône

Winkelkopf 7 030 67 055
Angle head 7 030 67 055
Tête angulaire 7 030 67 055


360° drehbar
360° turnable
pivotable à 360°

Skalierung
graduation
graduation

Gehäusenull
gauge line of housing
cote zéro-corps de porte

Arreterring muß beim Kunden eingestellt werden
ring has to be adjusted by customer
la bague d'arrêt doit être ajustée par le client




ANSI B 5.50 CAT 50 inch

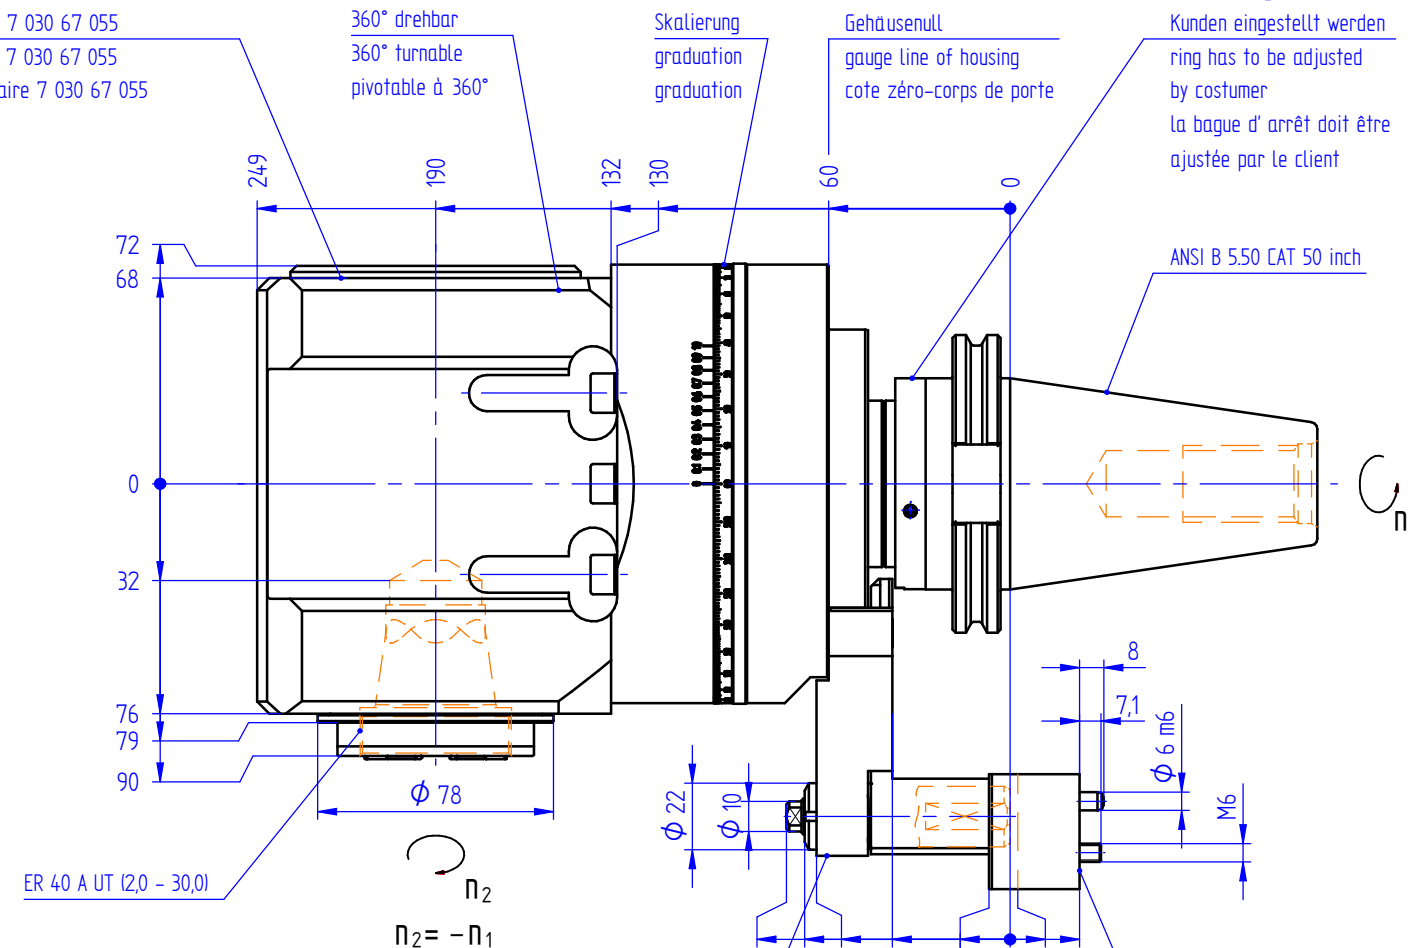

Drehmomentstütze 7 789 99 114
location device 7 789 99 114
segment d'arrêt 7 789 99 114

Hub 4mm
stroke 4mm
course 4mm

Stopp-Block 7 742 99 049
stop-bloc 7 742 99 049
stop-bloc 7 742 99 049

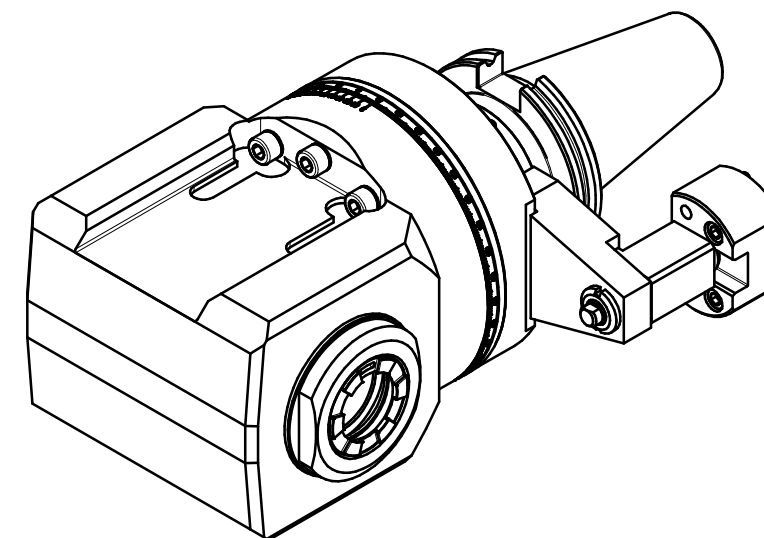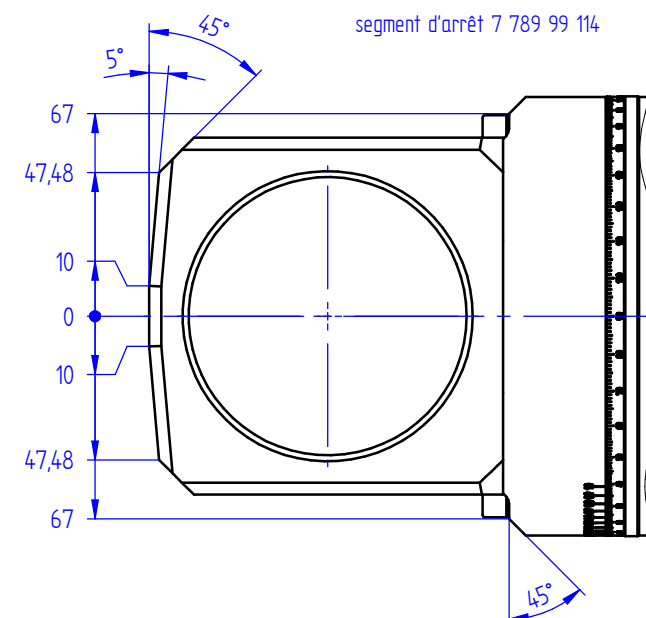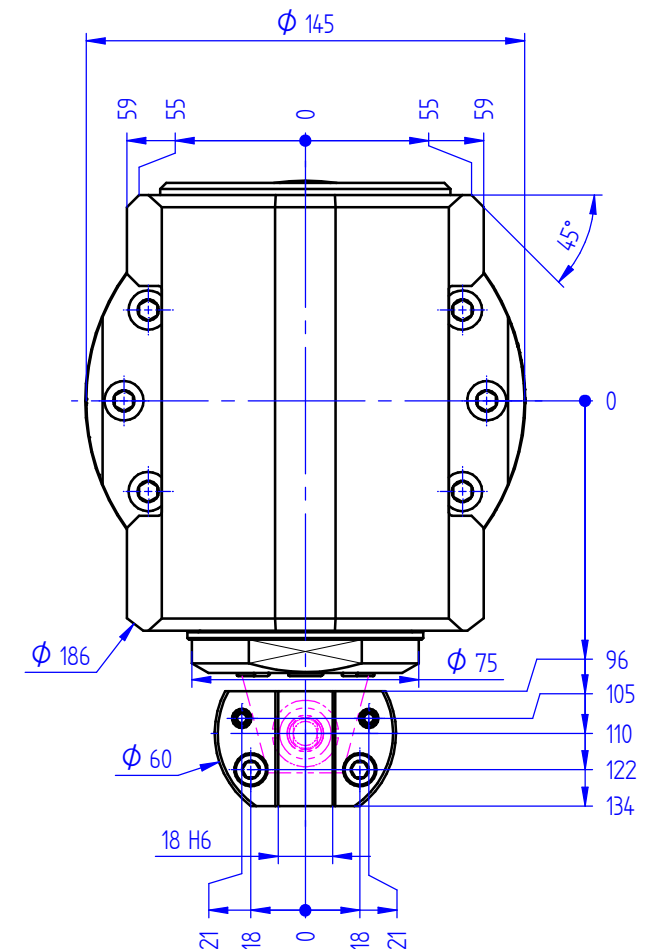

$M_2 \text{ max. [Nm]} = 120$
 $n_2 \text{ max. [min}^{-1}\text{]} = 6000$

Bestell - Nr.
ref.no. / No.de cde.

7 030 67 056

Optionen :
options :
options :



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques