


Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale




Darstellung symbolisch
symbolical drawing
schéma symbolique

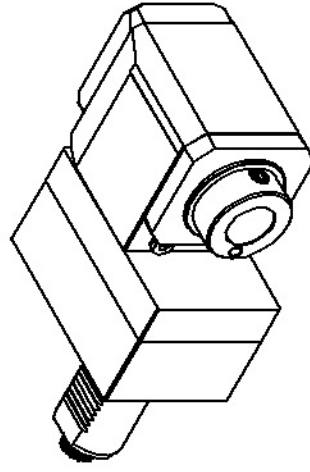


bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté



easy-quick HTS

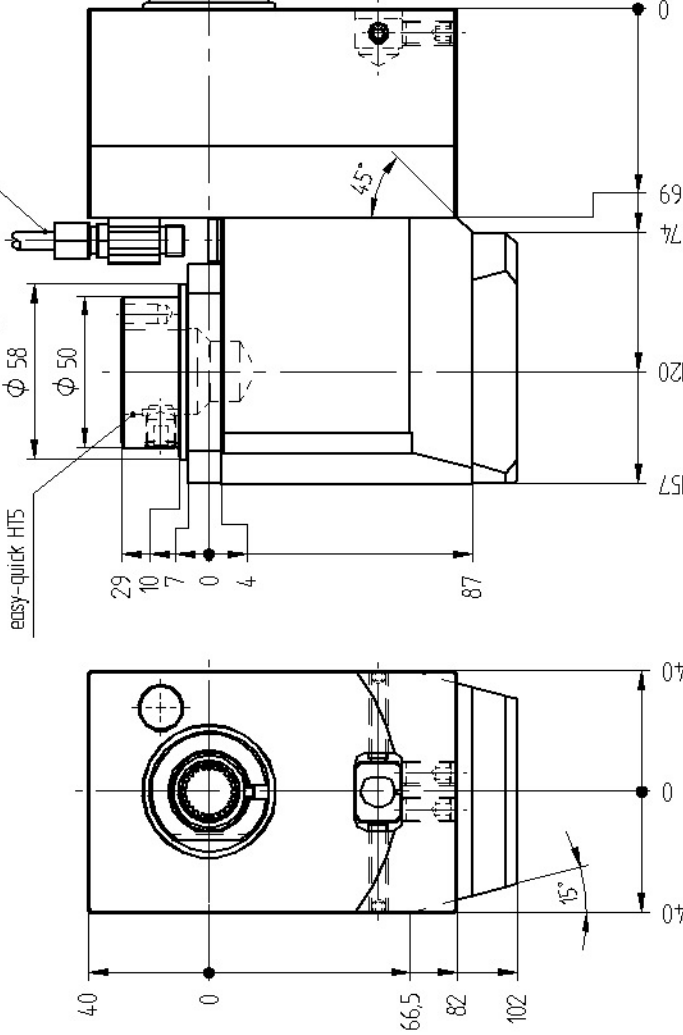

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

p max. [bar] = 140
i = 11
M₂ max. [Nm] = 50
n₂ max. [min⁻¹] = 6000

Bestell - Nr.

ref.no. / No de cde.

8 033 47 030

nous nous réservons toutes modifications techniques