


Axial-Bohr- und Fräskopf

Axial drilling and milling head



Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

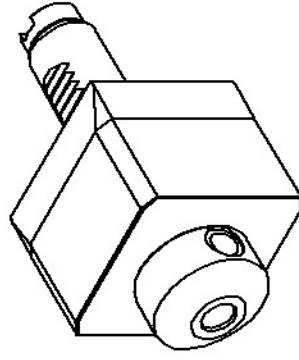

bei externer Kühlmittelfzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

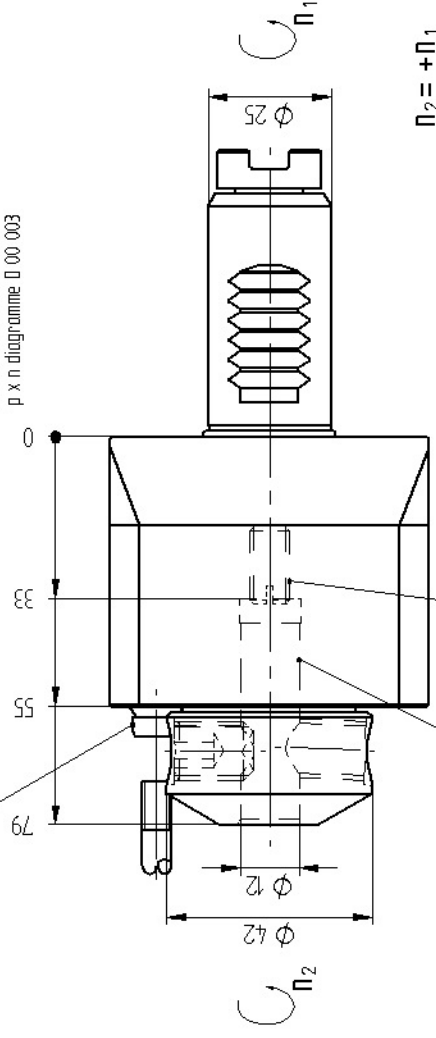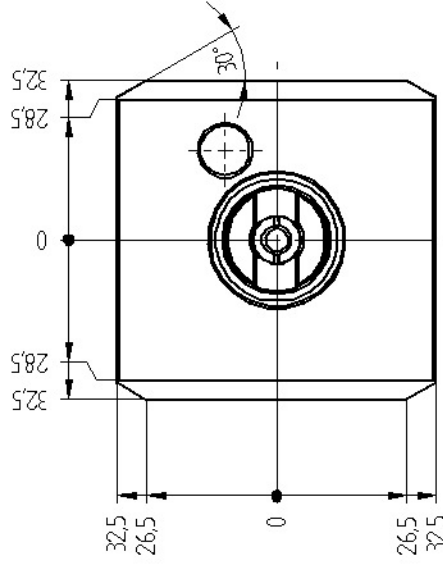

Weldan / Whistle - Notch 12

einstellbarer Werkzeuganschlag
Toolstop adjustable
butée réglable

Optionen :
options :
options :



Bedienschlüssel
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

subject to technical changes

nous nous réservons toutes modifications techniques

p max. [bar] = 25
i = 1:1
M₂ max. [Nm] = 16
n₂ max. [min⁻¹] = 6000

Bestell - Nr.

ref.no. / No de cde.

8 010 24 027