


Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale




Darstellung symbolisch
symbolical drawing
schéma symbolique

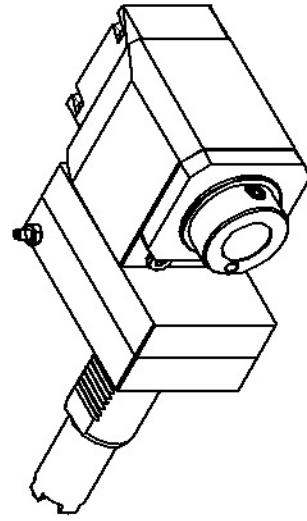


bei externer Kühlmittelzufuhr
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

easy-quick HT5

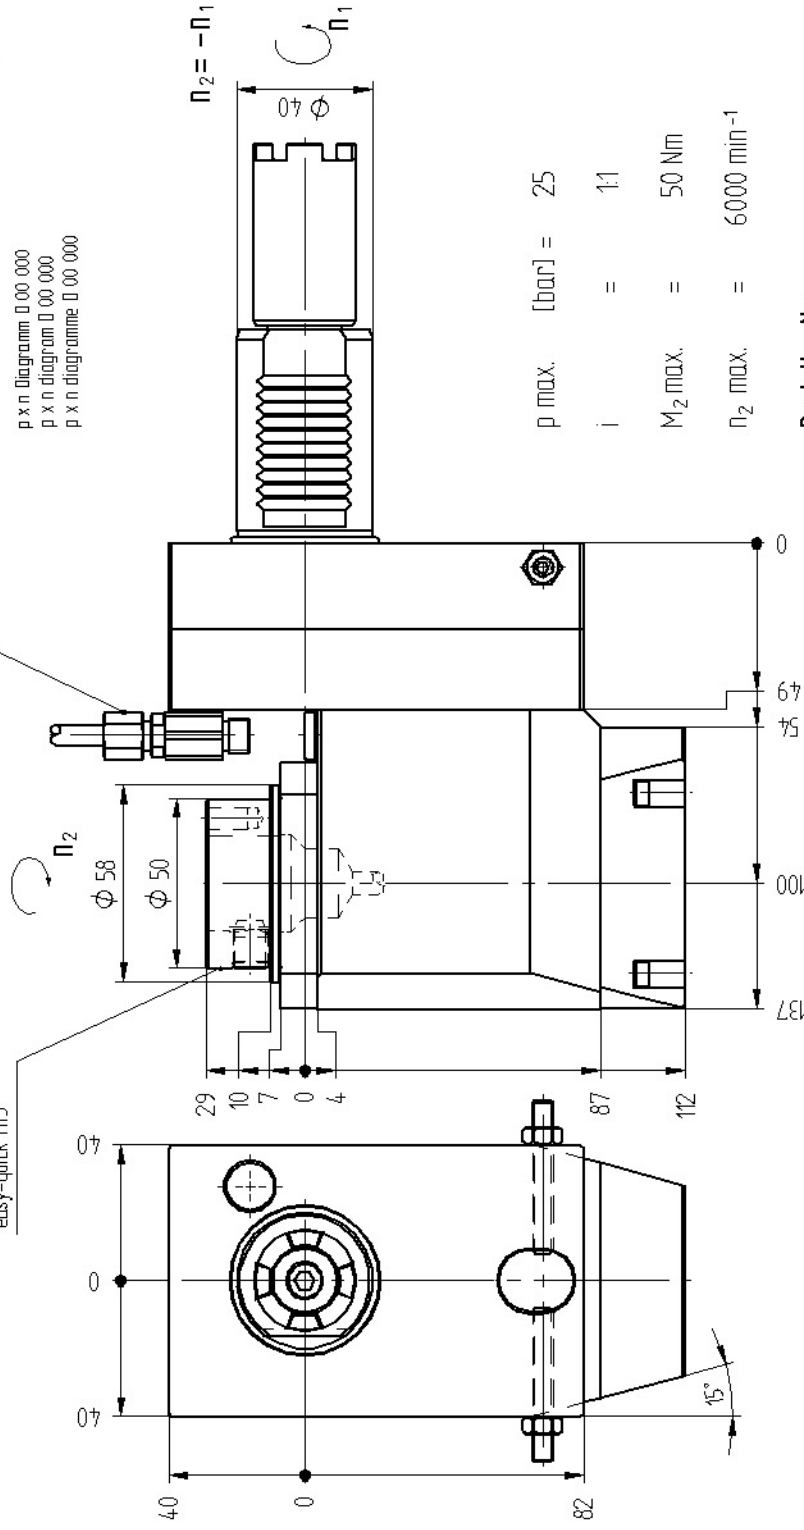

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienchlüssel
wrench
clé

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

subject to technical changes

Bestell - Nr.

ref.no. / No.de cde.

8 033 47 037

p max. [bar] = 25
i = 1:1
M₂ max. = 50 Nm
n₂ max. = 6000 min⁻¹

nous nous réservons toutes modifications techniques