



Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

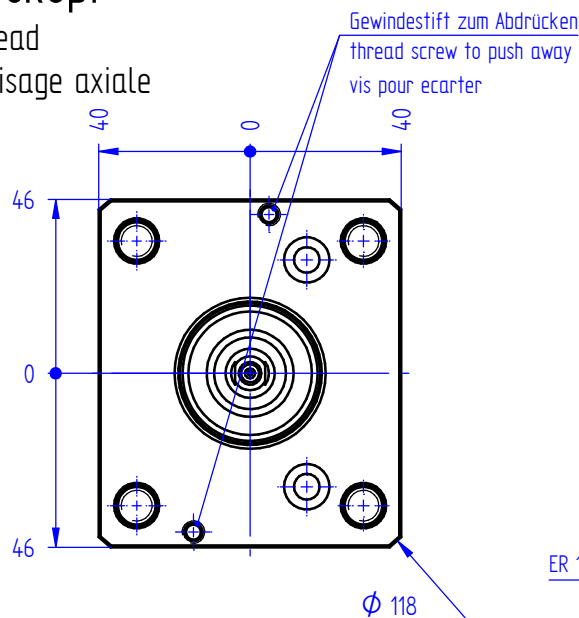

Optionen :
options :
options :



Wechseleinsatz u-tec
insert u-tec
insert u-tec




Spannzangen
collets
Les pinces




Gewindebohrzangen
tapping collets
pincettes de taraudage




Bedienschlüsselsatz
set of wrench
jeu de clés

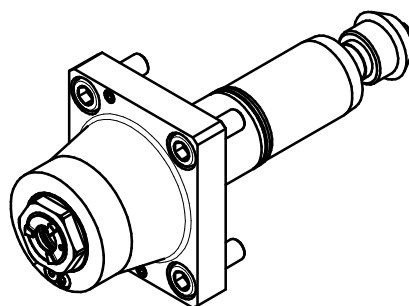

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

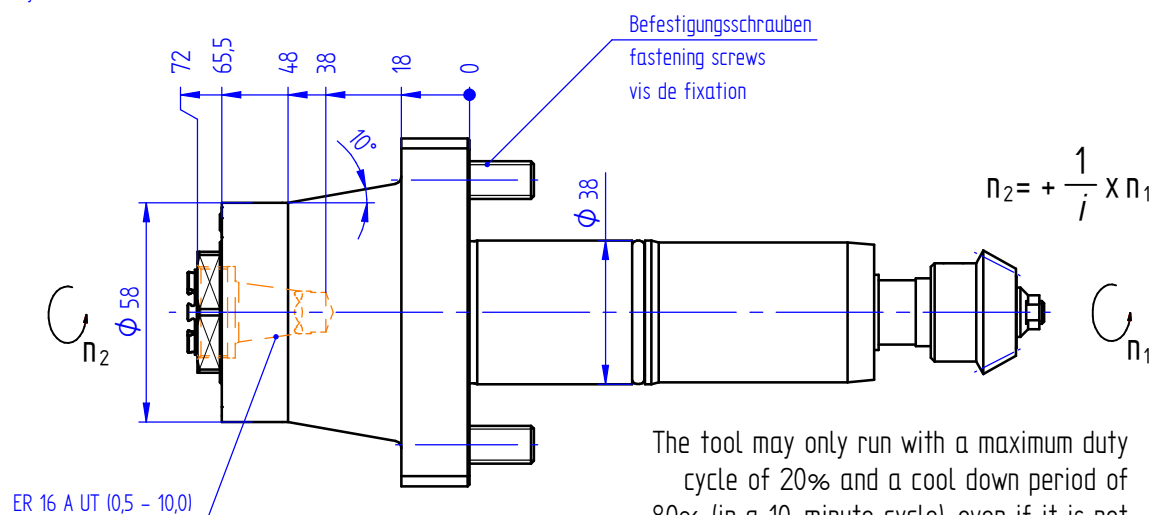

The tool may only run with a maximum duty cycle of 20% and a cool down period of 80% (in a 10-minute cycle), even if it is not in the operating position.

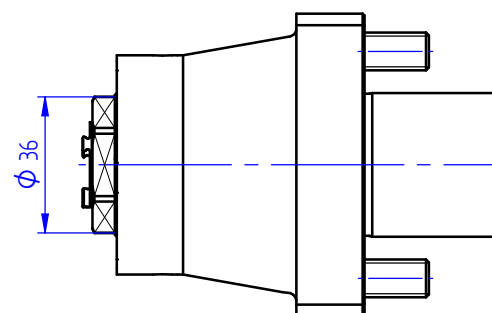

i = 1:4
M₂ max. [Nm] = 5
n₂ max. [min⁻¹] = 24000

Bestell - Nr.
ref.no. / No.de cde.

8 013 34 009