

Axial-Bohr- und Fräskopf


Axial drilling and milling head
Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique


bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

56,0 max.
49,5 min.

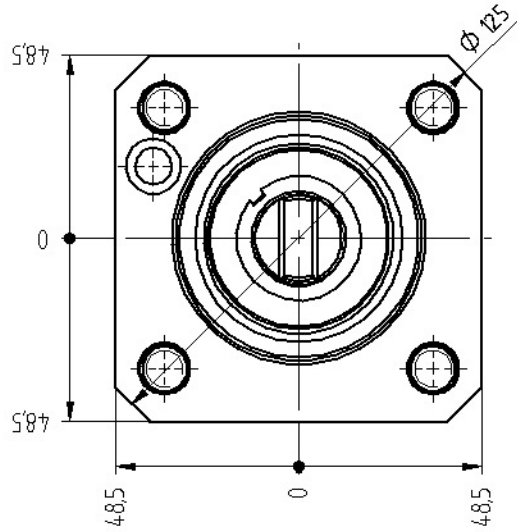


0
7
21
17,5

Befestigungsschrauben
fastening screws
vis de fixation

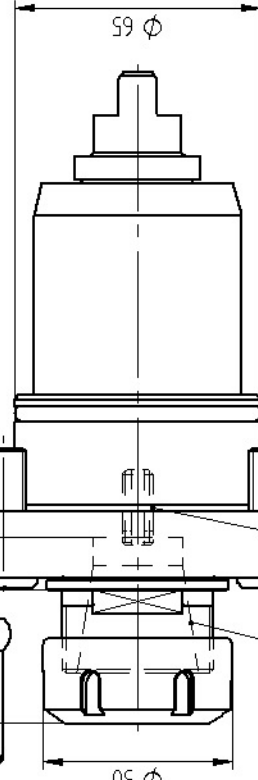

p max. [bar] = 25
i = 1:1
M₂ max. [Nm] = 50
n₂ max. [min⁻¹] = 6000

ER 32 (10 - 20,0)
einstellbarer Werkzeugschlag
tool stop adjustable
butée réglable




Optionen :
options :
options :



Dichtschreiben
sealings
joints



Spannzangen
collets
les pinces



Bedienschlüsselsatz
set of wrench
jeu de clés

Bestell - Nr.
ref.no. / No de cde.

8 010 66 002

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques