



Winkelkopf

Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

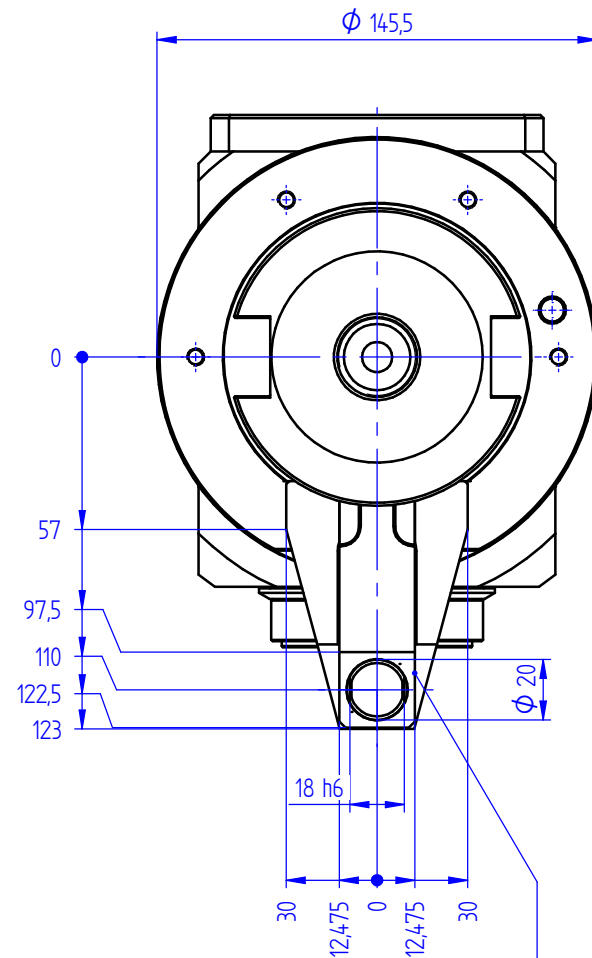

Lage der Drehmomentstütze kann zu den Nuten der Welle eingestellt werden
position of the location device can be adjusted to the slots at the taper
la position du segment d'arrêt peut être ajustée à la rainure du cône

Winkelkopf 7 030 65 017
angle head 7 030 65 017
tête angulaire 7 030 65 017

360° drehbar
360° turnable
pivotable à 360°

Skalierung
graduation
graduation


Gehäusenull
gauge line of housing
cote zéro-corps de porte

Arreterring muss beim Kunden eingestellt werden
ring has to be adjusted by customer
la bague d'arrêt doit être ajustée par le client

ANSI B 5.50/ CAT 50 inch




$n_2 = -n_1$

n_1

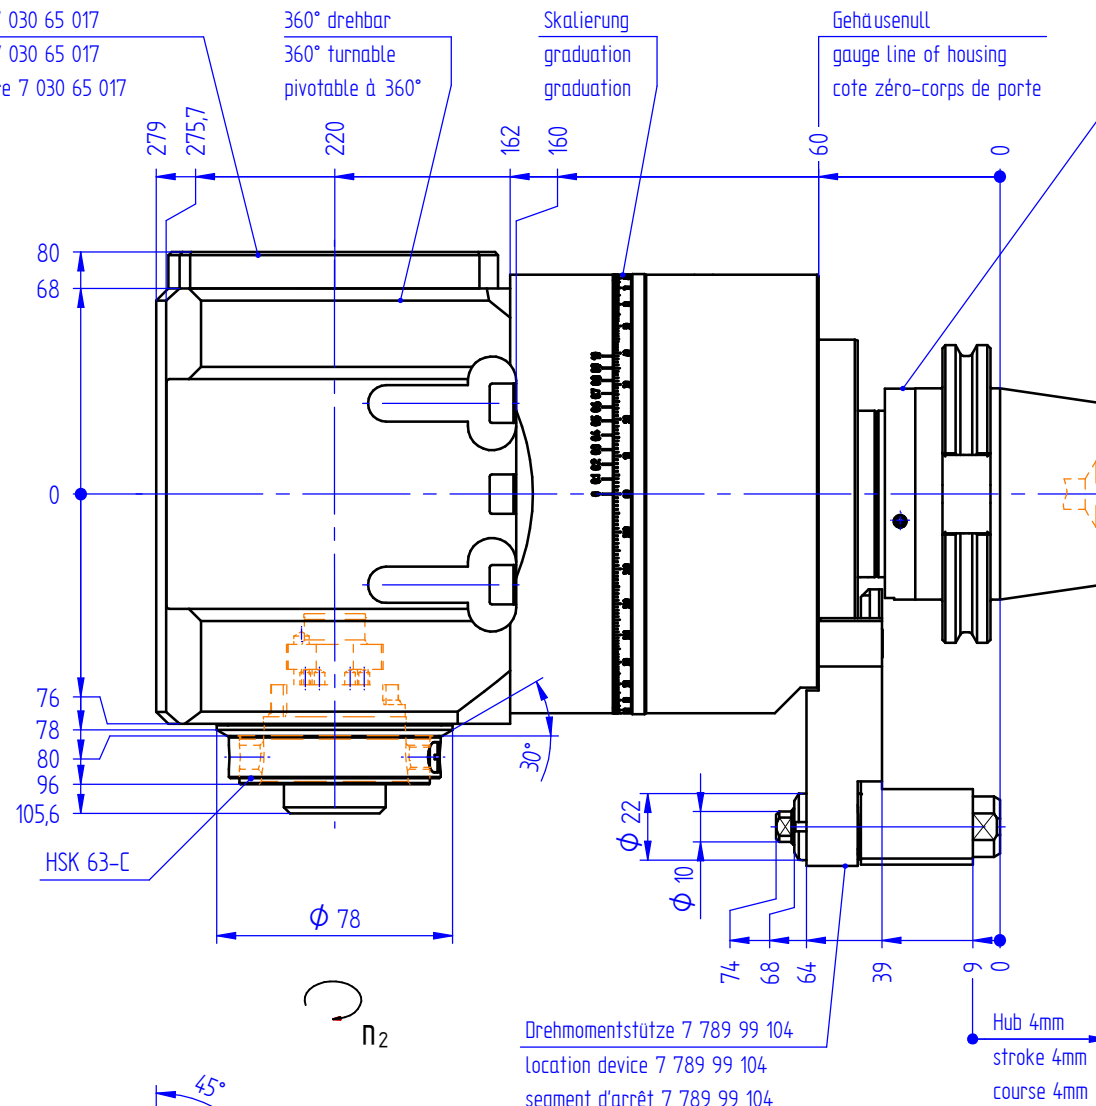

Drehmomentstütze 7 789 99 104
location device 7 789 99 104
segment d'arrêt 7 789 99 104

Hub 4mm
stroke 4mm
course 4mm

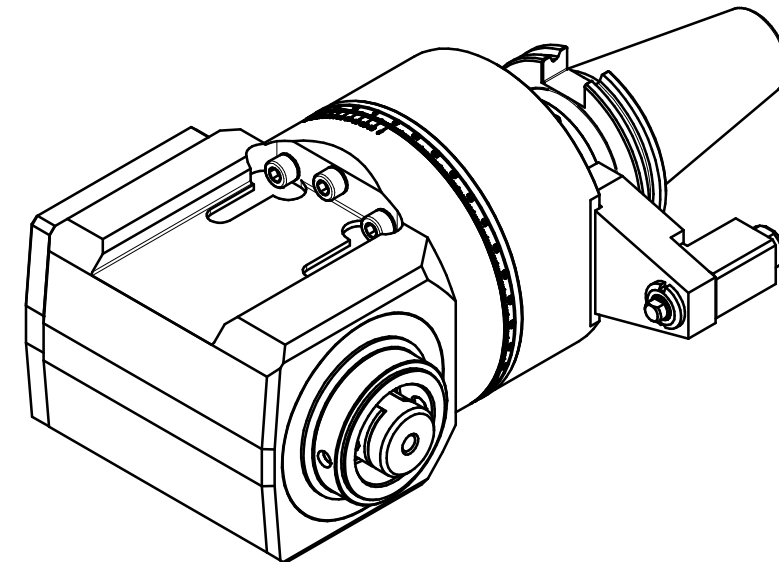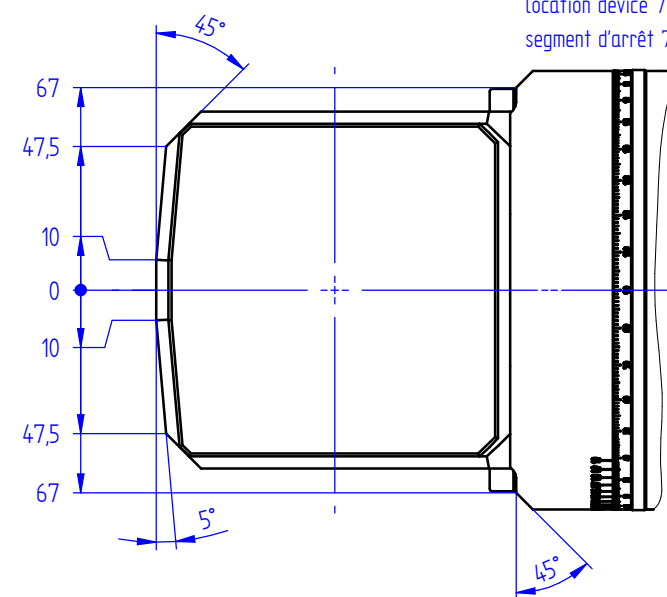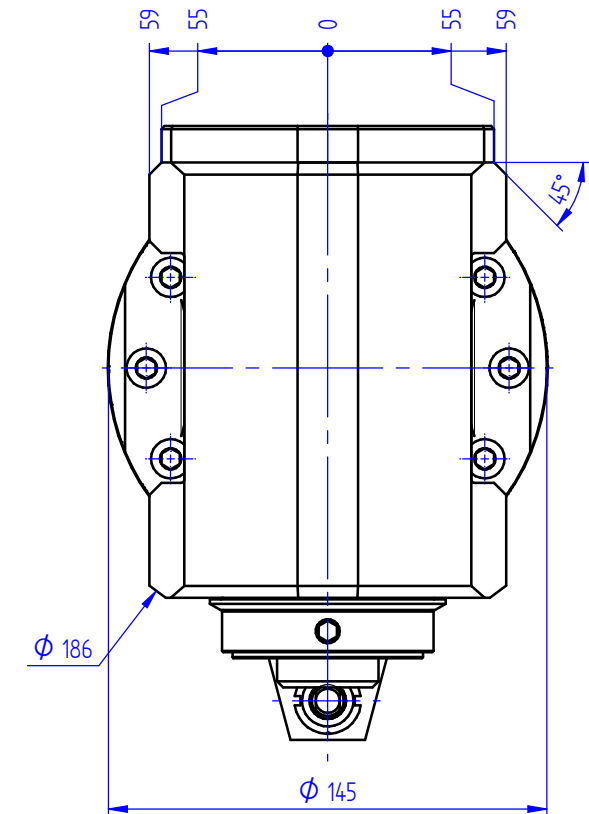

p max.	[bar]	=	70
i		=	1:1
M ₂ max.	[Nm]	=	120
n ₂ max.	[min ⁻¹]	=	6000

Bestell - Nr.
ref.no. / Node cde.

7 030 65 016

Optionen :
options :
options :



Bedienschlüssel
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques