


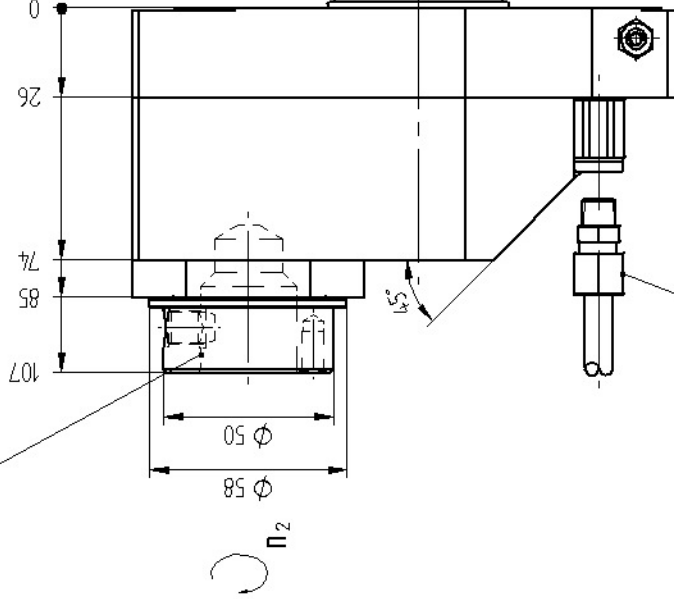
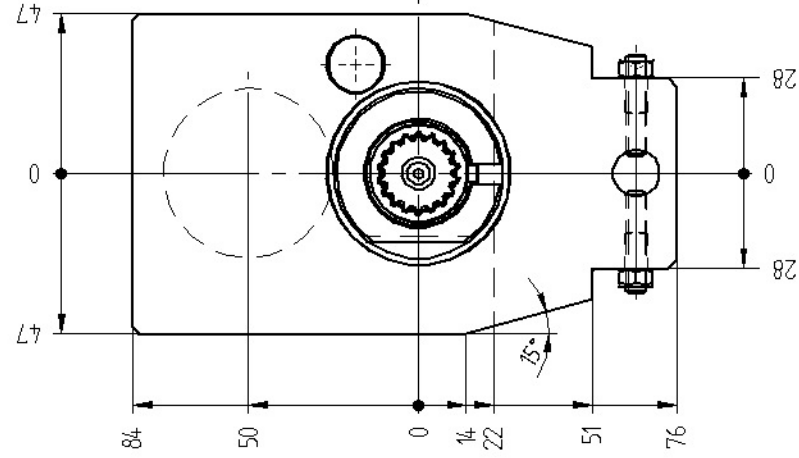

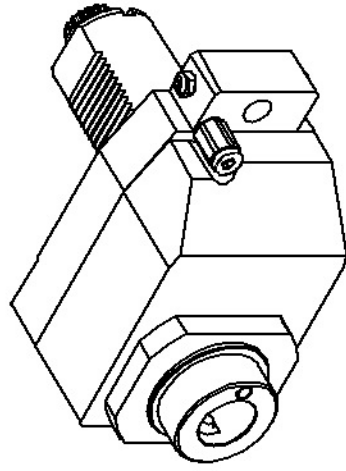
Axial-Bohr- und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

 $i \neq 1$

Trockenlauf bedingt möglich

use without coolant partly possible

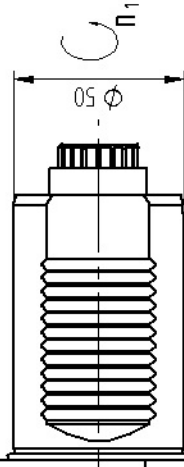
l'utilisation sans arrosage est partiellement possible

pxn Diagram 0 00 000

$p \times n$ diagram $\square 00\ 000$

p x n diagramme 0 00 000

$$n_2 = -\frac{1}{x} n_1$$


$$p_{\max.} = 25 \text{ bar}$$

1311

$$M_{2 \text{ max.}} = 16 \text{ Nm}$$
$$n_2 \text{ max.} = 12000 \text{ min}^{-1}$$

Bestell - Nr.:

ref.no. / No.de cde.

8 019 57 017

bei externer Kuhlmittelfzufuhr Verschlussschraube durch Kuhlrohr ersetzen
using external coolant supply, please substitute locking screw by coolant tube
pour arrosage externe, remplacez la vis par le tube fileté

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

subject to technical changes

Optionen :
options :
options :



wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienschlüssel
wrench
clé

Technische Änderungen vorbehalten

nous nous réservons toutes modifications techniques