


Schwenkkopf




Milling and drilling head, swivelling

Tête pivotante


+135° / -30° Schwenkbar
+135° / -30° swivelling
+135° / -30° pivotant



Darstellung symbolisch
symbolical drawing
schéma symbolique

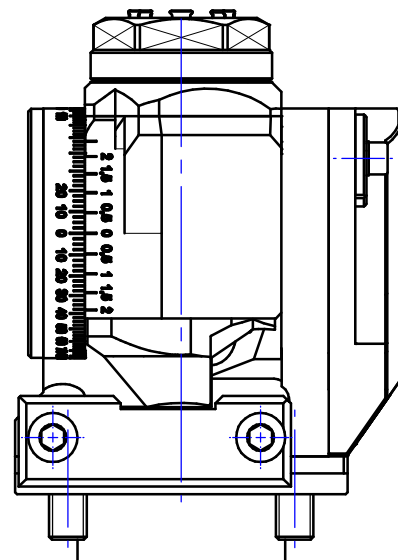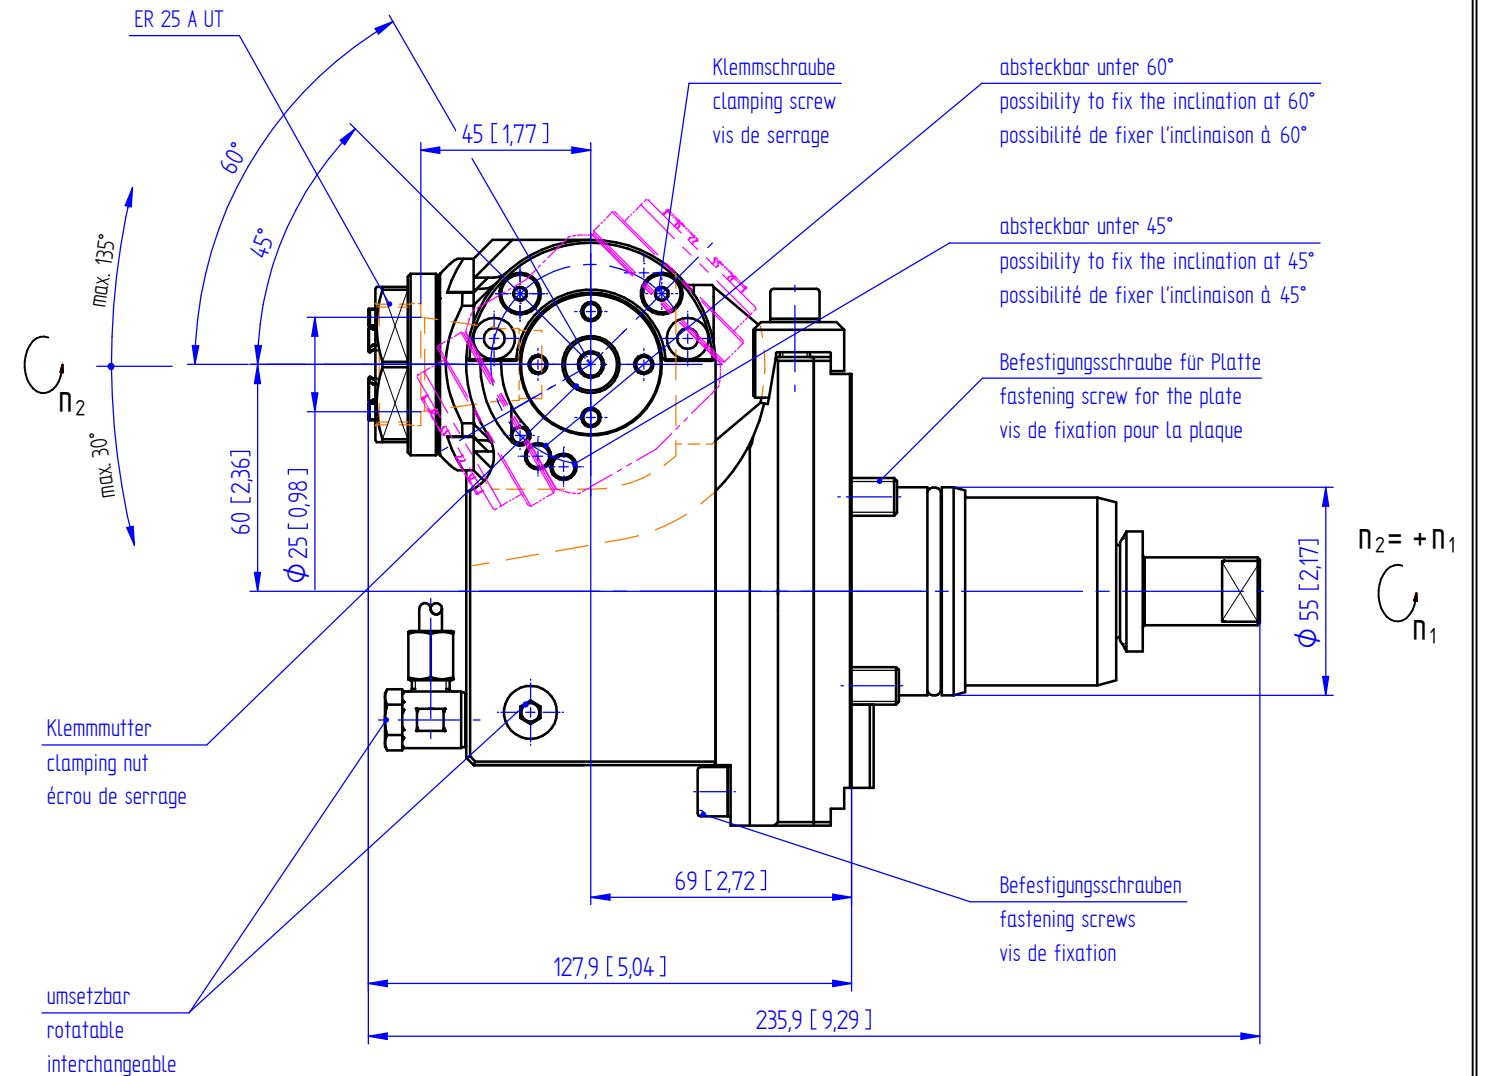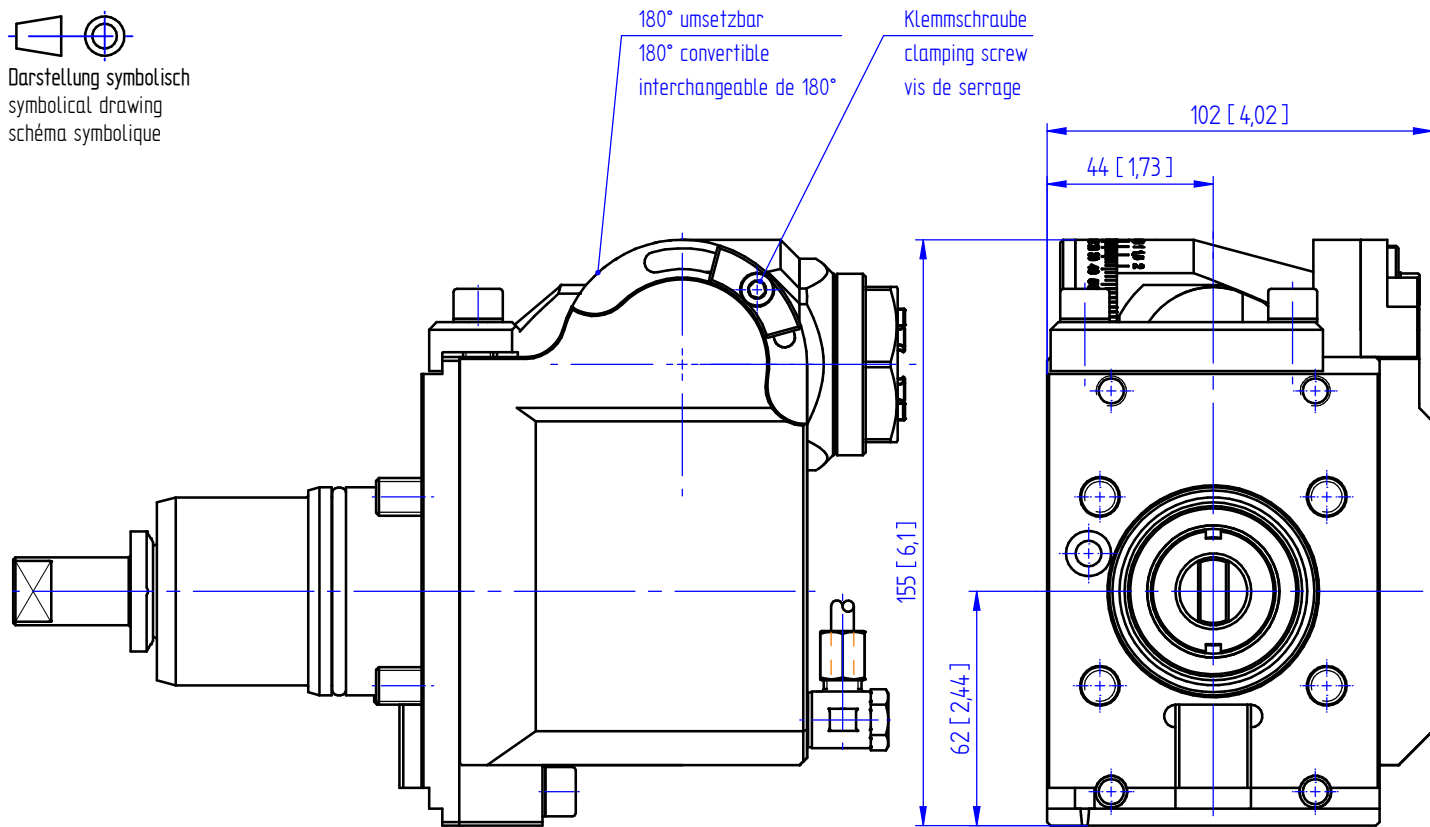

Gewindestift zum Abdrücken
thread screw to push away
aide au démontage

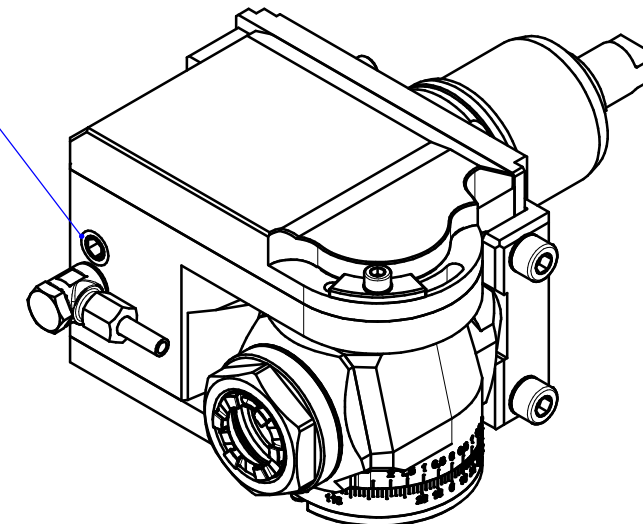

p max. [bar/psi] = 140 / 2030

i = 1:1

M₂ max. [Nm] = 25

n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 043 55 033

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Wechseleinsatz u-tec
insert u-tec
insert u-tec



Bedienschlüsselsatz
set of wrench
jeu de clés

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques