



Axial-Bohr-und Fräskopf

Axial drilling and milling head


Tête de perçage et de fraisage axiale






Darstellung symbolisch
 symbolical drawing
 schéma symbolique

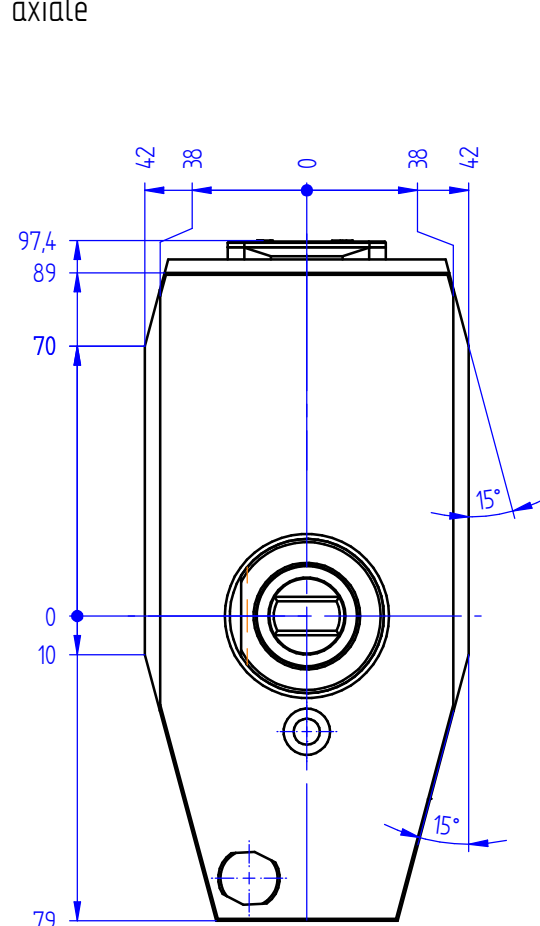


Schnittstellennull
 gauge line of interface
 cote zéro de l'interface

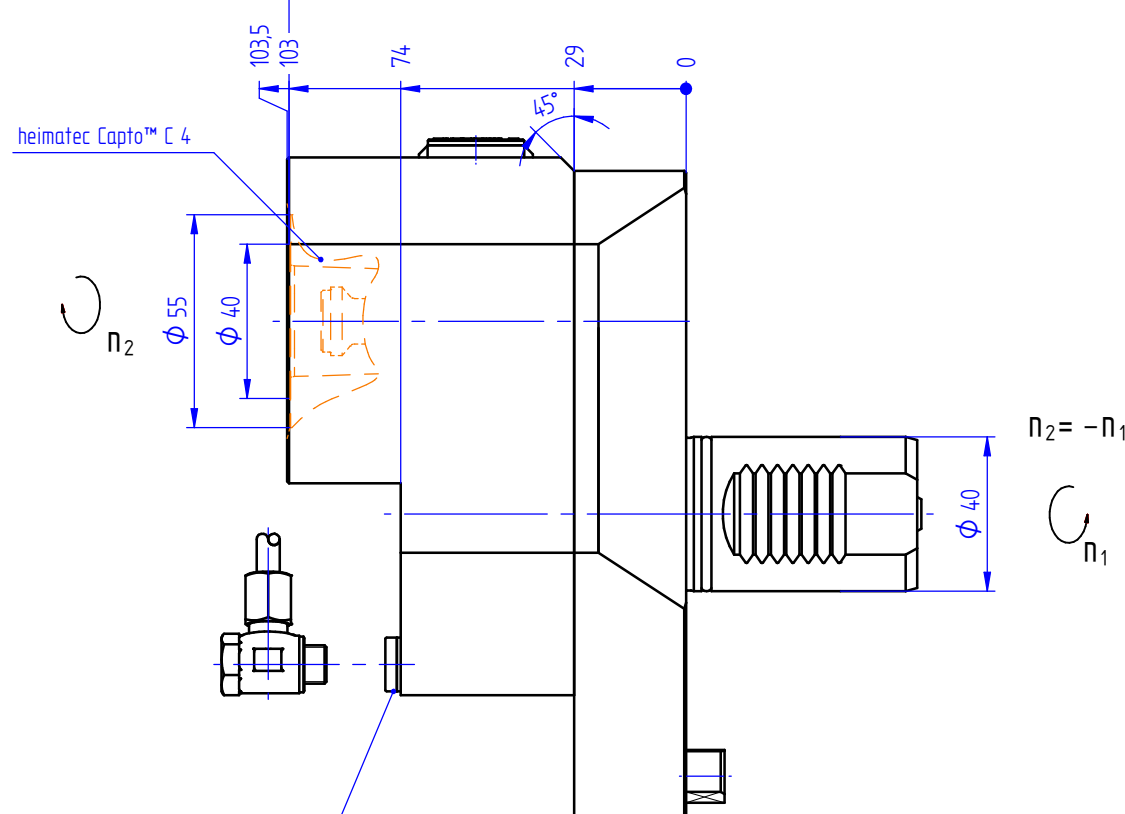

bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen
 using external coolant supply, please substitute locking screw by coolant tube
 pour arrosage externe, remplacez la vis par le tube fileté

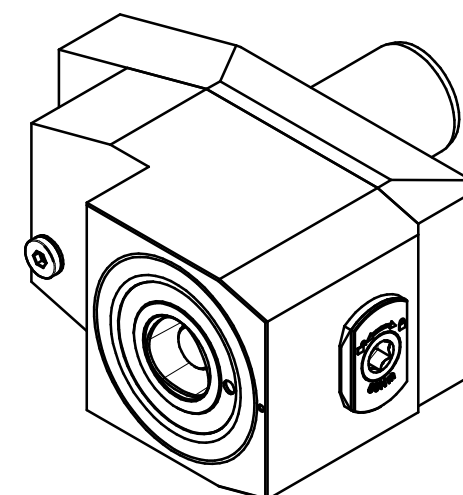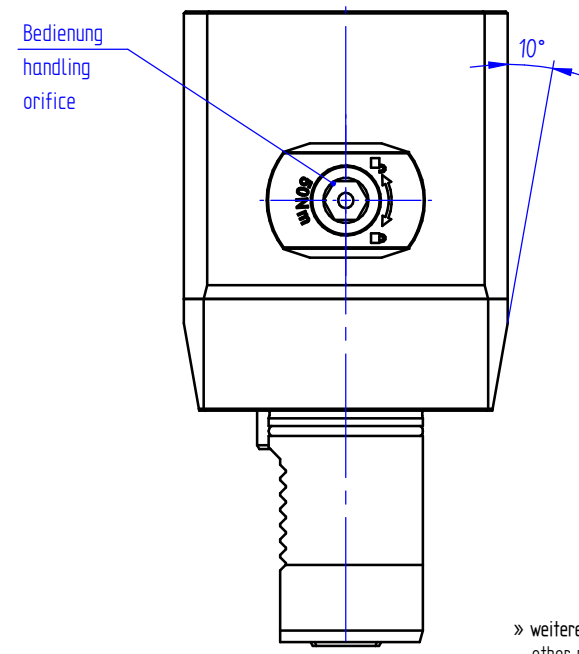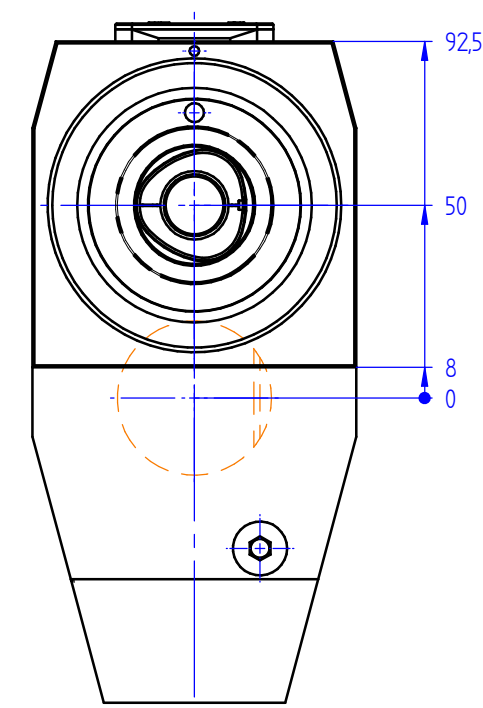

Optionen :
 options :
 options :



Bedienschlüssel
 wrench
 clé

» weitere Ausführungen auf Anfrage
 other models on request
 autres modèles sur demande
 subject to technical changes

p max. [bar] = 140
 i = 1:1
 M₂ max. [Nm] = 50
 n₂ max. [min⁻¹] = 6000

Bestell - Nr.
 ref.no. / No.de cde.

8 019 46 200