


Winkelkopf


Angle head

Tête angulaire



Darstellung symbolisch
symbolical drawing
schéma symbolique

ohne Kühlmittel
without coolant
sans arrosage

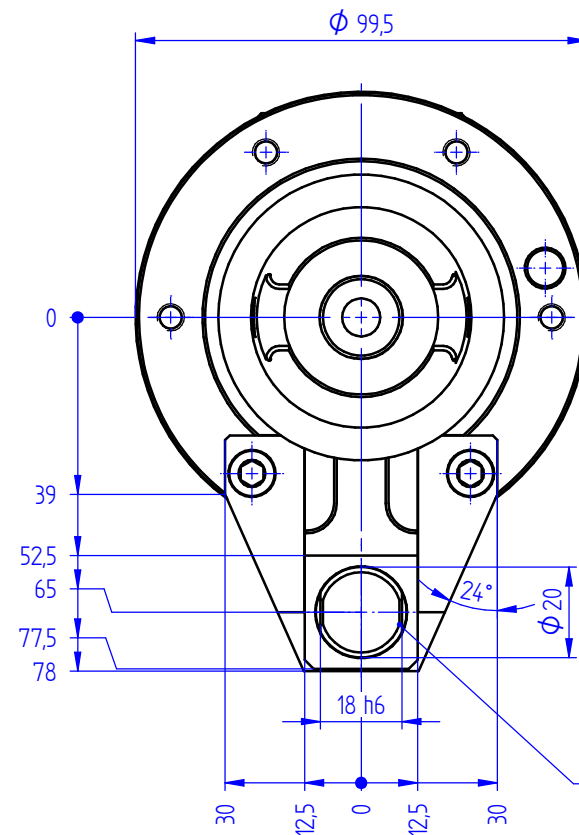

Lage der Drehmomentstütze kann zu den
Nuten der Welle eingestellt werden
Position of the location device can be
adjusted to the slots at the taper
La position du segment d'arrêt peut être
ajustée à la rainure du cône

Winkelkopf 7 033 55 002
Angle head 7 033 55 002
Tête angulaire 7 033 55 002


360° drehbar
360° turnable
pivotable à 360°

Skalierung
graduation
graduation

Gehäusenull
gauge line of housing
cote zéro-corps de porte




Arretiererring muß beim
Kunden eingestellt werden
ring has to be adjusted
by customer
La bague d'arrêt doit être
ajustée par le client

DIN 69893-HSK 63 A

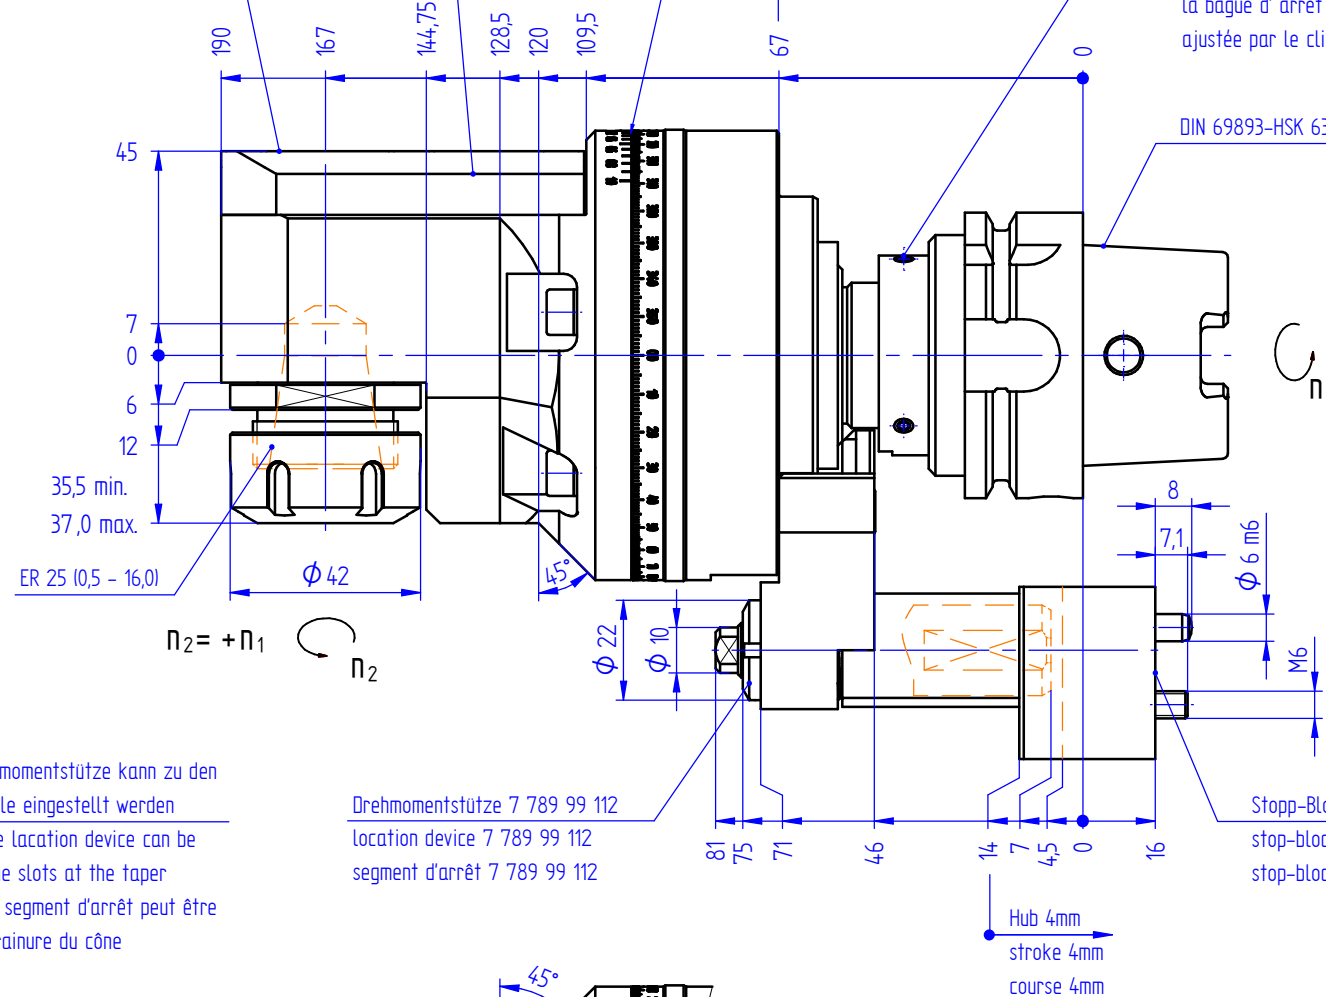

Drehmomentstütze 7 789 99 112
location device 7 789 99 112
segment d'arrêt 7 789 99 112

Stopp-Block 7 742 99 049
stop-bloc 7 742 99 049
stop-bloc 7 742 99 049

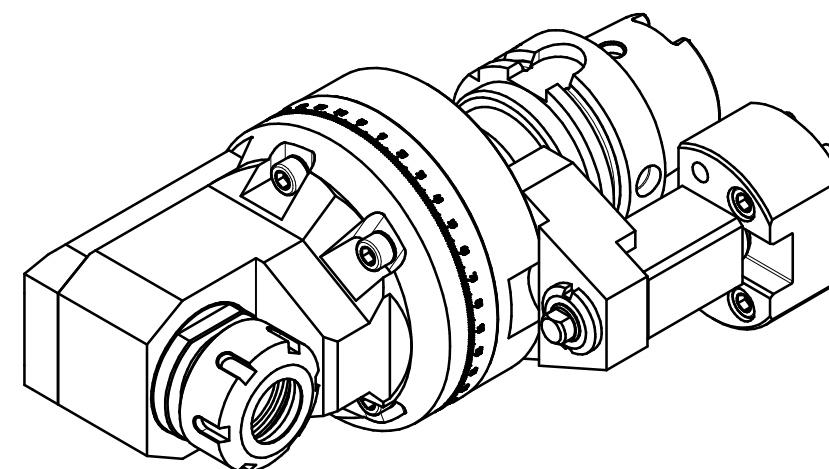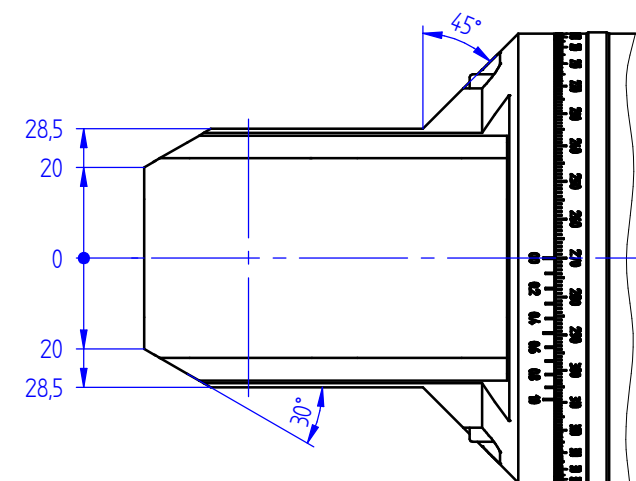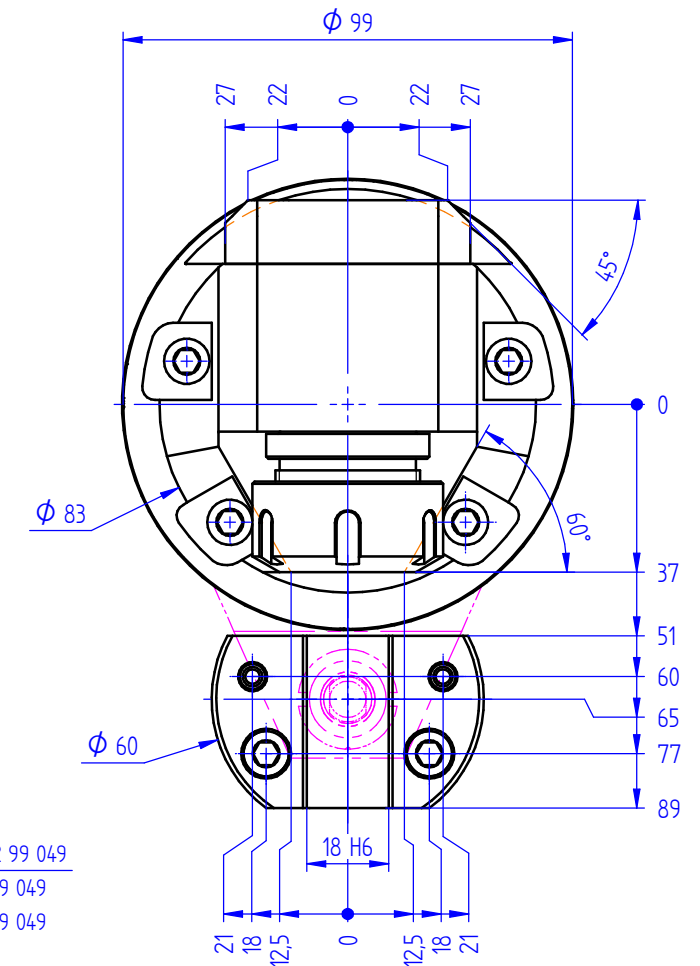

i = 1:1
M₂ max. [Nm] = 25
n₂ max. [min⁻¹] = 8000

Bestell - Nr.
ref.no. / No de cde.
7 033 55 003

Optionen :
options :
options :



Spannzangen
collets
les pinces



Gewindebohrzangen
tapping collets
pinces de taraudage



Bedienschlüsselsatz
set of wrench
jeu de clés

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

nous nous réservons toutes modifications techniques