


Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

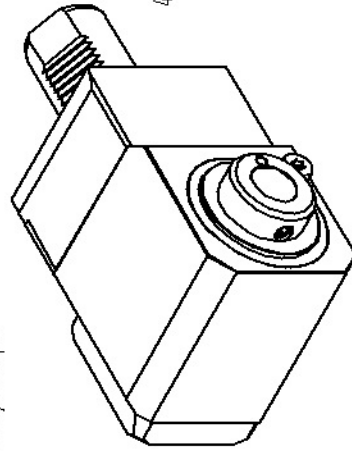



bei externer Kühlmittelzufuhr Verschlusschraube durch Kühlrohr ersetzen

using external coolant supply, please substitute locking screw by coolant tube

pour arrosage externe, remplacez la vis par le tube fileté



easy-quick HT4

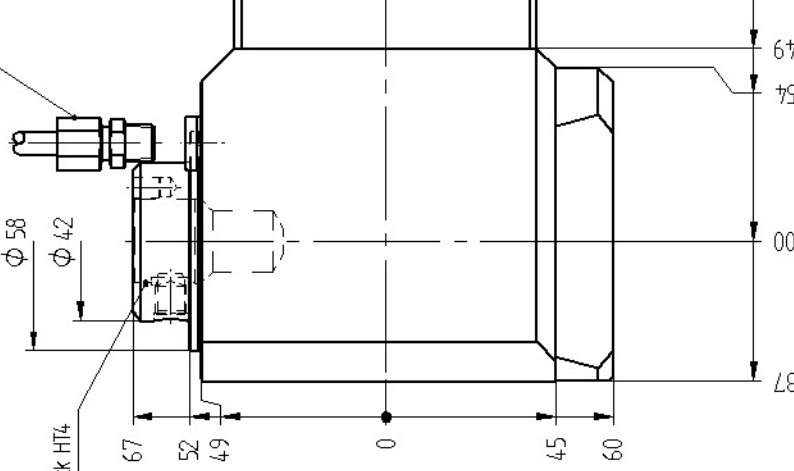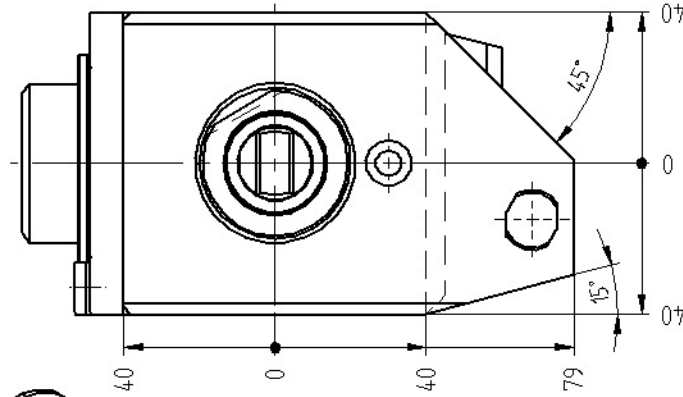

$n_2 = -n_1$

Optionen :
options :
options :



Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienchlüssel
wrench
clé

Technische Änderung vorbehalten

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

Bestell - Nr.

ref.no. / No de cde.

8 030 46 176

p max. [bar] = 140
i = 1:1
M₂ max. [Nm] = 50
n₂ max. [min⁻¹] = 6000

nous nous réservons toutes modifications techniques