


Axial-Bohr- und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique




Dichtscheiben
sealings
joints




Spannzangen
collets
les pinces



\wechseleins
 insert u-ter
 insert ll-ter




Bedienschlüsselsatz
set of wrench
jeu de clés




thread screw to push away

vis pour écarter

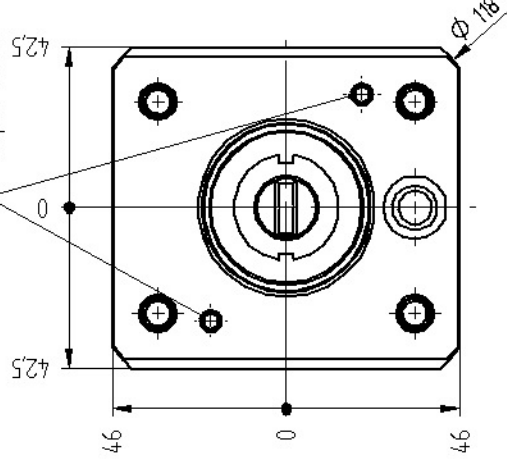

bei externer Kuhlmittelezufuhr Schraube entfernen

for external coolant supply, take off :
pour arrosage externe, enlevez la vis

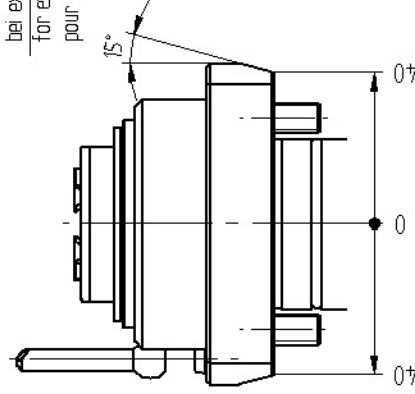

11

 $M_{2\max.} [\text{Nm}] = 50$
$$n_2 \text{ max. } [\text{min}^{-1}] = 6000$$

Bestell - Nr.:

ref.no. / Node rde.

8 010 45 096

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande

Technische Änderungen vorbehalten

nous nous réservons toutes modifications techniques