


Schwenkkopf

Milling and drilling head, swivelling
Tête pivotante



Darstellung symbolisch
symbolical drawing
schéma symbolique

ohne Kühlmittel
without coolant
sans arrosage
± 90° Schwenkbar
± 90° swiveling
± 90° pivotant

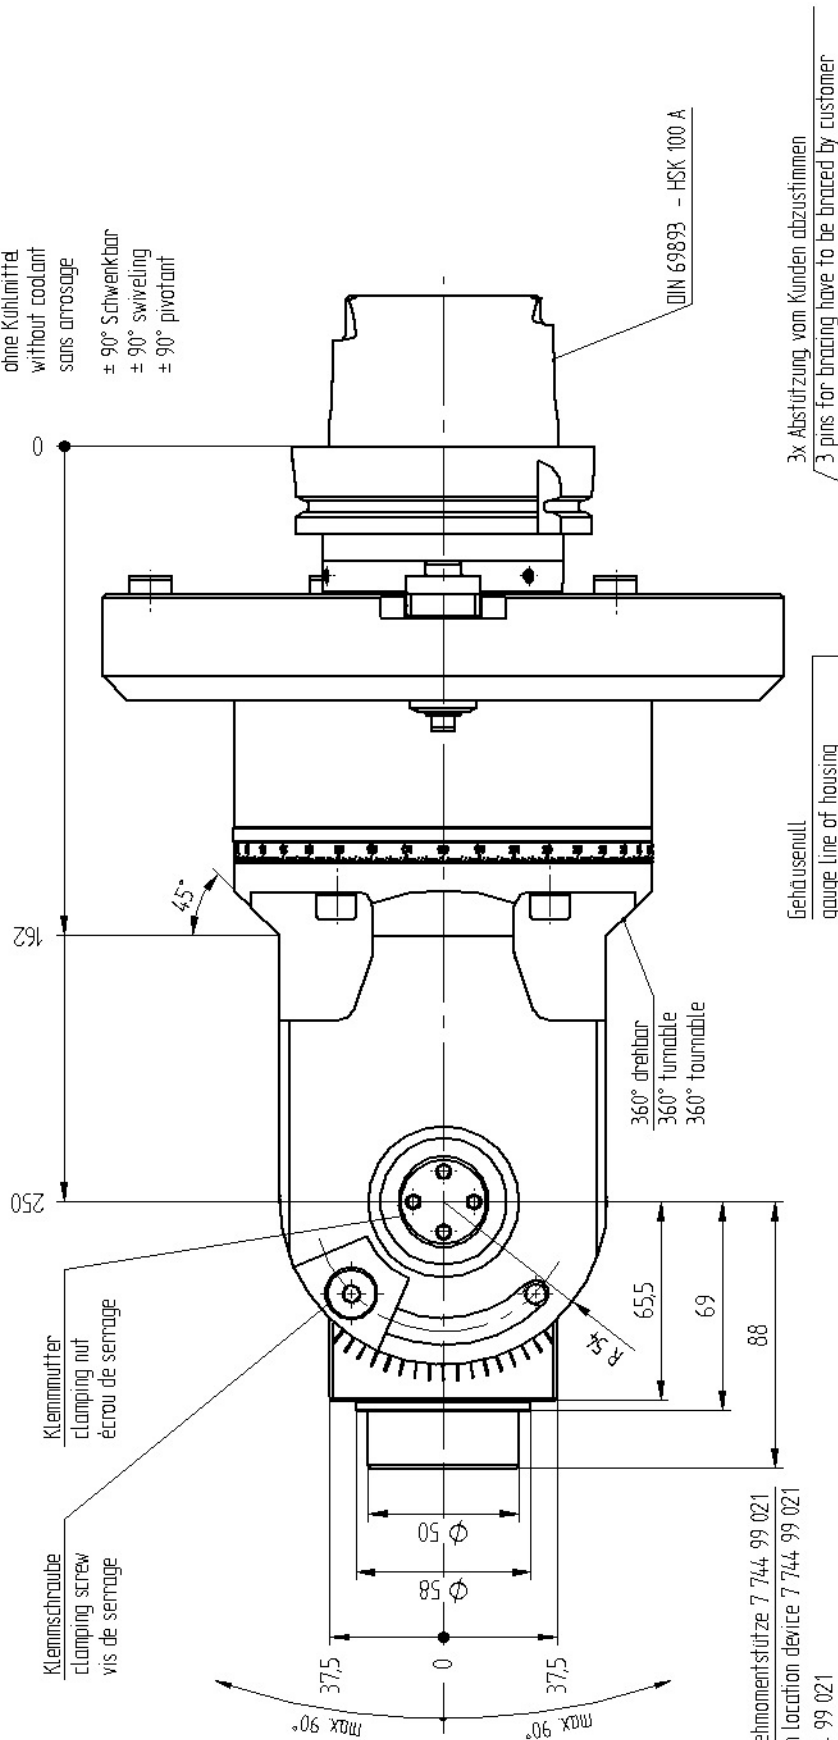


Abstützflansch mit Drehmomentstütze 7 744 99 021
Supporting flange with location device 7 744 99 021
élément d'appui 7 744 99 021

Schwenkkopf 7 049 77 000
Milling and drilling head, swivelling 7 049 77 000
Tête pivotante 7 049 77 000

Gehäusenull
gauge line of housing
cote zéro-corps de porte


3x Abstützung vom Kunden abzustimmen
3 pins for bracing have to be braced by customer
3 tiges de soutient doivent être adaptées par le client

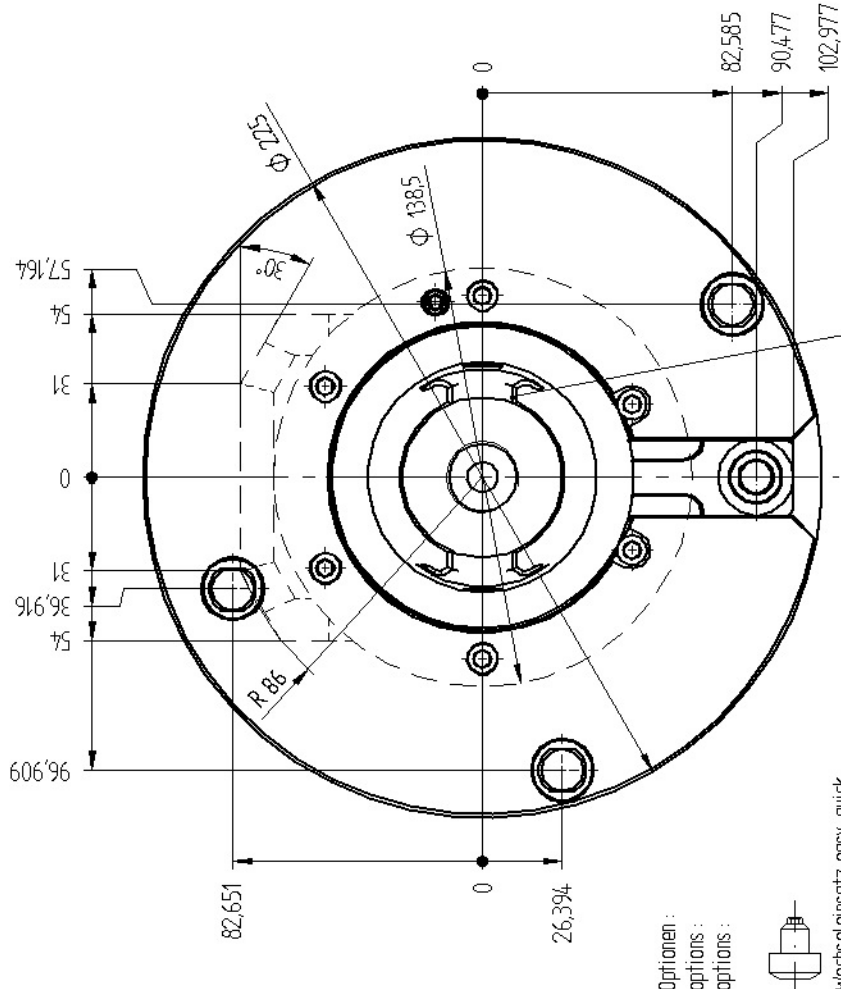

Optionen :
options :
options :




Wechseleinsatz easy-quick
insert easy-quick
insert easy-quick



Bedienwrench
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

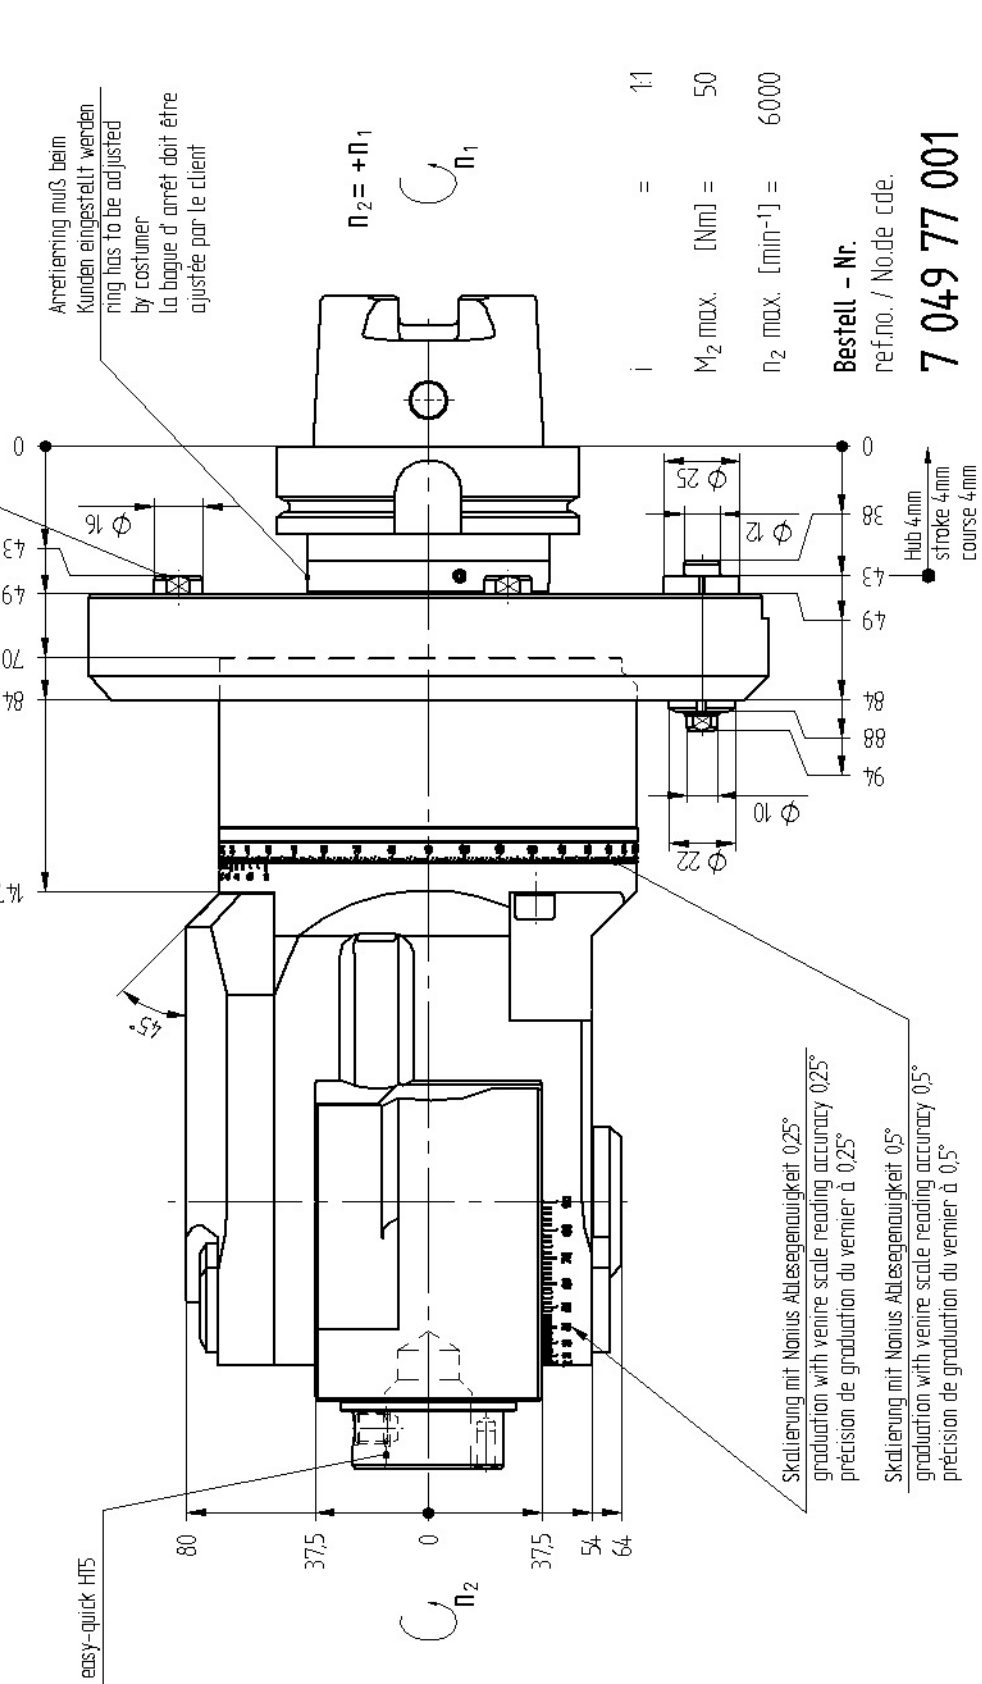

Bestell - Nr.
ref.no. / No.de cde.

7 049 77 001

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques