


## Winkel- Bohr- und Fräskopf

Radial drilling and milling head

Tête de perçage et de fraisage radiale



Darstellung symbolisch  
symbolical drawing  
schéma symbolique

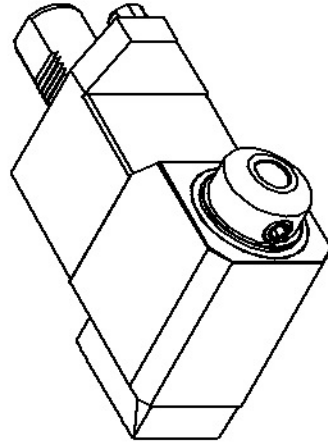


bei externer Kühlmittelfuhr  
using external coolant supply, please substitute locking screw by coolant tube  
pour arrosage externe, remplacez la vis par le tube fileté




$\phi 59$

Wellen / Whistle - Notch 20

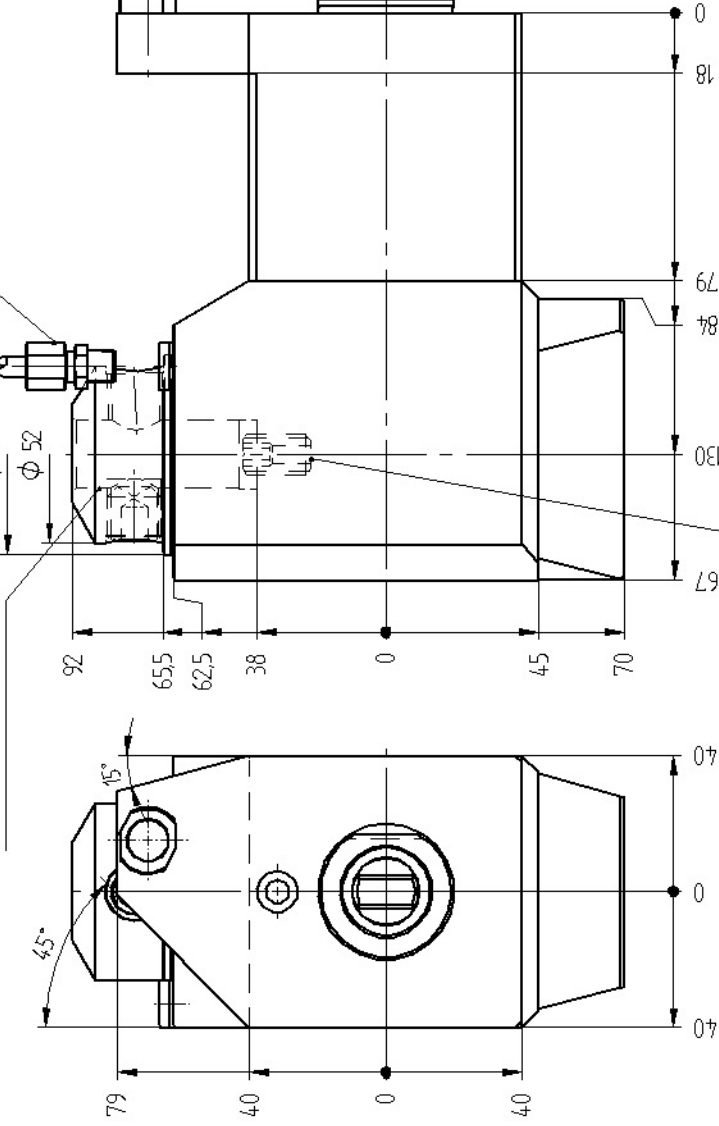

Optionen:  
options:  
options:



Bedienschlüssel  
wrench  
le clé

einstellbarer Werkzeugschlag  
Toolstop adjustable  
butfée réglable

$p_{max.} = 25 \text{ bar}$   
 $i = 1:1$   
 $M_2_{max.} = 50 \text{ Nm}$   
 $n_2_{max.} = 6000 \text{ min}^{-1}$

Bestell - Nr.  
ref.no. / No.de cde.

**8 030 46 192**

» weitere Ausführungen auf Anfrage  
other models on request  
autres modèles sur demande  
subject to technical changes

Technische Änderung vorbehalten

nous nous réservons toutes modifications techniques