


Schwenkkopf


Milling and drilling head, swivelling

Tête pivotante


+105°/ -20° Schwenkbar
+105°/ -20° swiveling
+105°/ -20° pivotant




Darstellung symbolisch
symbolical drawing
schéma symbolique

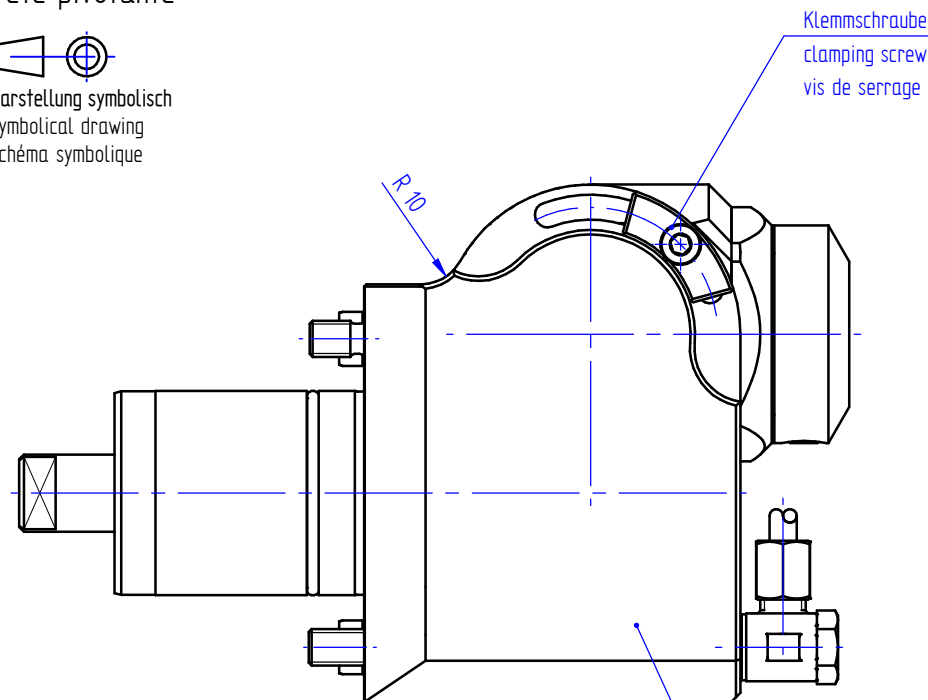

Klemmschraube
clamping screw
vis de serrage

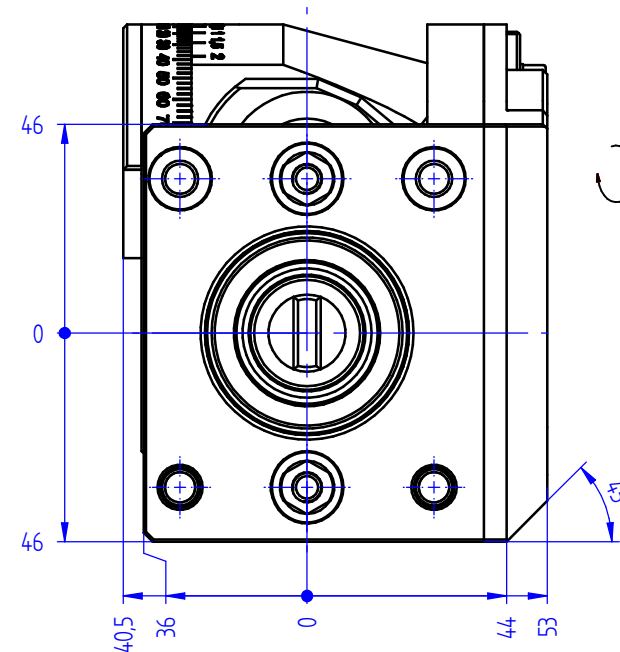


max. 105°
max. 20°
n₂

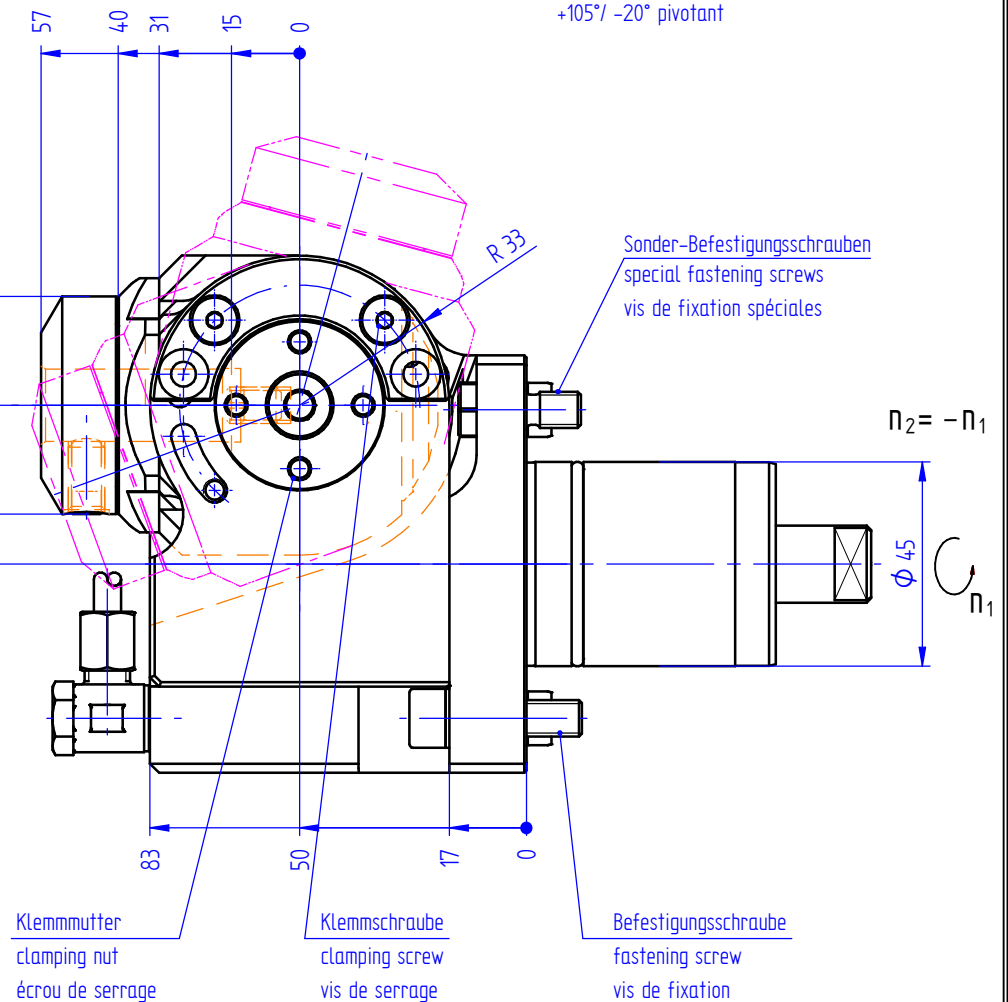

Sonder-Befestigungsschrauben
special fastening screws
vis de fixation spéciales

n₂ = -n₁

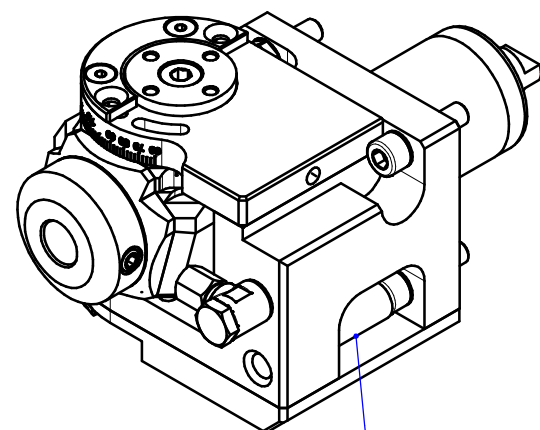


180° umsetzbar
180° convertible
interchangeable de 180°

Hülse zum Abdrücken
(lose beigelegt)
bushing for removing
(included separately)
doville d'extraction
(jointe)

Klemmschraube für
Sonder-Befestigungsschraube (2x)
clamping screw for
special fastening screw (2x)
vis de serrage pour
fixation spéciale (2x)

Diese Sonder-Befestigungsschraube
ist zusätzlich mit Abdruckfunktion
this special fastening screw has
the additional function of removing
vis de fixation spéciale permet
l'extraction de la tête

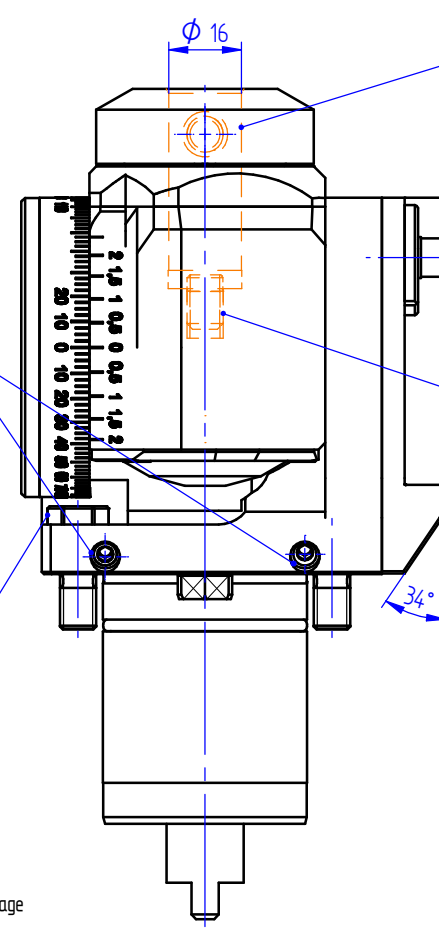

Weldon 16

einstellbarer Werkzeuganschlag
toolstop adjustable
butée réglable

Klemmmutter
clamping nut
écrou de serrage

Klemmschraube
clamping screw
vis de serrage

Befestigungsschraube
fastening screw
vis de fixation

Optionen :
options :
options :



Bedienschlüssel
wrench
clé

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes

i = 1:1
M₂ max. [Nm] = 25
n₂ max. [min⁻¹] = 6000

Bestell - Nr.
ref.no. / No.de cde.

8 043 45 015