


Axial-Bohr-und Fräskopf

Axial drilling and milling head

Tête de perçage et de fraisage axiale



Darstellung symbolisch
symbolical drawing
schéma symbolique

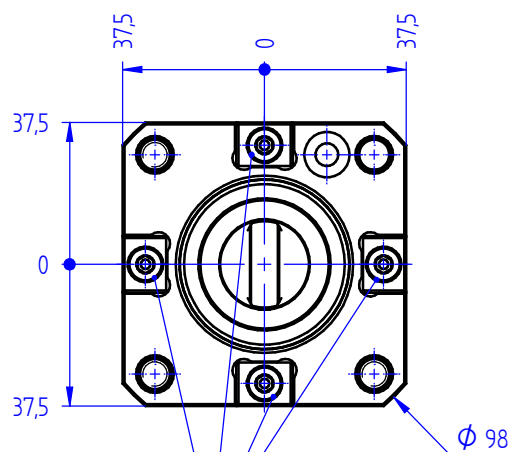

Optionen :
options :
options :



Dichtscheiben
sealings
joints



Spannzangen
collets
les pinces




Bedienschlüsselsatz
set of wrench
jeu de clés



Wechseleinsatz u-tec
insert u-tec
insert u-tec

nicht benötigte Elemente entfernen
remove unneeded parts
retirez les éléments optionels

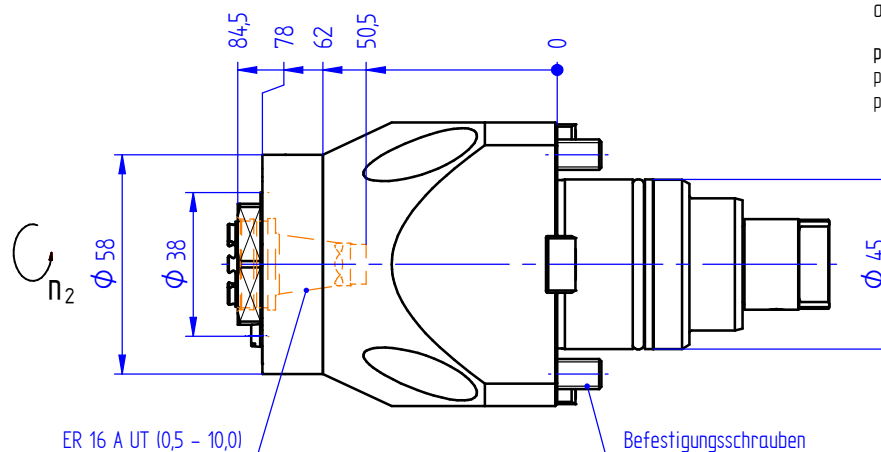

Trockenlauf möglich
dryrun possible
Possibilité d'un fonctionnement à sec

mit innerer Kühlmittelzufuhr für Hochdruck
internal coolant supply (for high pressure)
arrosage interne (pour haute pression)

mit kombinierter Kühlmittelzufuhr
with combined coolant supply
arrosage combiné

p x n Diagramm D 00 017
p x n diagram D 00 017
p x n diagramme D 00 017

$$n_2 = + \frac{1}{i} \times n_1$$

p max. [bar] = 80
i = 1:4
M₂ max. [Nm] = 5
n₂ max. [min⁻¹] = 24000

Bestell - Nr.
ref.no. / No.de cde.

8 013 44 015

nous nous réservons toutes modifications techniques

» weitere Ausführungen auf Anfrage
other models on request
autres modèles sur demande
subject to technical changes